



EULYNX Initiative



Europe's Rail Joint Undertaking

Requirements specification for subsystem Generic IO

Document number: Eu.Doc.45
Version: 4.2 (0.A)

Contents

1	Introduction	1
1.1	Release information	1
1.2	Impressum	1
1.3	Purpose	1
1.4	Applicable standards and regulations	1
1.5	Applicable documents	1
1.6	Terms and abbreviations	1
1.7	Variability management	1
1.8	Definition of object types	2
1.9	Modelling	2
2	Conditions of use	2
2.1	Functional packages	2
3	Functional requirements specification	2
3.1	Subsystem Generic IO - General Infos and Assumptions	2
3.2	Subsystem Generic IO - Logical Viewpoint	2
3.2.1	Subsystem Generic IO - Logical Context	2
3.3	Subsystem Generic IO - Functional Viewpoint	3
3.3.1	Definition of time values	3
3.3.2	Subsystem Generic IO - Functional Context	4
3.3.3	Subsystem Generic IO - Functional Partitioning	17
3.3.4	Subsystem Generic IO - Functional Architecture	18
3.3.5	Subsystem Generic IO - Functional Entities	20
3.4	Subsystem Generic IO - Interfaces	31
3.4.1	SCI-IO (Subsystem - Electronic Interlocking)	31
3.4.1.1	SCI-IO - Logical Viewpoint	31
3.4.1.1.1	SCI-IO - Logical Context	31
3.4.1.2	SCI-IO - Information Flows	31
3.4.1.3	SCI-IO - Functional Viewpoint	33
3.4.1.3.1	SCI-IO - Functional Partitioning	33
3.4.1.3.2	SCI-IO - Functional Architecture	33
3.4.1.3.3	SCI-IO - Functional Entities	34
3.4.2	SMI-IO (Subsystem - Maintenance and Data Management)	42
3.4.3	SDI-IO (Subsystem - Maintenance and Data Management)	42
3.4.4	SSI-IO (Subsystem - Security Services Platform)	42
3.4.5	IO1 (Basic Data identifier)	42
3.4.6	IO5 (Maintainer)	42
3.4.7	IO2 (Adjacent IO Systems)	43
3.4.8	IO3 (Adjacent IO Systems)	43
4	RAMSS Requirements	43
5	Technical requirements	43
5.1	Specific technical interface requirements	43
5.1.1	Interface to the Point of Service Signalling (PoS-Signalling)	43
5.1.2	Interfaces to Adjacent IO System	43
5.1.3	Examples for wiring schemes of Adjacent IO Systems	43
5.2	Time behaviour	43
5.2.1	Response times	44
5.3	Configuration and engineering data	44
5.3.1	Specific data	44


ID	Type	Requirement Part 1	Requirement Part 2	Func. Pkg.
Eu.IO.1	Head	1 Introduction		
Eu.IO.2	Head	1.1 Release information		
Eu.IO.3	Info	[Eu.Doc.45] Requirements specification for subsystem Generic IO CENELEC Phase: 4 Version: 4.2 (0.A) Approval date: 15.06.2023		
Eu.IO.1639	Info	Version history		
Eu.IO.7995	Info	version number: 4.0 (0.A) date: 16.05.2022 author: Jorge Block model version: 18 Generic interface and subsystem requirements version: 4.0 (0.A) Generic interface and subsystem requirements for SCI version: 1.0 (0.A) review: CCB changes: EUIO-368, EUIO-369		
Eu.IO.8028	Info	version number: 4.1 (0.A) date: 06.04.2023 author: Jorge Block model version: 21 Generic interface and subsystem requirements version: 4.0 (0.A) Generic interface and subsystem requirements for SCI version: 1.0 (0.A) review: Cluster changes: EUIO-376, EUIO-377		
Eu.IO.8037	Info	version number: 4.2 (0.A) date: 27.06.2023 author: Jorge Block model version: 22 Generic interface and subsystem requirements version: 4.0 (3.A) Generic interface and subsystem requirements for SCI version: 1.0 (3.A) review: TACS Mirror Group changes: EUIO-378, EUIO-380, EUIO-381, EUIO-385, EUIO-386, EUIO-387, EUIO-389, EUIO-390, EUIO-392, EUIO-394, EUIO-395		
Eu.IO.7	Head	1.2 Impressum		
Eu.IO.8	Info	Publishers: Europe's Rail Joint Undertaking https://rail-research.europa.eu/ EULYNX Initiative A full list of the EULYNX Partners can be found on www.eulynx.eu/index.php/members		
Eu.IO.9	Info	Responsible for this document: EU-Rail System Pillar Trackside Assets Control and Supervision domain		
Eu.IO.1643	Info	Copyright EULYNX Partners All information included or disclosed in this document is licensed under the European Union Public Licence EUPL, Version 1.2 or later.		
Eu.IO.10	Head	1.3 Purpose		
Eu.IO.11	Info	The purpose of the document is the specification of requirements for the Subsystem - Generic IO.		
Eu.IO.12	Info	This document describes functional, non-functional and technical requirements for the Subsystem - Generic IO and functional requirements for interface SCI-IO.		
Eu.IO.13	Info	This document is intended for the following users: <ul style="list-style-type: none"> • safety authorities • infrastructure managers • safety assessors • signalling system suppliers • validators 		
Eu.IO.14	Info	This document is the basis for the implementation by the supplier and for approval by the infrastructure manager.		
Eu.IO.8059	Info	This document is applicable for both the EU-Rail System Pillar target architecture and the EULYNX architecture. The document is delivered as a single specification fitting both the System Pillar documentation sets and the EULYNX documentation sets. EU-Rail System Pillar is the technical authority for this document.		
Eu.IO.16	Head	1.4 Applicable standards and regulations		
Eu.IO.404	Info	A list of applicable standards and regulations used in EULYNX is listed in the EULYNX Reference Document List [Eu.Doc.12].		
Eu.IO.34	Head	1.5 Applicable documents		
Eu.IO.35	Info	The current versions of documents used as input or related to this document are listed in the EULYNX Documentation Plan [Eu.Doc.11]. The relationships between the documents are displayed in the Appendix A1 Documentation plan and structure [Eu.Doc.11_A1].		
Eu.IO.46	Head	1.6 Terms and abbreviations		
Eu.IO.47	Info	The terms and abbreviations are listed in the EULYNX Glossary [Eu.Doc.9].		
Eu.IO.703	Head	1.7 Variability management		

ID	Type	Requirement Part 1	Requirement Part 2	Func. Pkg.
Eu.IO.704	Info	This document describes harmonised requirements. Variability management is not applicable.		
Eu.IO.1644	Head	1.8 Definition of object types		
Eu.IO.1645	Info	The following definition for object types is applied in this document:		
Eu.IO.1646	Info	<ul style="list-style-type: none"> "Req" - This denotes a mandatory requirement. 		
Eu.IO.1649	Info	<ul style="list-style-type: none"> "Info" - This denotes additional information to help understand the specification. These objects do not specify any additional requirements. 		
Eu.IO.1650	Info	<ul style="list-style-type: none"> "Head" - This denotes chapter headings. 		
Eu.IO.48	Head	1.9 Modelling		
Eu.IO.49	Info	The section "Functional requirements specification" follows a model based systems engineering process using Systems Modelling Language (SysML) and defines the functional system requirements for the Subsystem - Generic IO operational in stimulus-response form. Furthermore the information objects (stimuli and responses) exchanged over the interfaces of the Subsystem - Generic IO are defined.		
Eu.IO.50	Info	The diagrams presented in this document are modelled in SysML [SysML].		
Eu.IO.1688	Info	The rules for the interpretation of the model based parts of specification are defined in [Eu.Doc.29].		
Eu.IO.1665	Info	In chapter 3 "Functional requirements specification" the functional system requirements, defined in the form of a SysML model in the PTC Integrity Modeler are depicted as a surrogate of this model in the form of DOORS-objects.		
Eu.IO.1666	Info	A requirement thereby consists of the respective SysML model element, for instance a SysML diagram, and if necessary an additional extension of the requirement.		
Eu.IO.1667	Info	In the column "Requirement Part 1" the particular SysML model element is depicted and in the column "Requirement Part 2" the corresponding extension of the definition is given. The stated object type normally applies both to "Requirement Part 1" and to "Requirement Part 2".		
Eu.IO.1689	Info	There are requirements with type "Req" given, where the column "Requirement Part 2" or a part of it is provided with the heading "Information". In this case, the defined type only applies to the column "Requirement Part 1" and the part of "Requirement Part 2", which is not labelled as "Information".		
Eu.IO.51	Head	2 Conditions of use		
Eu.IO.7628	Req	All references to Eu.Doc.20 refer to version 4.0 (3.A) of that document.		
Eu.IO.7988	Req	All references to Eu.Doc.119 refer to version 1.0 (3.A) of that document.		
Eu.IO.7989	Info	References to Eu.Doc.120 do not refer to a concrete version of that document. The applicable version shall be defined by national specifications. Note: In future phases of the System Pillar, national specifications will be replaced by harmonised specifications.		
Eu.IO.405	Info	The specifications defined in this document shall follow the requirements of the EULYNX System Architecture Specification [Eu.Doc.16].		
Eu.IO.7953	Head	2.1 Functional packages		
Eu.IO.7954	Info	The specifications in this document are divided into functional packages. There are two types of packages related to the product capabilities.		
Eu.IO.7955	Info	'Basic packages': One or more packages, at least one of them must be implemented. It is allowed to combine and implement more than one 'basic package' in a product.		
Eu.IO.7956	Info	'Optional package': One or more packages that can be optionally implemented in addition to one or more basic packages.		
Eu.IO.7957	Info	The specifications of the Subsystem – Generic IO are divided into the following functional packages:		
Eu.IO.7959	Info	Basic Generic IO functionality (basic package) [Basic IO]		
Eu.IO.7958	Info	Flashing IO output (optional package) [Option flashing]		
Eu.IO.406	Head	3 Functional requirements specification		
Eu.IO.407	Head	3.1 Subsystem Generic IO - General Infos and Assumptions		
Eu.IO.1785	Info	Purpose of the Subsystem - Generic IO is to connect one or more elements to the Subsystem - Electronic Interlocking. These elements are identified as Adjacent IO Systems. The commands from Subsystem - Electronic Interlocking are processed and the current statuses are transmitted to the Subsystem - Electronic Interlocking, with the use of binary input and output information. The task of Subsystem - Generic IO is to ensure the controlling and reporting the status of the Adjacent IO Systems by Subsystem - Electronic Interlocking.		Basic IO
Eu.IO.1786	Info	For controlling, incoming commands from Subsystem - Electronic Interlocking are passed to the Adjacent IO System. For reporting, states of the Adjacent IO Systems are passed to the Subsystem - Electronic Interlocking. The commands and statuses are related each to each individual Adjacent IO System.		Basic IO
Eu.IO.1787	Info	For supporting the usual concept of safe transmission via two separated channels, known from relay technology, a "logical" channel can be assigned to two "physical" channels by configuration. In this case, it can be determined, if the second physical channel is supposed to behave Antivalent or Equivalent to the first physical channel. The Subsystem - Electronic Interlocking is sending commands and receiving messages related to the logical channel. If this is assigned to two physical channels (and if Antivalent or Equivalent) is not known to Subsystem - Electronic Interlocking. See EULYNX Domain Knowledge [Eu.Doc.10] for further information.		Basic IO
Eu.IO.7625	Info	The defined model elements represent the Subsystem - Generic IO in a general way. This refers to: - The functional architectures shown in the diagrams. - The defined number of functional entities which represents the connection to the Adjacent IO System. - The defined number of Input Channels and Output Channels in the state diagrams and internal block diagrams. For complete implementation the requirements from chapter "Interfaces to Adjacent IO System" (see Eu.IO.1463) shall be taken into account.		Basic IO
Eu.IO.7285	Head	3.2 Subsystem Generic IO - Logical Viewpoint		
Eu.IO.7978	Head	3.2.1 Subsystem Generic IO - Logical Context		

ID	Type	Requirement Part 1	Requirement Part 2	Func. Pkg.
Eu.IO.447	Info	<p>[Package] Subsystem Generic IO - Logical Context [Logical Viewpoint - Subsystem Definition]</p> <p>bdd [Package] Subsystem Generic IO - Logical Context [Logical Viewpoint - Subsystem Definition]</p> <p>The Subsystem - Generic IO shall be able to control several - depending on the configuration also heterogeneous - Adjacent IO Systems simultaneously. The concrete number of connectable Adjacent IO Systems depends on the number of realised Input Channels and Output Channels at Subsystem - Generic IO and the needed Input Channels and Output Channels per planned Adjacent IO System. However, at least one Adjacent IO System needs to be connected.</p> <p>Examples of Adjacent IO Systems are a key lock, a departure signal or a moveable bridge.</p>	<p>The Subsystem Generic IO shall provide the interfaces shown in the "[Package] Subsystem Generic IO - Logical Context [Logical Viewpoint - Subsystem Definition]". Each interface shall allow the connection to the corresponding actors shown in the quantities defined in the multiplicities.</p>	Basic IO
Eu.IO.455	Head	3.3 Subsystem Generic IO - Functional Viewpoint		
Eu.IO.1279	Head	3.3.1 Definition of time values		
Eu.IO.1697	Info	The generic time values for SCI are specified in Eu.Doc.119.		Basic IO
Eu.IO.7990	Info	The generic time values for SMI are specified in Eu.Doc.120.		Basic IO
Eu.IO.1281	Req	Con_t_Activation_Delay_On	The activation delay period Con_t_Activation_Delay_On shall be configurable for each Output Channel for switching-on, for special applications. Resolution of configuration: in milliseconds. Configurable range: Between 0 and 2047 ms	Basic IO
Eu.IO.8038	Req	Con_t_Activation_Delay_Off	The activation delay period Con_t_Activation_Delay_Off shall be configurable for each Output Channel for switching-off, for special applications. Resolution of configuration: in milliseconds. Configurable range: Between 0 and 2047 ms	Basic IO
Eu.IO.1282	Req	Con_t_Message_Delay_Time_On	The Message delay time Con_t_Message_Delay_Time_On shall be configurable for each Input Channel for report of switching-on, for special applications. The Message delay time is not relevant in case of disturbances or revocation of disturbances. Resolution of configuration: in milliseconds. Configurable range: Between 0 and 2047 ms	Basic IO
Eu.IO.8039	Req	Con_t_Message_Delay_Time_Off	The Message delay time Con_t_Message_Delay_Time_Off shall be configurable for each Input Channel for report of switching-off, for special applications. The Message delay time is not relevant in case of disturbances or revocation of disturbances. Resolution of configuration: in milliseconds. Configurable range: Between 0 and 2047 ms	Basic IO



ID	Type	Requirement Part 1	Requirement Part 2	Func. Pkg.
Eu.IO.1287	Req	Con_tmax_Switching_Period	Con_tmax_Switching_Period is a period, which needs to be configured individually for each Input Channel, which is monitored Antivalent or Equivalent. Within this period, the violation of antivalence or equivalence condition is tolerated. Resolution of configuration: in milliseconds. Configurable range: Between 0 and 255 ms	Basic IO
Eu.IO.7683	Req	Con_Flash_Duty_Cycle	The Con_Flash_Duty_Cycle shall be configurable for each Output Channel. Configurable duty cycles: 1. 75% on, 25% off 2. 50% on, 50% off 3. 25% on, 75% off	Option flashing
Eu.IO.7684	Req	Con_t_Flash_Period	The Con_t_Flash_Period shall be configurable centrally for one Subsystem Generic IO. Configurable periods(frequencies): 1. 2000 ms (0,5 hertz) 2. 1333 ms (0,75 hertz) 3. 1000 ms (1 hertz) 4. 800 ms (1,25 hertz) The configured frequency will be valid for all Flashing channels in one Subsystem Generic IO. Their phases are synchronised to this central frequency.	Option flashing
Eu.IO.1288	Req	Con_t_Debouncing_Time	Con_t_Debouncing_Time needs to be configured and followed individually for each action of both, switching-on and switching-off, of an Input Channel. Resolution of configuration: in milliseconds. Configurable range: Between 0 and 255 ms	Basic IO

Eu.IO.7687	Head	3.3.2 Subsystem Generic IO - Functional Context		
------------	------	--	--	--


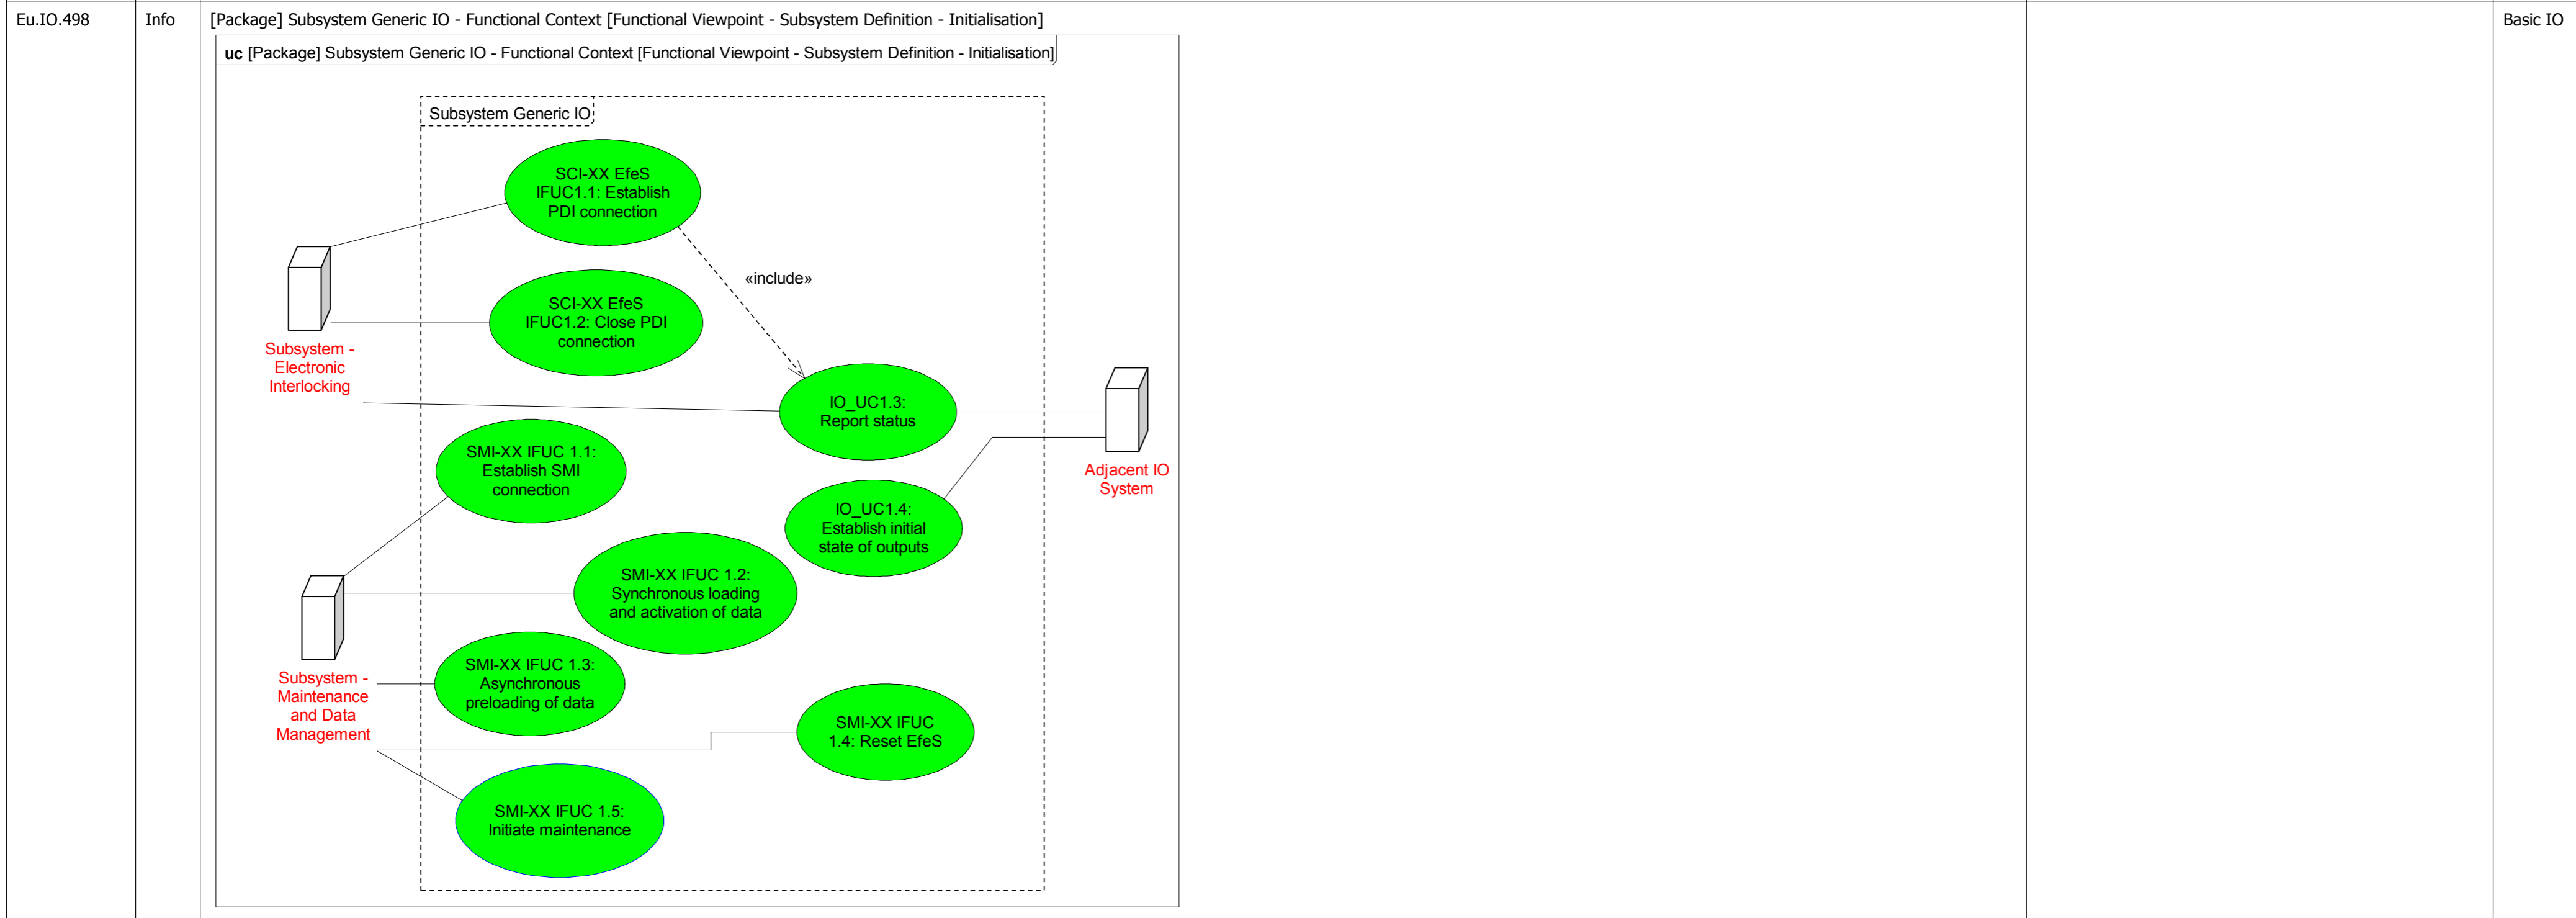


Eu.IO.1699	Info	<p>The generic UseCases SCI-XX EfeS IFUC1.1: Establish PDI connection and SCI-XX EfeS IFUC1.2: Close PDI connection are specified in Eu.Doc.119. The generic UseCases SMI-XX IFUC 1.1: Establish SMI connection, SMI-XX IFUC 1.2: Synchronous loading and activation of data, SMI-XX IFUC 1.3: Asynchronous preloading of data, SMI-XX IFUC 1.4: Reset EfeS and SMI-XX IFUC 1.5: Initiate maintenance are specified in Eu.Doc.120.</p>		
------------	------	--	--	--


ID	Type	Requirement Part 1	Requirement Part 2	Func. Pkg.
Eu.IO.494	Info	IO_UC1.3: Report status	The Subsystem-UseCase "IO_UC1.3: Report status" defines a scenario about the transmission of status data of the Subsystem Generic IO to the Subsystem - Electronic Interlocking, while Process Data Interface protocol connection is establishing.	Basic IO
Eu.IO.495	Info	<p>IO SD 1.3.1</p> <p>IO UC1.3: Report status</p> <p>Main Success Scenario: Report status [IO SD 1.3.1]</p> <p>loop [across all Adjacent IO Systems connected to a Subsystem Generic IO]</p> <p>1. The Subsystem Generic IO detects the current state for each existing channel of the Adjacent IO System considered.</p> <p>par</p> <p>2.a1 The Subsystem Generic IO reports the status information of each logical Input Channel of the Adjacent IO System considered to the Subsystem - Electronic Interlocking. To this end the current state (Switched Off, Switched On or Disturbed) is transmitted for each logical Input Channel. For Antivalent or Equivalent configured RIC the value Disturbed shall be transmitted if the corresponding conditions between the RIC and VIC are violated. Moreover the value Disturbed shall be transmitted if the Subsystem Generic IO detected a technical fault internally for a physical Input Channel.</p> <p>If no Input Channel has been assigned to the affected Adjacent IO System, no message Msg_State_Of_Input_Channels is sent for this Adjacent IO System to the Subsystem - Electronic Interlocking.</p> <p>also par</p> <p>2.b1 The Subsystem Generic IO reports the status information for each logical Output Channel of the Adjacent IO System considered to the Subsystem - Electronic Interlocking. To this end the current state of disturbance (Not Physically Disturbed or Physically Disturbed) is transmitted for each logical Output Channel. If the Output Channel is configured to be monitored, the value Physically Disturbed shall be transmitted if the Subsystem Generic IO detected a technical fault internally for a physical Output Channel. If no Output Channel has been assigned to the affected Adjacent IO System, no message Msg_State_Of_Output_Channels is sent for this Adjacent IO System to the Subsystem - Electronic Interlocking.</p> <p>end par</p> <p>end loop</p>		Basic IO
Eu.IO.496	Info	IO_UC1.4: Establish initial state of outputs	The Subsystem-UseCase "IO_UC1.4: Establish initial state of outputs" defines the main success scenario for establishing the initial state of outputs of the Subsystem Generic IO. While initialising, each physical Output Channel gets Switched Off by Subsystem Generic IO.	Basic IO
Eu.IO.497	Info	<p>IO SD 1.4.1</p> <p>IO UC1.4: Establish initial state of outputs</p> <p>Main Success Scenario: Establish initial state of outputs [IO SD 1.4.1]</p> <p>Precondition: The Subsystem Generic IO is in the state BOOTING or INITIALISING. The Initial State Of Outputs has not been established.</p> <p>Interaction 1.4.1.A:</p> <p>1. - The Subsystem Generic IO detects the readiness for establishing the Initial State Of Outputs.</p> <p>2. The Subsystem Generic IO switches off each physical Output Channel.</p> <p>Postcondition: Each physical Output Channel is Switched Off. Initial State Of Outputs established.</p>		Basic IO

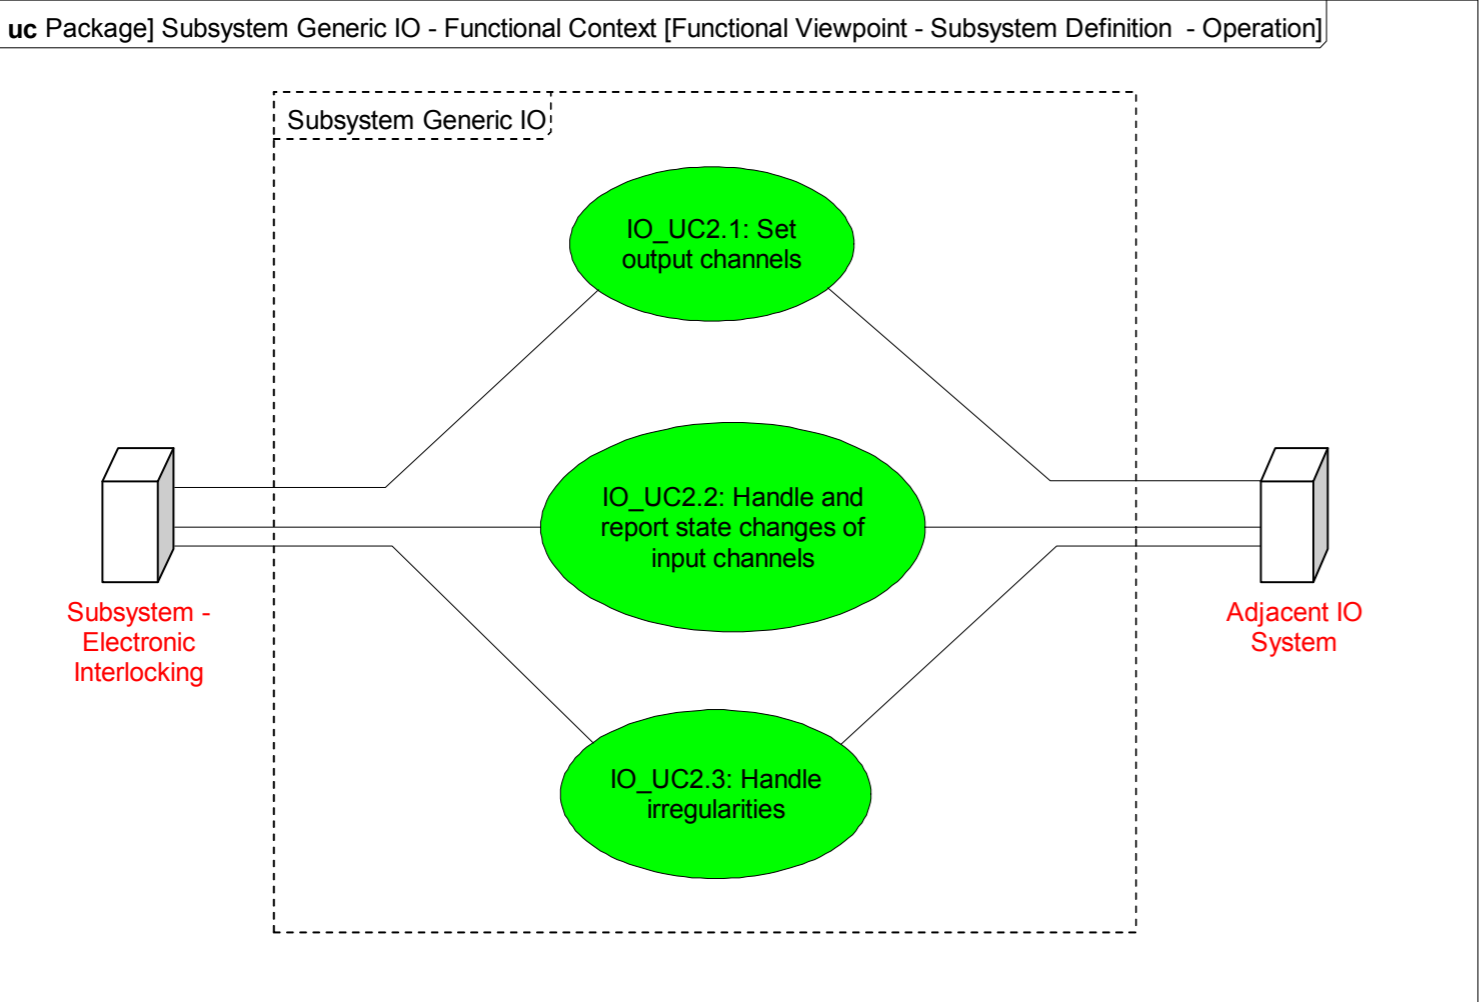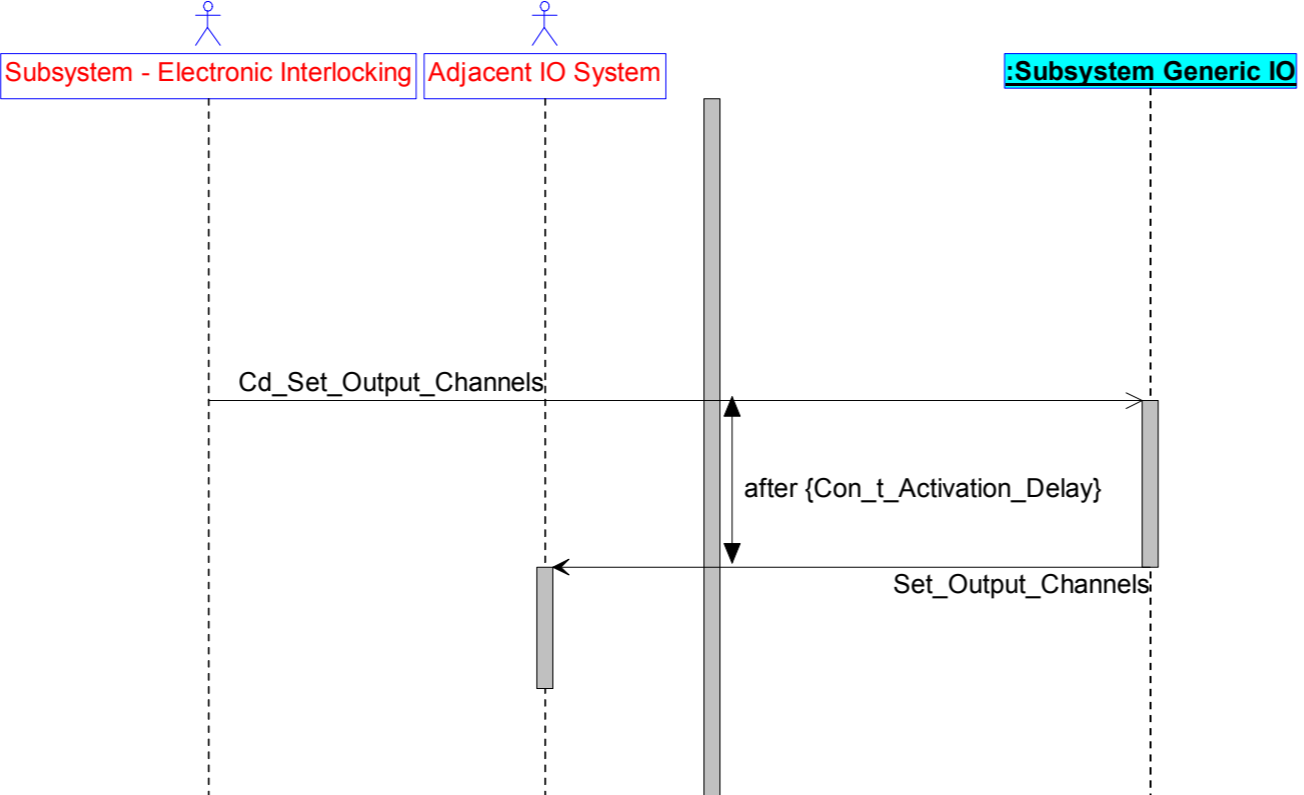ID	Type	Requirement Part 1	Requirement Part 2	Func. Pkg.
Eu.IO.523	Info	<p>Package] Subsystem Generic IO - Functional Context [Functional Viewpoint - Subsystem Definition - Operation]</p> <p>uc Package] Subsystem Generic IO - Functional Context [Functional Viewpoint - Subsystem Definition - Operation]</p> 		Basic IO
Eu.IO.519	Info	IO_UC2.1: Set output channels	The Subsystem-UseCase "IO_UC2.1: Set output channels" defines the process of commanding switching actions by Subsystem - Electronic Interlocking to Output Channels of Subsystem Generic IO.	Basic IO
Eu.IO.520	Info	<p>IO SD 2.1.1</p> <p>IO UC2.1: Set output channels</p> <p>Alternative Scenario: Set dual-channel output channel to switched on or switched off [IO SD 2.1.1]</p> <p>Precondition: The Subsystem Generic IO is in the state OPERATIONAL. The Output Channel of interest for this scenario is configured as Equivalent OR Antivalent.</p> <p>Interaction 2.1.1.A:</p> <ol style="list-style-type: none"> - The Subsystem - Electronic Interlocking transmits the switching command for each logical Output Channel of an Adjacent IO System to the Subsystem Generic IO. At least the Output Channel of interest is affected. The commanded state for the channel of interest is Switched On or Switched Off. The Subsystem Generic IO sets the new target state for each ROC and the corresponding VOC in which the current state differs from the target state after the channel-specific activation delay Con_t_Activation_Delay_On or Con_t_Activation_Delay_Off. <p>Postcondition: The physical Output Channels have been switched in accordance with the commanded logical state.</p> 		Basic IO


ID	Type	Requirement Part 1	Requirement Part 2	Func. Pkg.
Eu.IO.522	Info	<p>IO SD 2.1.2</p> <p>IO UC2.1: Set output channels</p> <p>Alternative Scenario: Set single-channel output channel to switched on or switched off [IO SD 2.1.2]</p> <p>Precondition: The Subsystem Generic IO is in the state OPERATIONAL. The Output Channel of interest for this scenario is configured as single.</p> <p>Interaction 2.1.2.A:</p> <ol style="list-style-type: none"> - The Subsystem - Electronic Interlocking transmits the switching command for each logical Output Channel of an Adjacent IO System to the Subsystem Generic IO. At least the Output Channel of interest is affected. The commanded state for the channel of interest is Switched On or Switched Off. The Subsystem Generic IO sets the new target state for each ROC in which the current state differs from the target state after the channel-specific activation delay Con_t_Activation_Delay_On or Con_t_Activation_Delay_Off. <p>Postcondition: The physical Output Channels have been switched in accordance with the commanded logical state.</p>		Basic IO
Eu.IO.1718	Info	<p>IO SD 2.1.3</p> <p>IO UC2.1: Set output channels</p> <p>Alternative Scenario: Set dual-channel output channel - quick change between switched on and switched off [IO SD 2.1.3]</p> <p>Precondition: The Subsystem Generic IO is in the state OPERATIONAL. The Output Channel of interest for this scenario is configured as Equivalent OR Antivalent.</p> <p>Interaction 2.1.3.A:</p> <ol style="list-style-type: none"> - The Subsystem - Electronic Interlocking transmits the switching command for each logical Output Channel of an Adjacent IO System to the Subsystem Generic IO. At least the Output Channel of interest is affected which is in logical state Switched On or Switched Off. The commanded state for the channel of interest is Switched Off or Switched On (opposite of current state). <p>Interaction 2.1.3.B:</p> <ol style="list-style-type: none"> - The Subsystem - Electronic Interlocking transmits a second switching command for each logical Output Channel of an Adjacent IO System to the Subsystem Generic IO (prior to the expiry of the channel-specific activation delay of the channel of interest (start in step 1)). The commanded state for the channel of interest is Switched On or Switched Off (opposite of what was commanded in step 1). The Subsystem Generic IO sets the new state for each ROC and the corresponding VOC in which the current state differs from the target state after the channel-specific activation delay Con_t_Activation_Delay_On or Con_t_Activation_Delay_Off. No state change for the channel of interest. <p>Postcondition: The physical Output Channels have been switched in accordance with the commanded logical state.</p>		Basic IO

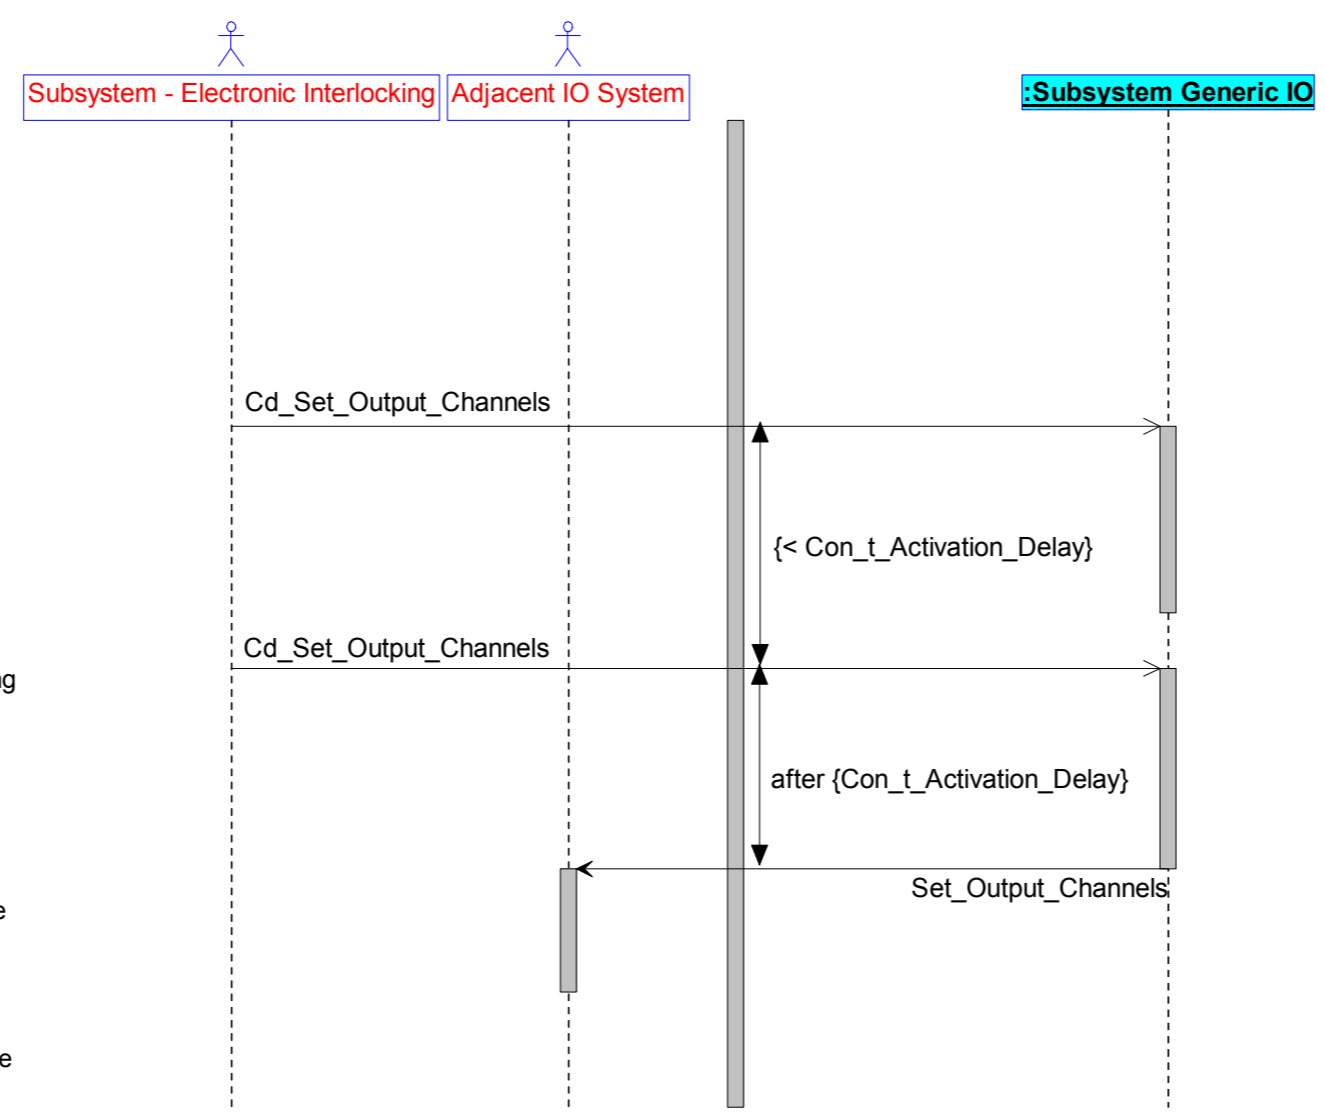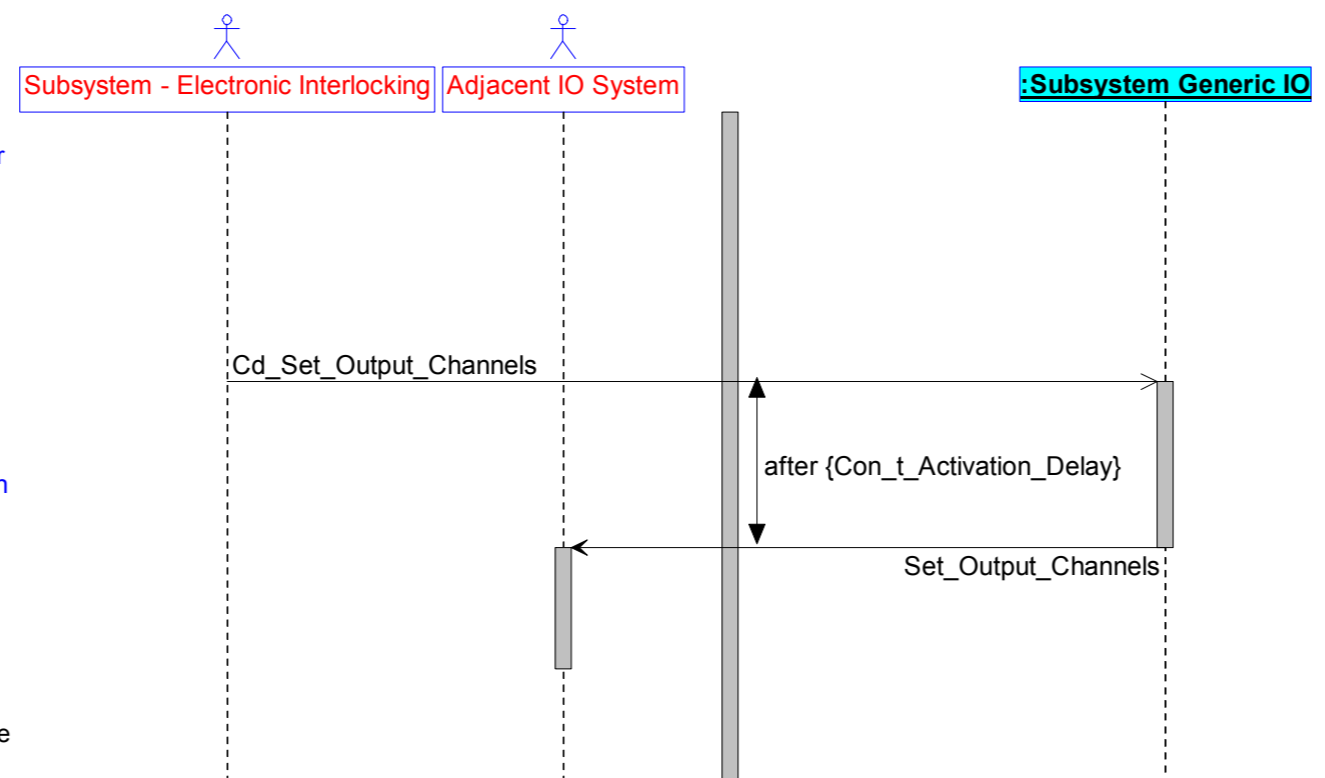


ID	Type	Requirement Part 1	Requirement Part 2	Func. Pkg.
Eu.IO.1730	Info	<p>IO SD 2.1.4</p> <p>IO UC2.1: Set output channels</p> <p>Alternative Scenario: Set single-channel output channel - quick change between switched on and switched off [IO SD 2.1.4]</p> <p>Precondition: The <i>Subsystem Generic IO</i> is in the state <i>OPERATIONAL</i>. The <i>Output Channel</i> of interest for this scenario is configured as single.</p> <p>Interaction 2.1.4.A:</p> <p>1. - The <i>Subsystem - Electronic Interlocking</i> transmits the switching command for each logical <i>Output Channel</i> of an <i>Adjacent IO System</i> to the <i>Subsystem Generic IO</i>. At least the <i>Output Channel</i> of interest is affected which is in logical state <i>Switched On</i> or <i>Switched Off</i>. The commanded state for the channel of interest is <i>Switched Off</i> or <i>Switched On</i> (opposite of current state).</p> <p>Interaction 2.1.4.B:</p> <p>2. - The <i>Subsystem - Electronic Interlocking</i> transmits a second switching command for each logical <i>Output Channel</i> of an <i>Adjacent IO System</i> to the <i>Subsystem Generic IO</i> (prior to the expiry of the channel-specific activation delay of the channel of interest (start in step 1). The commanded state for the channel of interest is <i>Switched On</i> or <i>Switched Off</i> (opposite of what was commanded in step 1).</p> <p>3. The <i>Subsystem Generic IO</i> sets the new state for each <i>ROC</i> in which the current state differs from the target state after the channel-specific activation delay <i>Con_t_Activation_Delay_On</i> or <i>Con_t_Activation_Delay_Off</i>. No state change for the channel of interest.</p> <p>Postcondition: The physical <i>Output Channels</i> have been switched in accordance with the commanded logical state.</p>		Basic IO

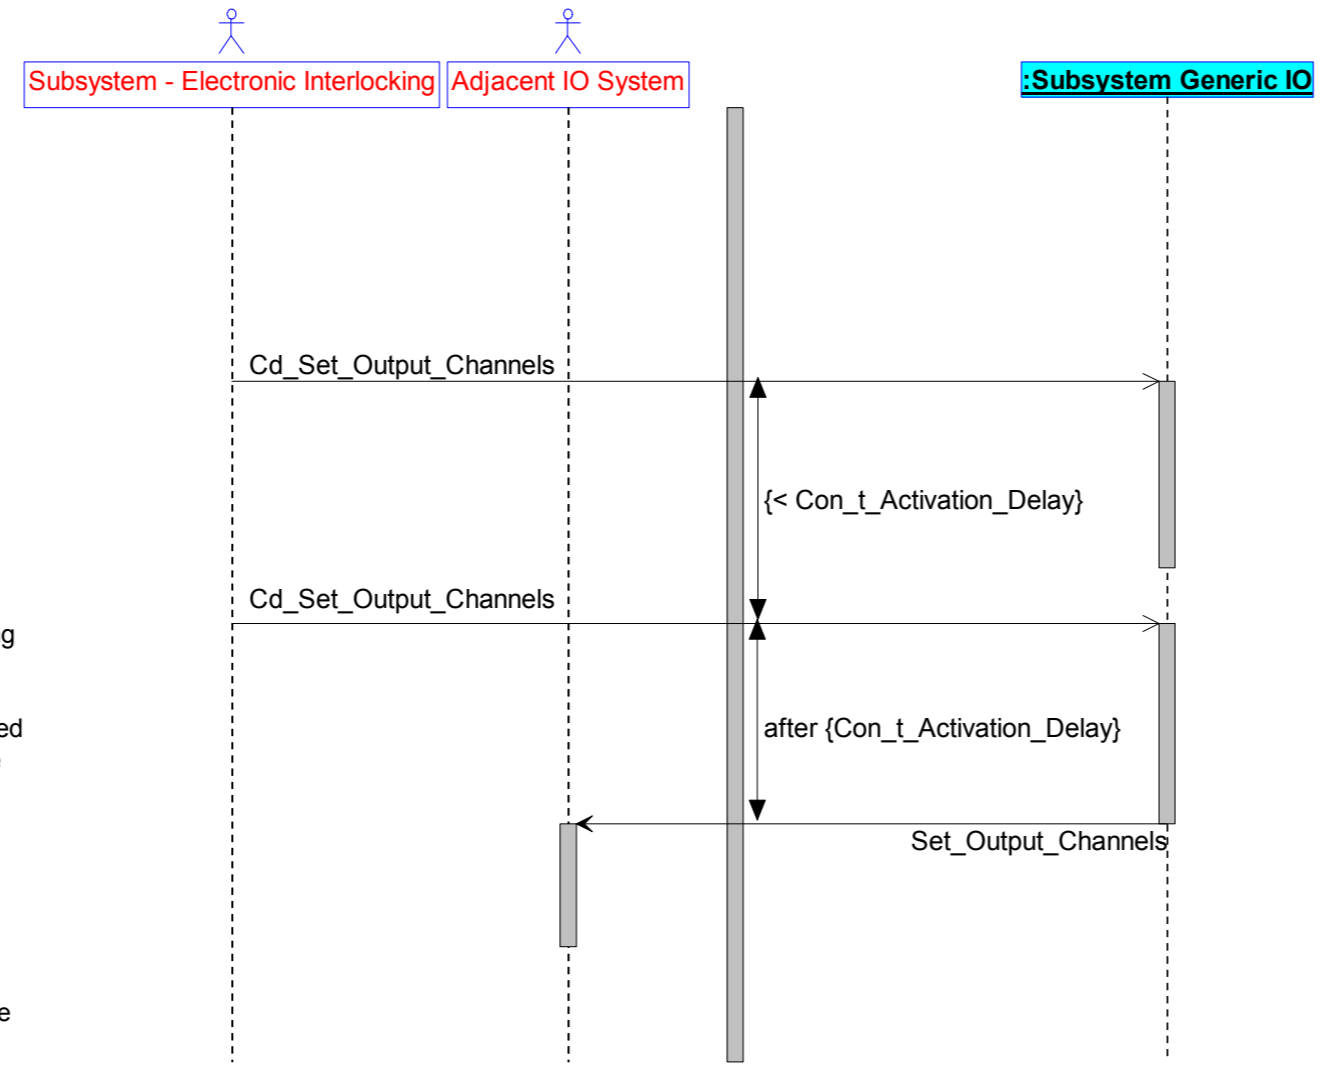

ID	Type	Requirement Part 1	Requirement Part 2	Func. Pkg.
Eu.IO.7688	Info	<p>IO SD 2.1.5</p> <p>IO UC2.1: Set output channels</p> <p>Alternative Scenario: Set dual-channel output channel to flashing [IO SD 2.1.5]</p> <p>Precondition: The Subsystem Generic IO is in the state OPERATIONAL. The Output Channel of interest for this scenario is configured as Equivalent OR Antivalent. The flashing cycles are calculated based on a channel-specific Con_Flash_Duty_Cycle and a Subsystem Generic IO-specific Con_t_Flash_Period.</p> <p>Interaction 2.1.5.A:</p> <p>1. - The Subsystem - Electronic Interlocking transmits the switching command for each logical Output Channel of an Adjacent IO System to the Subsystem Generic IO. At least the Output Channel of interest is affected. The commanded state for the channel of interest is Flashing.</p> <p>alt [Configured Flashing cycle is currently off]</p> <p>2.a1 The Subsystem Generic IO sets the new target state for each ROC and the corresponding VOC in which the current state differs from the target state.</p> <p>loop [Required logical state is Flashing for channel of interest]</p> <p>2.a2 The Flashing cycle changes to on and the Subsystem Generic IO sets the new target state for ROC of interest and the corresponding VOC.</p> <p>2.a3 The Flashing cycle changes to off and the Subsystem Generic IO sets the new target state for ROC of interest and the corresponding VOC.</p> <p>end loop</p> <p>else alt [Configured Flashing cycle is currently on]</p> <p>2.b1 The Subsystem Generic IO sets the new target state for each ROC and the corresponding VOC in which the current state differs from the target state.</p> <p>loop [Required logical state is Flashing for channel of interest]</p> <p>2.b2 The Flashing cycle changes to on and the Subsystem Generic IO sets the new target state for ROC of interest and the corresponding VOC.</p> <p>2.b3 The Flashing cycle changes to off and the Subsystem Generic IO sets the new target state for ROC of interest and the corresponding VOC.</p> <p>end loop</p> <p>end alt</p> <p>Postcondition: The physical Output Channels have been switched in accordance with the commanded logical state. The channel of interest is Flashing between state Switched On and Switched Off with the channel-specific Con_Flash_Duty_Cycle and a Subsystem Generic IO-specific Con_t_Flash_Period.</p>		Option flashing

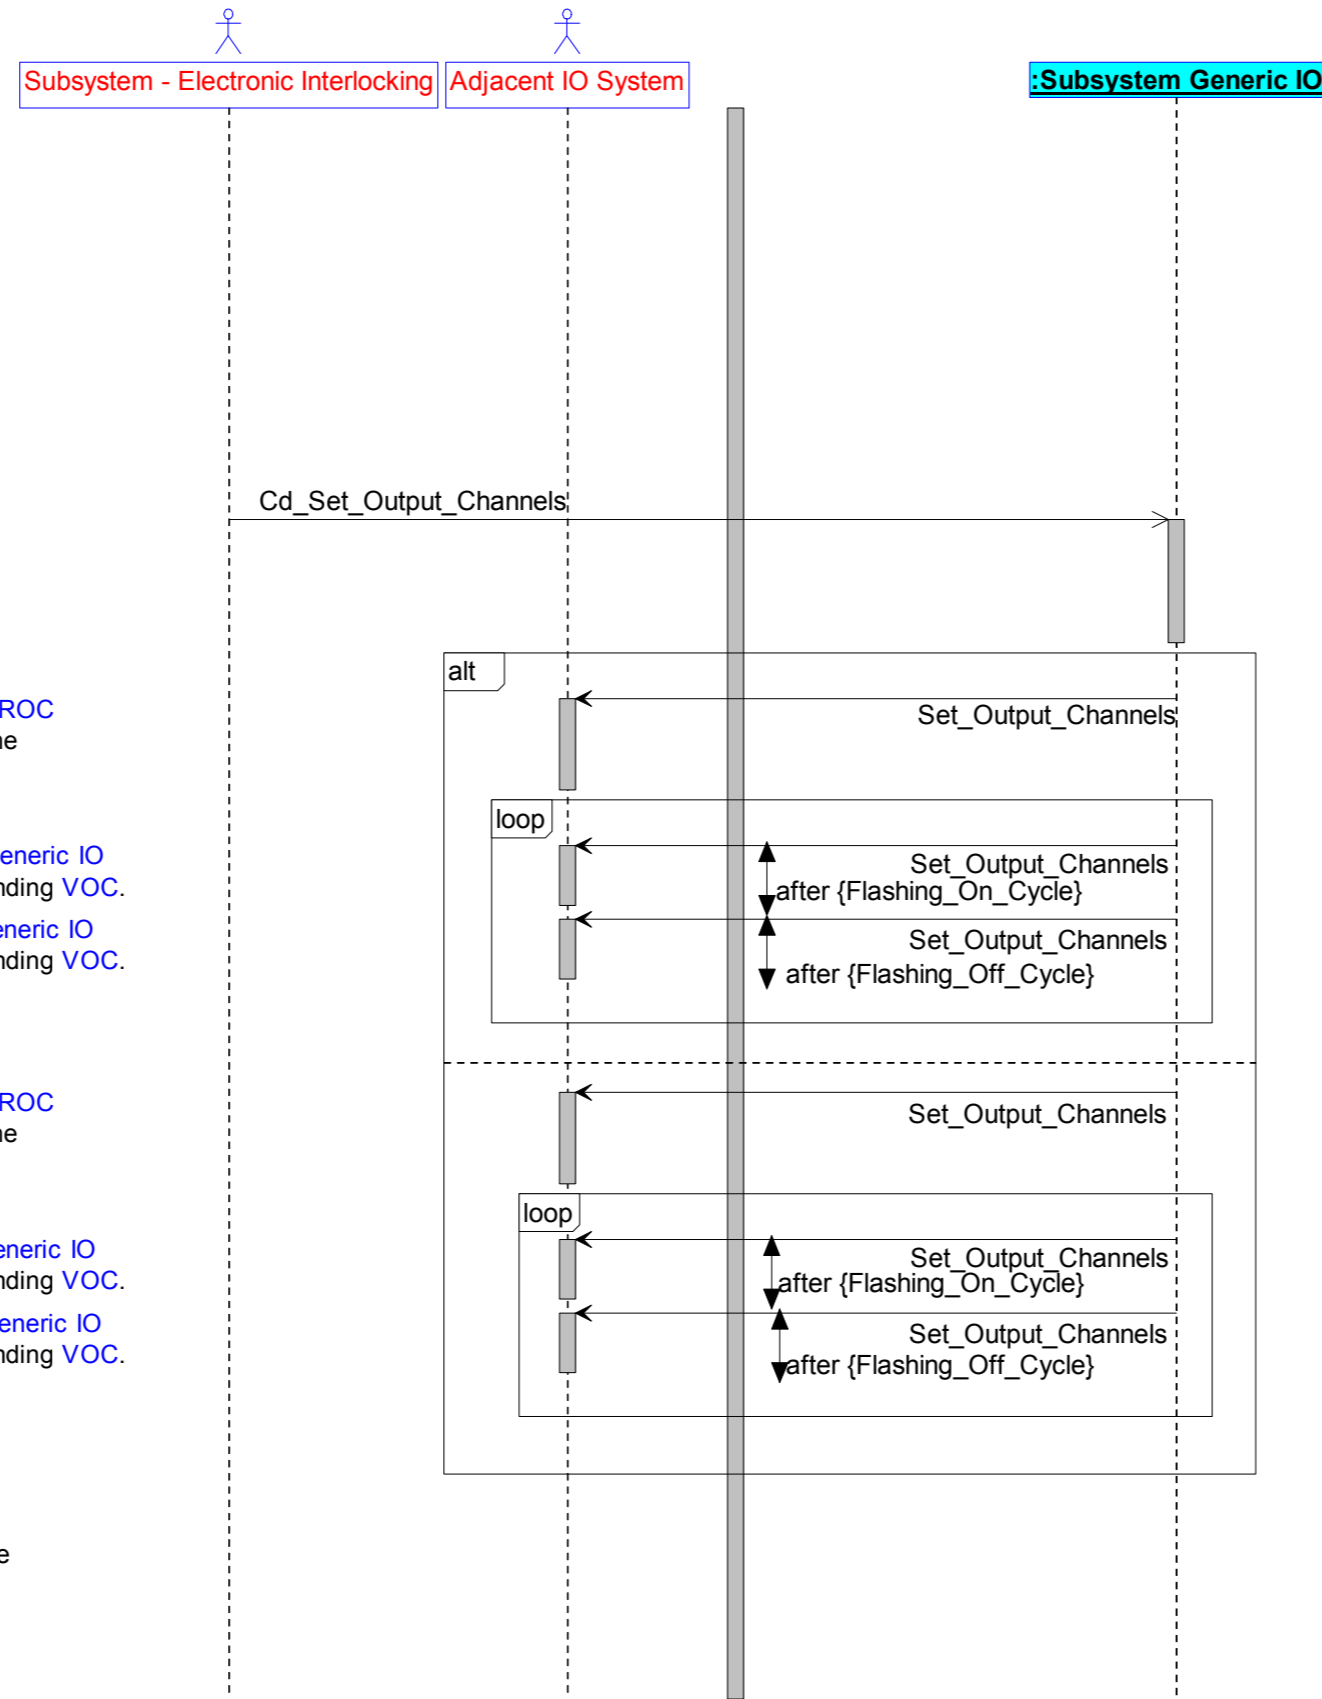



ID	Type	Requirement Part 1	Requirement Part 2	Func. Pkg.
Eu.IO.7689	Info	<p>IO SD 2.1.6</p> <p>IO UC2.1: Set output channels</p> <p>Alternative Scenario: Set single-channel output channel to flashing [IO SD 2.1.6]</p> <p>Precondition: The Subsystem Generic IO is in the state OPERATIONAL. The Output Channel of interest for this scenario is configured as single. The Flashing cycles are calculated based on a channel-specific Con_Flash_Duty_Cycle and a Subsystem Generic IO-specific Con_t_Flash_Period.</p> <p>Interaction 2.1.6.A:</p> <ol style="list-style-type: none"> - The Subsystem - Electronic Interlocking transmits the switching command for each logical Output Channel of an Adjacent IO System to the Subsystem Generic IO. At least the Output Channel of interest is affected. The commanded state for the channel of interest is Flashing. <p>alt [Configured Flashing cycle is currently off]</p> <ol style="list-style-type: none"> a1 The Subsystem Generic IO sets the new target state for each ROC in which the current state differs from the target state. <p>loop [Required logical state is Flashing for channel of interest]</p> <ol style="list-style-type: none"> a2 The Flashing cycle changes to on and the Subsystem Generic IO sets the new target state for ROC of interest. a3 The Flashing cycle changes to off and Subsystem Generic IO sets the new target state for ROC of interest. <p>end loop</p> <p>else alt [Configured Flashing cycle is currently on]</p> <ol style="list-style-type: none"> b1 The Subsystem Generic IO sets the new target state for each ROC in which the current state differs from the target state. <p>loop [Required logical state is Flashing for channel of interest]</p> <ol style="list-style-type: none"> b2 The Flashing cycle changes to on and the Subsystem Generic IO sets the new target state for ROC of interest. b3 The Flashing cycle changes to off and the Subsystem Generic IO sets the new target state for ROC of interest. <p>end loop</p> <p>end alt</p> <p>Postcondition: The physical Output Channels have been switched in accordance with the commanded logical state. The channel of interest is Flashing between state Switched On and Switched Off with the channel-specific Con_Flash_Duty_Cycle and a Subsystem Generic IO-specific Con_t_Flash_Period.</p>		Option flashing
Eu.IO.511	Info	<p>IO_UC2.2: Handle and report state changes of input channels</p>	<p>The Subsystem-UseCase "IO_UC2.2: Handle and report state changes of input channels" describes the process of recognising states at physical Input Channels of Adjacent IO Systems connected to Subsystem Generic IO, as well as the report of those states to Subsystem - Electronic Interlocking.</p> <p>It's distinguished, if an Input Channel is a single-channel or dual-channel (Antivalent or Equivalent).</p> <p>Debouncing is not described here. It's expected, that debouncing time has expired, before the transmission of the depicted message Msg_State_Of_Input_Channels happens.</p>	Basic IO

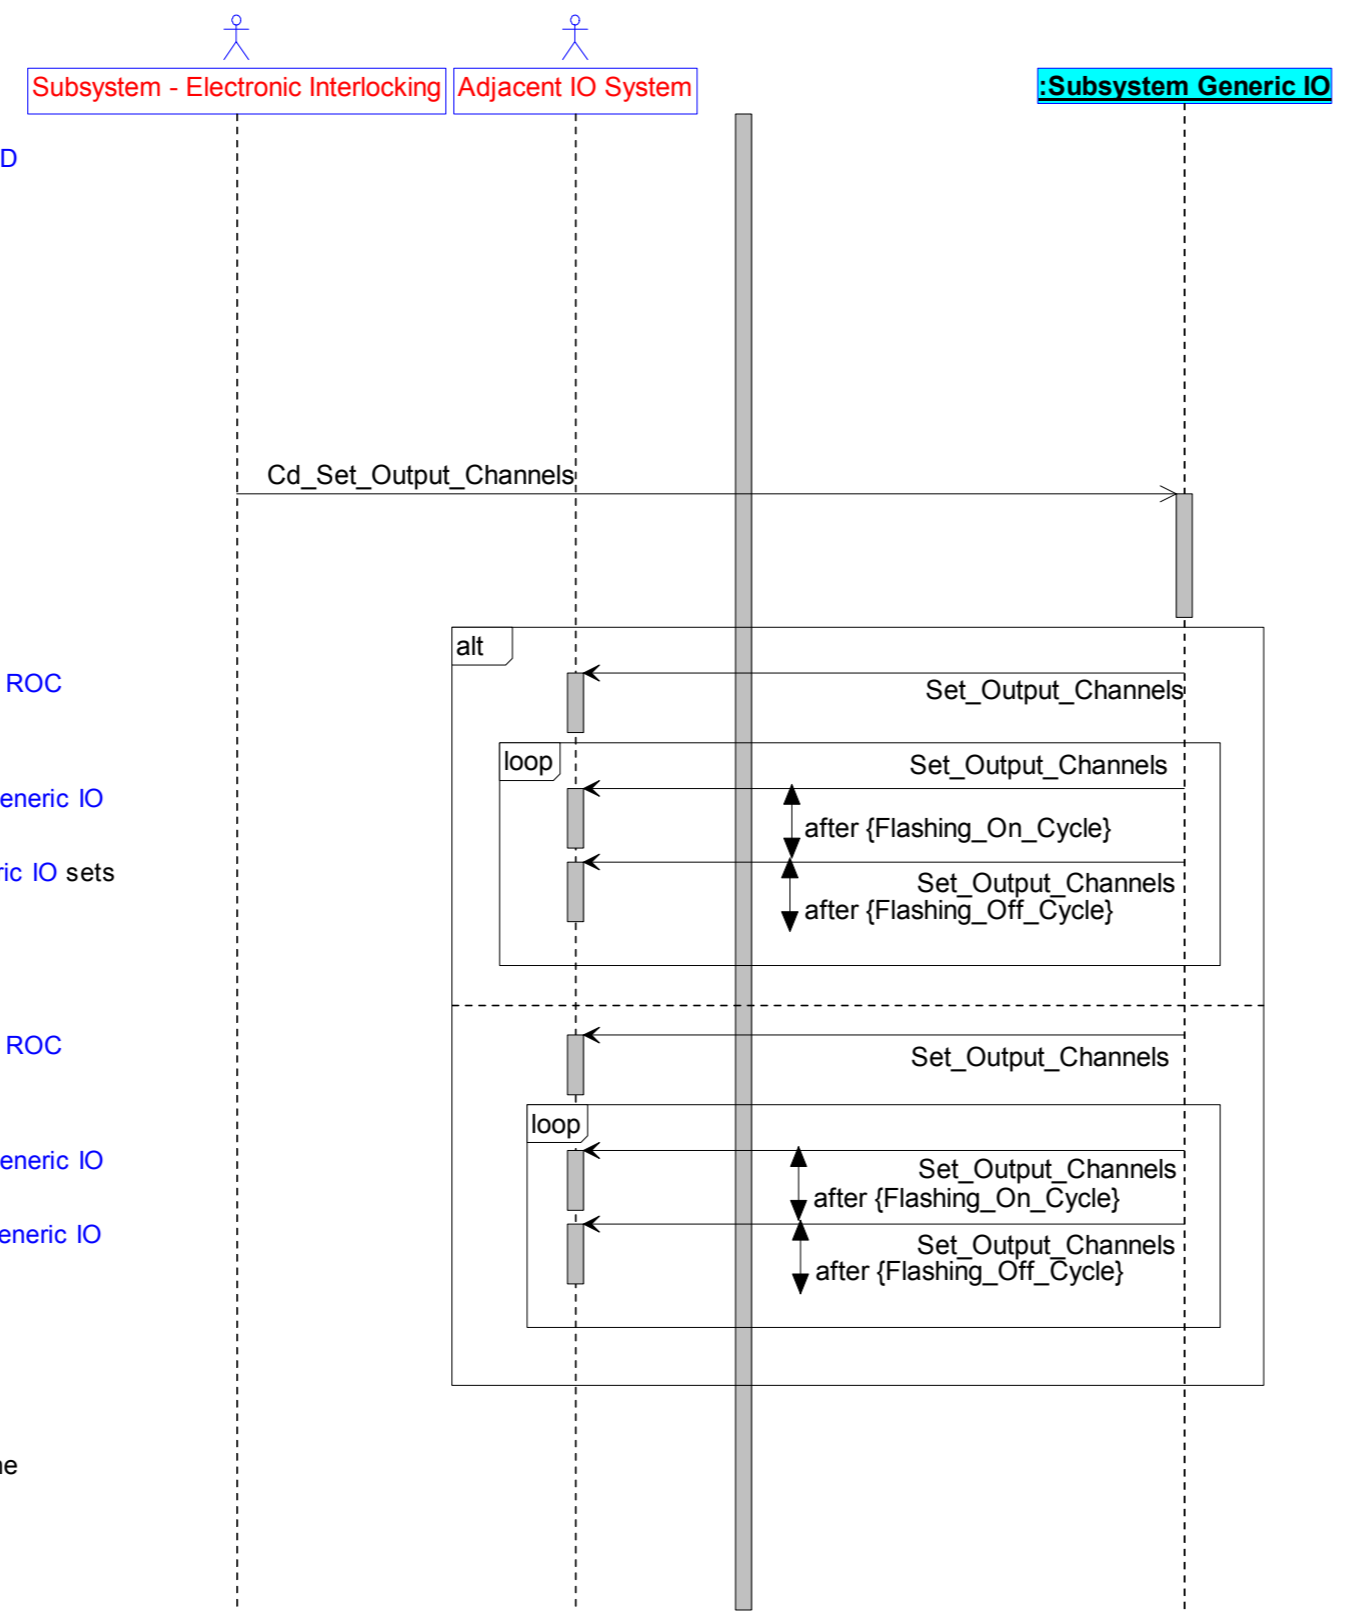

ID	Type	Requirement Part 1	Requirement Part 2	Func. Pkg.
Eu.IO.516	Info	<p>IO SD 2.2.1</p> <p>IO UC2.2: Handle and report state changes of input channels</p> <p>Alternative Scenario: Handle and report state changes of dual-channel input channels [IO SD 2.2.1]</p> <p>Precondition: The <i>Subsystem Generic IO</i> is in the state <i>OPERATIONAL</i>.</p> <p>Interaction 2.2.1.A:</p> <ol style="list-style-type: none"> - In the <i>Adjacent IO System</i> a switching action occurs which is detected by the <i>Subsystem Generic IO</i> at the <i>RIC</i> (configured as dual-channel) and at the <i>VIC</i> as invalid switching state (e.g. <i>RIC Switched On</i> and <i>VIC Switched On</i> for <i>Antivalent</i> channels or <i>RIC Switched On</i> and <i>VIC Switched Off</i> for <i>Equivalent</i> channels). <p>Interaction 2.2.1.B:</p> <ol style="list-style-type: none"> - Prior to the expiry of the permitted switching period <i>Con_tmax_Switching_Period</i> the <i>Subsystem Generic IO</i> detects a valid state at the <i>RIC</i> and at the <i>VIC</i> (e.g. <i>RIC Switched On</i> and <i>VIC Switched Off</i> for <i>Antivalent</i> channels or <i>RIC Switched Off</i> and <i>VIC Switched Off</i> for <i>Equivalent</i> channels). The <i>Subsystem Generic IO</i> waits for the channel-specific message delay time <i>Con_t_Message_Delay_Time_On</i> or <i>Con_t_Message_Delay_Time_Off</i>. The <i>Subsystem Generic IO</i> reports the new status information for each logical <i>Input Channel</i> of the <i>Adjacent IO System</i> to the <i>Subsystem - Electronic Interlocking</i>. The newly detected state (<i>Switched On</i> or <i>Switched Off</i>) is transmitted for the affected logical <i>Input Channel</i>. <i>Note:</i> Given the channel-specific message delay time it is possible that several telegrams are sent for one <i>Adjacent IO System</i>. <p>Postcondition: The state of the logical <i>Input Channels</i> of the affected <i>Adjacent IO System</i> has been reported in accordance with the current state of the physical <i>Input Channels</i>.</p>		Basic IO
Eu.IO.517	Info	<p>IO SD 2.2.2</p> <p>IO UC2.2: Handle and report state changes of input channels</p> <p>Alternative Scenario: Handle and report state changes of single-channel input channels [IO SD 2.2.2]</p> <p>Precondition: The <i>Subsystem Generic IO</i> is in the state <i>OPERATIONAL</i>.</p> <p>Interaction 2.2.2.A:</p> <ol style="list-style-type: none"> - In the <i>Adjacent IO System</i> a switching action occurs which is detected by the <i>Subsystem Generic IO</i> at the <i>RIC</i> (configured as single-channel). The <i>Subsystem Generic IO</i> waits for the channel-specific message delay time <i>Con_t_Message_Delay_Time_On</i> or <i>Con_t_Message_Delay_Time_Off</i>. The <i>Subsystem Generic IO</i> reports the new status information for each logical <i>Input Channel</i> of the <i>Adjacent IO System</i> to the <i>Subsystem - Electronic Interlocking</i>. The newly detected state (<i>Switched On</i> or <i>Switched Off</i>) is transmitted for the affected logical <i>Input Channel</i>. <i>Note:</i> Given the channel-specific message delay time it is possible that several telegrams are sent for one <i>Adjacent IO System</i>. <p>Postcondition: The state of the logical <i>Input Channels</i> of the affected <i>Adjacent IO System</i> has been reported in accordance with the current state of the physical <i>Input Channels</i>.</p>		Basic IO

ID	Type	Requirement Part 1	Requirement Part 2	Func. Pkg.
Eu.IO.513	Info	<p>IO UC2.2: Handle and report state changes of input channels</p> <p>Alternative Scenario: Handle and report incomplete state changes of dual-channel input channels [IO SD 2.2.3]</p> <p>Precondition: The Subsystem Generic IO is in the state OPERATIONAL.</p> <p>Interaction 2.2.3.A:</p> <ol style="list-style-type: none"> - In the Adjacent IO System a switching action occurs which is detected by the Subsystem Generic IO at the RIC (configured as dual-channel) and at the VIC as invalid switching state (e.g. RIC Switched On and VIC Switched On for Antivalent channels or RIC Switched On and VIC Switched Off for Equivalent channels). <p>Interaction 2.2.3.B:</p> <ol style="list-style-type: none"> - Prior to the expiry of the permitted switching period <i>Con_tmax_Switching_Period</i> the Subsystem Generic IO did not detect a valid state at the RIC and at the VIC. The Subsystem Generic IO reports the new status information for each logical Input Channel of the Adjacent IO System to the Subsystem - Electronic Interlocking. The state <i>Disturbed</i> is transmitted for the affected logical Input Channel. <p>Interaction 2.2.3.C:</p> <ol style="list-style-type: none"> - At a later time the Subsystem Generic IO detects a valid state at the RIC and at the VIC (e.g. RIC Switched On and VIC Switched Off for Antivalent channels or RIC and VIC Switched Off for Equivalent channels). - The Subsystem Generic IO reports the new status information for all logical Input Channels of the Adjacent IO System to the Subsystem - Electronic Interlocking without waiting for the message delay time <i>Con_t_Message_Delay_Time_On</i> or <i>Con_t_Message_Delay_Time_Off</i>. The newly detected state (<i>Switched On</i> or <i>Switched Off</i>) is transmitted for the affected logical Input Channel. <p>Postcondition: The state of the logical Input Channels of the affected Adjacent IO System has been reported in accordance with the current state of the physical Input Channels.</p>		Basic IO
Eu.IO.512	Info	<p>IO UC2.2: Handle and report state changes of input channels</p> <p>Alternative Scenario: Handle and report disturbed input channels [IO SD 2.2.4]</p> <p>Precondition: The Subsystem Generic IO is in the state OPERATIONAL.</p> <p>Interaction 2.2.4.A:</p> <ol style="list-style-type: none"> - The Subsystem Generic IO detects that a disturbance in the functionality is present at a physical Input Channel. - The Subsystem Generic IO reports the new states of all logical Input Channels of the Adjacent IO System to the Subsystem - Electronic Interlocking. The value <i>Disturbed</i> is reported for the logical Input Channel belonging to the physical Input Channel considered here. <p>Postcondition: The state of the logical Input Channels of the affected Adjacent IO System has been reported in accordance with the current state of the physical Input Channels.</p>		Basic IO
Eu.IO.515	Info	<p>IO UC2.2: Handle and report state changes of input channels</p> <p>Alternative Scenario: Handle and report revoked disturbances of input channels [IO SD 2.2.5]</p> <p>Precondition: The Subsystem Generic IO is in the state OPERATIONAL.</p> <p>Interaction 2.2.5.A:</p> <ol style="list-style-type: none"> - The Subsystem Generic IO detects that a disturbance has been revoked at a physical Input Channel. - The Subsystem Generic IO reports the new states of all logical Input Channels of the Adjacent IO System to the Subsystem - Electronic Interlocking. The now valid state (<i>Switched On</i>, <i>Switched Off</i>) is reported for the logical Input Channel belonging to the physical Input Channel considered here. <p>Postcondition: The state of the logical Input Channels of the affected Adjacent IO System has been reported in accordance with the current state of the physical Input Channels.</p>		Basic IO


ID	Type	Requirement Part 1	Requirement Part 2	Func. Pkg.
Eu.IO.1758	Info	<p>IO SD 2.2.6</p> <p>IO UC2.2: Handle and report state changes of input channels</p> <p>Alternative Scenario: Handle and report state changes of dual-channel input channels - quick change [IO SD 2.2.6]</p> <p>Precondition: The <i>Subsystem Generic IO</i> is in the state OPERATIONAL.</p> <p>Interaction 2.2.6.A:</p> <p>1. - In the <i>Adjacent IO System</i> a switching action occurs which is detected by the <i>Subsystem Generic IO</i> at the RIC (configured as dual-channel) and at the VIC as invalid switching state (e.g. RIC Switched On and VIC Switched On for Antivalent channels or RIC Switched On and VIC Switched Off for Equivalent channels).</p> <p>Interaction 2.2.6.B:</p> <p>2. - Prior to the expiry of the permitted switching period <i>Con_tmax_Switching_Period</i> the <i>Subsystem Generic IO</i> detects a valid state at the RIC and at the VIC (e.g. RIC Switched On and VIC Switched Off for Antivalent channels or RIC and VIC Switched On for Equivalent channels).</p> <p>Interaction 2.2.6.C:</p> <p>3. - Prior to the expiry of the channel-specific message delay time <i>Con_t_Message_Delay_Time_On</i> or <i>Con_t_Message_Delay_Time_Off</i> in the <i>Adjacent IO System</i> a switching action occurs, which is detected by the <i>Subsystem Generic IO</i> at the RIC and at the VIC as invalid switching state (e.g. RIC Switched Off and VIC Switched Off for Antivalent channels or RIC Switched Off and VIC Switched On for Equivalent channels).</p> <p>Interaction 2.2.6.D:</p> <p>4. - Prior to the expiry of the permitted switching period <i>Con_tmax_Switching_Period</i> the <i>Subsystem Generic IO</i> detects a valid state at the RIC and at the VIC. The RIC and the VIC turned back to the original state before step 1 (e.g. RIC Switched Off and VIC Switched On for Antivalent channels or RIC Switched Off and VIC Switched Off for Equivalent channels).</p> <p>Postcondition: —</p>		Basic IO
Eu.IO.1772	Info	<p>IO SD 2.2.7</p> <p>IO UC2.2: Handle and report state changes of input channels</p> <p>Alternative Scenario: Handle and report state changes of single-channel input channels - quick change [IO SD 2.2.7]</p> <p>Precondition: The <i>Subsystem Generic IO</i> is in the state OPERATIONAL.</p> <p>Interaction 2.2.7.A:</p> <p>1. - In the <i>Adjacent IO System</i> a switching action occurs which is detected by the <i>Subsystem Generic IO</i> at the RIC (configured as single-channel) (e.g. RIC is switching from the state Switched Off to Switched On).</p> <p>Interaction 2.2.7.B:</p> <p>2. - Prior to the expiry of the channel-specific message delay time <i>Con_t_Message_Delay_Time_On</i> or <i>Con_t_Message_Delay_Time_Off</i> the <i>Subsystem Generic IO</i> detects the RIC turned back to the original state (e.g. RIC Switched Off).</p> <p>Postcondition: —</p>		Basic IO

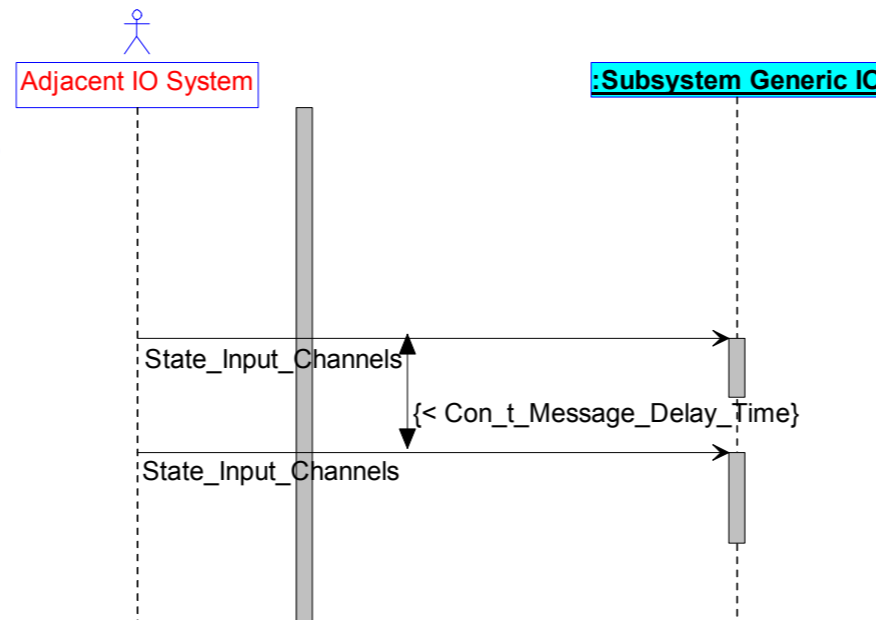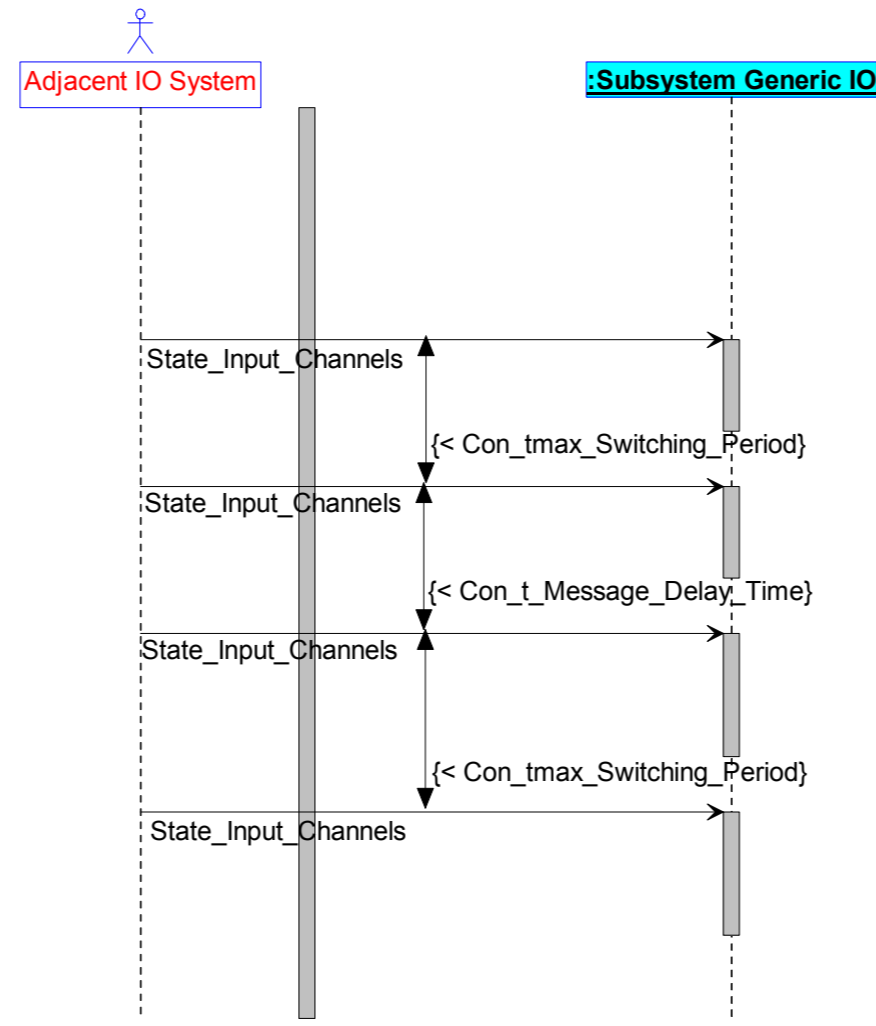

ID	Type	Requirement Part 1	Requirement Part 2	Func. Pkg.
Eu.IO.1741	Info	<p>IO SD 2.2.8</p> <p>IO UC2.2: Handle and report state changes of input channels</p> <p>Alternative Scenario: Handle and report incomplete state changes of dual-channel input channels - quick change [IO SD 2.2.8]</p> <p>Precondition: The <i>Subsystem Generic IO</i> is in the state <i>OPERATIONAL</i>.</p> <p>Interaction 2.2.8.A: 1. - In the <i>Adjacent IO System</i> a switching action occurs which is detected by the <i>Subsystem Generic IO</i> at the <i>RIC</i> (configured as dual-channel) and at the <i>VIC</i> as invalid switching state (e.g. <i>RIC Switched On</i> and <i>VIC Switched On</i> for <i>Antivalent</i> channels or <i>RIC Switched On</i> and <i>VIC Switched Off</i> for <i>Equivalent</i> channels).</p> <p>Interaction 2.2.8.B: 2. - Prior to the expiry of the permitted switching period <i>Con_tmax_Switching_Period</i> the <i>Subsystem Generic IO</i> detects a valid state at the <i>RIC</i> and at the <i>VIC</i> (e.g. <i>RIC Switched On</i> and <i>VIC Switched Off</i> for <i>Antivalent</i> channels or <i>RIC Switched On</i> and <i>VIC Switched On</i> for <i>Equivalent</i> channels).</p> <p>Interaction 2.2.8.C: 3. - Prior to the expiry of the channel-specific message delay time <i>Con_t_Message_Delay_Time</i> in the <i>Adjacent IO System</i> a switching action occurs, which is detected by the <i>Subsystem Generic IO</i> at the <i>RIC</i> and at the <i>VIC</i> as invalid switching state (e.g. <i>RIC Switched Off</i> and <i>VIC Switched Off</i> for <i>Antivalent</i> channels or <i>RIC Switched Off</i> and <i>VIC Switched On</i> for <i>Equivalent</i> channels).</p> <p>Interaction 2.2.8.D: 4. - Prior to the expiry of the permitted switching period <i>Con_tmax_Switching_Period</i> the <i>Subsystem Generic IO</i> did not detect a valid state at the <i>RIC</i> and at the <i>VIC</i>. The <i>Subsystem Generic IO</i> reports the new status information for each logical <i>Input Channel</i> of the <i>Adjacent IO System</i> to the <i>Subsystem - Electronic Interlocking</i>. The state <i>Disturbed</i> is transmitted for the affected logical <i>Input Channel</i>.</p> <p>Interaction 2.2.8.E: 5. - At a later time the <i>Subsystem Generic IO</i> detects a valid state at the <i>RIC</i> and at the <i>VIC</i> (e.g. <i>RIC Switched On</i> and <i>VIC Switched Off</i> for <i>Antivalent</i> channels or <i>RIC Switched Off</i> and <i>VIC Switched Off</i> for <i>Equivalent</i> channels).</p> <p>6. The <i>Subsystem Generic IO</i> reports the new status information for all logical <i>Input Channels</i> of the <i>Adjacent IO System</i> to the <i>Subsystem - Electronic Interlocking</i> without waiting for the message delay time <i>Con_t_Message_Delay_Time</i> or <i>Con_t_Message_Delay_Time_Off</i>. The newly detected state (<i>Switched On</i> or <i>Switched Off</i>) is transmitted for the affected logical <i>Input Channel</i>.</p> <p>Postcondition: The state of the logical <i>Input Channels</i> of the affected <i>Adjacent IO System</i> has been reported in accordance with the current state of the physical <i>Input Channels</i>.</p>		Basic IO
Eu.IO.7672	Info	<p>IO SD 2.2.9</p> <p>IO UC2.2: Handle and report state changes of input channels</p> <p>Alternative Scenario: Handle and report state changes of dual-channel input channels 2 [IO SD 2.2.9]</p> <p>Precondition: The <i>Subsystem Generic IO</i> is in the state <i>OPERATIONAL</i>.</p> <p>Interaction 2.2.9.A: 1. - In the <i>Adjacent IO System</i> a switching action occurs. The <i>Subsystem Generic IO</i> detects a valid state at the <i>RIC</i> (configured as dual-channel) and at the <i>VIC</i> (e.g. <i>RIC Switched On</i> and <i>VIC Switched Off</i> for <i>Antivalent</i> channels or <i>RIC Switched On</i> and <i>VIC Switched On</i> for <i>Equivalent</i> channels) (<i>RIC</i> state and <i>VIC</i> state switched at the same time).</p> <p>2. The <i>Subsystem Generic IO</i> waits for the channel-specific message delay time <i>Con_t_Message_Delay_Time</i> or <i>Con_t_Message_Delay_Time_Off</i>.</p> <p>3. The <i>Subsystem Generic IO</i> reports the new status information for each logical <i>Input Channel</i> of the <i>Adjacent IO System</i> to the <i>Subsystem - Electronic Interlocking</i>. The newly detected state (<i>Switched On</i> or <i>Switched Off</i>) is transmitted for the affected logical <i>Input Channel</i>. <i>Note:</i> Given the channel-specific message delay time it is possible that several telegrams are sent for one <i>Adjacent IO System</i>.</p> <p>Postcondition: The state of the logical <i>Input Channels</i> of the affected <i>Adjacent IO System</i> has been reported in accordance with the current state of the physical <i>Input Channels</i>.</p>		Basic IO

ID	Type	Requirement Part 1	Requirement Part 2	Func. Pkg.
Eu.IO.7671	Info	<p>IO SD 2.2.10</p> <p>IO_UC2.2: Handle and report state changes of input channels</p> <p>Alternative Scenario: Handle and report state changes of dual-channel input channels - quick change 2 [IO SD 2.2.10]</p> <p>Precondition: The <i>Subsystem Generic IO</i> is in the state <i>OPERATIONAL</i>.</p> <p>Interaction 2.2.10.A:</p> <ol style="list-style-type: none"> - In the <i>Adjacent IO System</i> a switching action occurs. The <i>Subsystem Generic IO</i> detects a valid state at the <i>RIC</i> (configured as dual-channel) and at the <i>VIC</i> (e.g. <i>RIC Switched On</i> and <i>VIC Switched Off</i> for <i>Antivalent</i> channels or <i>RIC Switched On</i> and <i>VIC Switched On</i> for <i>Equivalent</i> channels) (<i>RIC</i> state and <i>VIC</i> state switched at the same time). <p>Interaction 2.2.10.B:</p> <ol style="list-style-type: none"> - Prior to the expiry of the channel-specific message delay time <i>Con_t_Message_Delay_Time_On</i> or <i>Con_t_Message_Delay_Time_Off</i>, the <i>Subsystem Generic IO</i> detects a valid state at the <i>RIC</i> and at the <i>VIC</i>. The <i>RIC</i> and the <i>VIC</i> turned back to the original state before step 1 (e.g. <i>RIC Switched Off</i> and <i>VIC Switched On</i> for <i>Antivalent</i> channels or <i>RIC Switched Off</i> and <i>VIC Switched Off</i> for <i>Equivalent</i> channels) (<i>RIC</i> state and <i>VIC</i> state switched at the same time). <p>Postcondition: —</p>		Basic IO
Eu.IO.505	Info	IO_UC2.3: Handle irregularities	The Subsystem-UseCase "IO_UC2.3: Handle irregularities" defines the behaviour of the Subsystem Generic IO when an irregularity occurs.	Basic IO
Eu.IO.506	Info	<p>IO SD 2.3.1</p> <p>IO_UC2.3: Handle irregularities</p> <p>Alternative Scenario: Execution of safety switch-off [IO SD 2.3.1]</p> <p>Precondition: —</p> <p>Interaction 2.3.1.A:</p> <ol style="list-style-type: none"> - The <i>Subsystem Generic IO</i> enters the state <i>FALLBACK_MODE</i>. - The <i>Subsystem Generic IO</i> switches off each physical <i>Output Channel</i>. <p>Postcondition: The Subsystem - Generic IO is in the state <i>FALLBACK_MODE</i>. Each physical <i>Output Channel</i> is <i>Switched Off</i>.</p>		Basic IO
Eu.IO.510	Info	<p>IO SD 2.3.2</p> <p>IO_UC2.3: Handle irregularities</p> <p>Alternative Scenario: Handling of interrupted PDI connection [O SD 2.3.2]</p> <p>Precondition: The <i>Subsystem Generic IO</i> is in the state <i>OPERATIONAL</i>.</p> <p>Interaction 2.3.2.A:</p> <ol style="list-style-type: none"> - The <i>PDI</i> connection has been terminated. - The <i>Subsystem Generic IO</i> switches off each physical <i>Output Channel</i>. <p>Postcondition: The <i>Subsystem Generic IO</i> is in the state <i>INITIALISING</i>. The <i>Process Data Interface protocol</i> connection is terminated. Each physical <i>Output Channel</i> is <i>Switched Off</i>.</p>		Basic IO
Eu.IO.1788	Info	<p>IO SD 2.3.3</p> <p>IO_UC2.3: Handle irregularities</p> <p>Alternative Scenario: Reset occurs [IO SD 2.3.3]</p> <p>Precondition: The <i>Subsystem Generic IO</i> is in the state <i>INITIALISING</i> or <i>OPERATIONAL</i>.</p> <p>Interaction 2.3.3.A:</p> <ol style="list-style-type: none"> - A reset has been occurred. - The <i>Subsystem Generic IO</i> switches off each physical <i>Output Channel</i>. <p>Postcondition: The <i>Subsystem Generic IO</i> is in the state <i>BOOTING</i>. Each physical <i>Output Channel</i> is <i>Switched Off</i>.</p>		Basic IO

ID	Type	Requirement Part 1	Requirement Part 2	Func. Pkg.
Eu.IO.508	Info	<p>IO SD 2.3.4</p> <p>IO UC2.3: Handle irregularities</p> <p>Alternative Scenario: Handle and report a disturbed output channel [IO SD 2.3.4]</p> <p>Precondition: The Subsystem Generic IO is in the state OPERATIONAL. The logical Output Channel is configured to be monitored.</p> <p>Interaction 2.3.4.A:</p> <ol style="list-style-type: none"> - The Subsystem Generic IO detects that a disturbance is present at a physical Output Channel. <p>par</p> <ol style="list-style-type: none"> a1 The Subsystem Generic IO reports the disturbance of the corresponding logical Output Channel to the Subsystem - Electronic Interlocking. <p>also par</p> <ol style="list-style-type: none"> b1 The Subsystem Generic IO shall - as far as possible given the disturbance - either <ul style="list-style-type: none"> - switch off the physical Output Channels of the affected logical Output Channel or - all physical Output Channels of the affected Adjacent IO System (dependent on engineering data, see ID Eu.IO.629). <p>end par</p> <p>Postcondition: The disturbance of the corresponding logical Output Channel has been reported to the Subsystem - Electronic Interlocking. As far as possible either the physical Output Channels of the affected logical Output Channel or all of the physical Output Channels of the affected Adjacent IO System have been Switched Off in accordance with engineering data.</p>		Basic IO
Eu.IO.509	Info	<p>IO SD 2.3.5</p> <p>IO UC2.3: Handle irregularities</p> <p>Alternative Scenario: Handle revocation of a disturbed output channel [IO SD 2.3.5]</p> <p>Precondition: The Subsystem Generic IO is in the state OPERATIONAL. The logical Output Channel is configured to be monitored.</p> <p>Interaction 2.3.5.A:</p> <ol style="list-style-type: none"> - The Subsystem Generic IO detects that a disturbance has been revoked at a physical Output Channel. The Subsystem Generic IO reports, that it is not physically Disturbed anymore at the corresponding logical Output Channel to the Subsystem - Electronic Interlocking. <p>Postcondition: The revocation of the disturbance of the corresponding logical Output Channel has been reported to the Subsystem - Electronic Interlocking.</p>		Basic IO
Eu.IO.1611	Info	<p>IO SD 2.3.6</p> <p>IO UC2.3: Handle irregularities</p> <p>Alternative Scenario: Supply voltage of the subsystem has gone outside the required range for operation [IO SD 2.3.6]</p> <p>Precondition: —</p> <p>Interaction 2.3.6.A:</p> <ol style="list-style-type: none"> - The Subsystem Generic IO enters the state NO_OPERATING_VOLTAGE. The Subsystem Generic IO ensures, that each physical Output Channel is Switched Off. <p>Postcondition: All physical Output Channels of Subsystem Generic IO are Switched Off.</p>		Basic IO

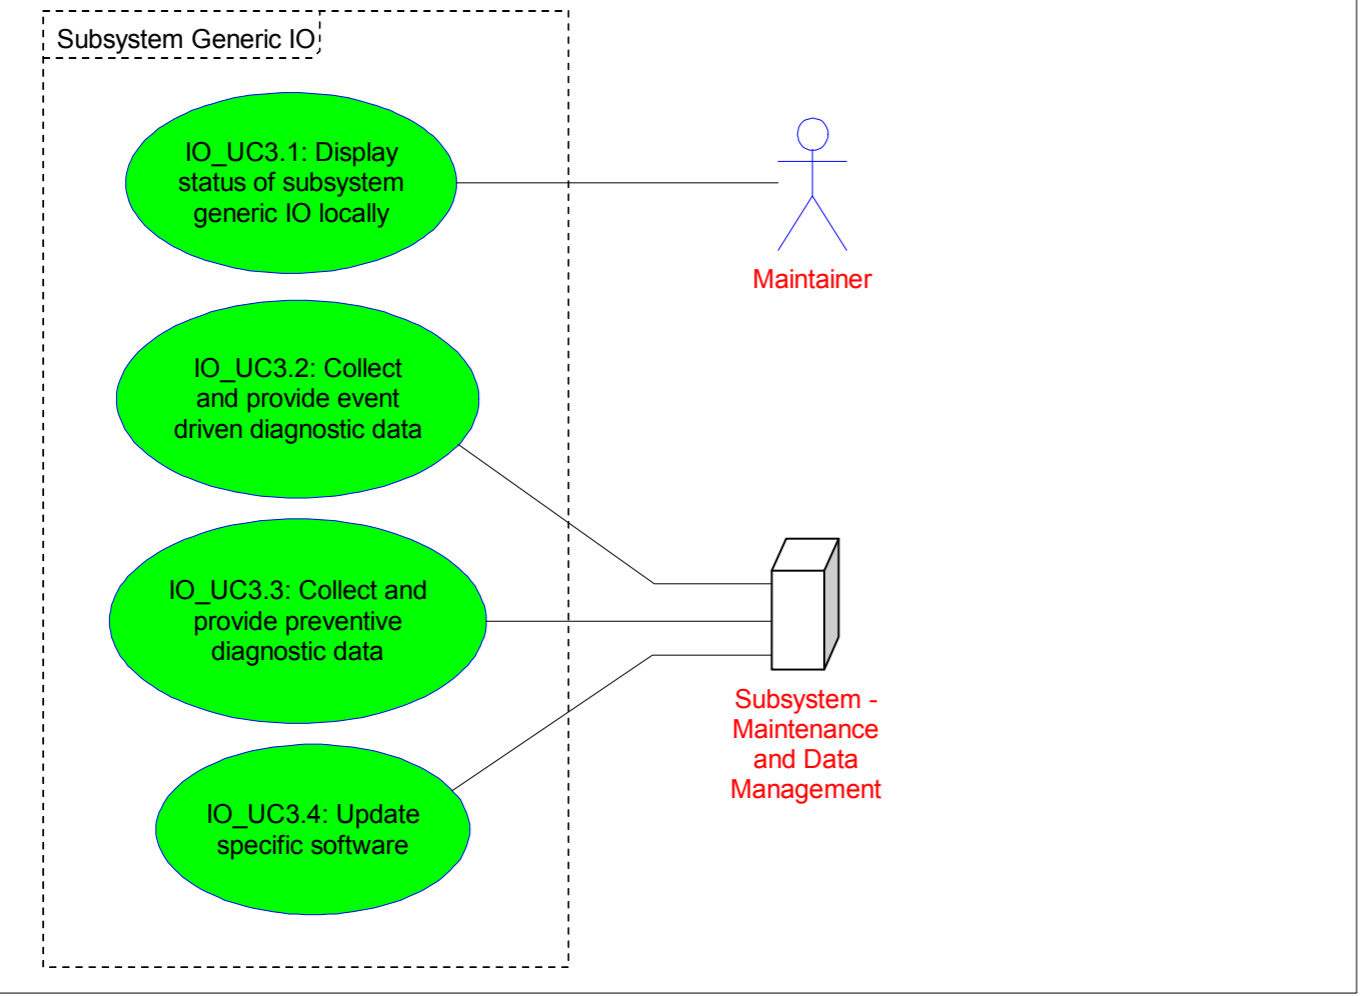ID	Type	Requirement Part 1	Requirement Part 2	Func. Pkg.
Eu.IO.503	Info	<p>[Package] Subsystem Generic IO - Functional Context [Functional Viewpoint - Subsystem Definition - Maintenance]</p> <p>uc [Package] Subsystem Generic IO - Functional Context [Functional Viewpoint - Subsystem Definition - Maintenance]</p> 		Basic IO
Eu.IO.500	Req	IO_UC3.1: Display status of subsystem generic IO locally	<p>Information: The Subsystem-UseCase "IO_UC3.1: Display status of subsystem generic IO locally" defines the local display of the EULYNX field element Subsystem. See ID Eu.IO.416.</p>	Basic IO
Eu.IO.501	Req	IO_UC3.2: Collect and provide event driven diagnostic data	<p>Information: The Subsystem-UseCase "IO_UC3.2: Collect and provide event driven diagnostic data" defines the event driven collection and provision of diagnostic data in case of irregularities. See ID Eu.IO.433.</p>	Basic IO
Eu.IO.502	Req	IO_UC3.3: Collect and provide preventive diagnostic data	<p>Information: The Subsystem-UseCase "IO_UC3.3: Collect and provide preventive diagnostic data" defines the continuous collection and provision of diagnostic data for preventive maintenance. See ID Eu.IO.433.</p>	Basic IO
Eu.IO.1374	Req	IO_UC3.4: Update specific software	<p>Information: The Subsystem-UseCase "IO_UC3.4: Update specific software" defines the process of updating the specific software between Subsystem - Maintenance and Data Management and the Subsystem.</p>	Basic IO
Eu.IO.7972	Head	3.3.3 Subsystem Generic IO - Functional Partitioning		

ID	Type	Requirement Part 1	Requirement Part 2	Func. Pkg.
Eu.IO.7291	Info	<p>[Package] Subsystem Generic IO - Functional Partitioning [Functional Viewpoint - Subsystem Requirements]</p> <p>bdd [Package] Subsystem Generic IO - Functional Partitioning [Functional Viewpoint - Subsystem Requirements]</p>		Basic IO
Eu.IO.7685	Head	3.3.4 Subsystem Generic IO - Functional Architecture		
Eu.IO.437	Info	Subsystem Generic IO	The Subsystem - Generic IO is used for integrating signalling components, particularly in the track and platform area, which are controlled or monitored with input and output information.	Basic IO

ID	Type	Requirement Part 1	Requirement Part 2	Func. Pkg.
Eu.IO.438	Info	IO1	The functional System Data interface to the Basic Data identifier. The InformationFlow through the interface is defined by "Basic_Data_Identifier".	Basic IO
Eu.IO.1268	Info	IO5	The functional Local Control and Display interface to the Maintainer. The InformationFlow through the interface is defined by "Maintainer".	Basic IO
Eu.IO.439	Info	IO2	The functional Control interface for the Output Channels (Reference Output Channel ROC and possibly Validation Output Channel VOC) to the Adjacent IO System. The InformationFlow through the interface is defined by "Adjacent_IO_Systems_O".	Basic IO
Eu.IO.440	Info	IO3	The functional Control interface for the Input Channels (Reference Input Channel RIC and possibly Validation Output Channel VIC) to the Adjacent IO System. The InformationFlow through the interface is defined by "Adjacent_IO_Systems_I".	Basic IO
Eu.IO.7690	Head	3.3.5 Subsystem Generic IO - Functional Entities		
Eu.IO.1698	Info	The abstract essential subsystem states F_EST_EfeS of the Subsystem Generic IO are specified in Eu.Doc.20.		Basic IO
Eu.IO.7737	Info	F_Control_Safe_State_Of_All_Physical_Output_Channel		Basic IO
Eu.IO.7738	Info	<p>[Block] F_Control_Safe_State_Of_All_Physical_Output_Channel [Functional Viewpoint - Subsystem Requirements - Functional Entity]</p> <pre> classDiagram class F_Control_Safe_State_Of_All_Physical_Output_Channel { <<functional entity>> d13out_Switch_Off_Each_Physical_Ouput_Channel : Boolean d9in_Monitored_Output_Channel_Disturbance_State1 : String d9in_Monitored_Output_Channel_Disturbance_StateN : String d51in_EST_EfeS_State : String } class D600in_Con_Disturbance_Switch_Off_All { Boolean } F_Control_Safe_State_Of_All_Physical_Output_Channel --> D600in_Con_Disturbance_Switch_Off_All </pre>		Basic IO
Eu.IO.7740	Info	d51in_EST_EfeS_State	The port d51in_EST_EfeS_State provides information about the state of the generic state machine.	Basic IO
Eu.IO.7741	Info	D600in_Con_Disturbance_Switch_Off_All	The port D600in_Con_Disturbance_Switch_Off_All provides configuration values for the behaviour in case of disturbance depending on engineering data, see ID Eu.IO.629.	Basic IO
Eu.IO.7742	Info	d9in_Monitored_Output_Channel_Disturbance_State1	The port d9in_Monitored_Output_Channel_Disturbance_State1 provides the monitored state of Output Channel 1. The following values are permitted: - Physically Disturbed - Not Physically Disturbed	Basic IO
Eu.IO.7743	Info	d9in_Monitored_Output_Channel_Disturbance_StateN	The port d9in_Monitored_Output_Channel_Disturbance_StateN provides the monitored state of Output Channel N. The following values are permitted: - Physically Disturbed - Not Physically Disturbed	Basic IO
Eu.IO.7739	Info	d13out_Switch_Off_Each_Physical_Ouput_Channel		Basic IO
Eu.IO.7744	Info	F_Control_Safe_State_Of_All_Physical_Output_Channel - Behaviour		Basic IO

ID	Type	Requirement Part 1	Requirement Part 2	Func. Pkg.
Eu.IO.7745	Info	<p>Functional Viewpoint - Subsystem Requirements - Functional Entity STD 0</p> <pre> stm [State Machine] F_Control_Safe_State_Of_All_Physical_Output_Channel - Behaviour [Functional Viewpoint - Subsystem Requirements - Functional Entity STD 0] when(d51in_EST_EfeS_State = "OPERATIONAL") [D600in_Con_Disturbance_Switch_Off_All AND d9in_Monitored_Output_Channel_Disturbance_State1 = "Not_Physically_Disturbed" AND d9in_Monitored_Output_Channel_Disturbance_StateN = "Not_Physically_Disturbed"] / when(d9in_Monitored_Output_Channel_Disturbance_State1 = "Not_Physically_Disturbed" AND d9in_Monitored_Output_Channel_Disturbance_StateN = "Not_Physically_Disturbed") [D600in_Con_Disturbance_Switch_Off_All AND d51in_EST_EfeS_State = "OPERATIONAL"] / when(d51in_EST_EfeS_State = "OPERATIONAL") [NOT D600in_Con_Disturbance_Switch_Off_All] / when(d51in_EST_EfeS_State = "NO_OPERATING_VOLTAGE") / when(d51in_EST_EfeS_State = "BOOTING") / when(d51in_EST_EfeS_State = "FALLBACK_MODE") / when(d51in_EST_EfeS_State = "INITIALISING") / when(d9in_Monitored_Output_Channel_Disturbance_State1 = "Physically_Disturbed") [D600in_Con_Disturbance_Switch_Off_All AND d51in_EST_EfeS_State = "OPERATIONAL"] / when(d9in_Monitored_Output_Channel_Disturbance_StateN = "Physically_Disturbed") [D600in_Con_Disturbance_Switch_Off_All AND d51in_EST_EfeS_State = "OPERATIONAL"] / </pre>		Basic IO
Eu.IO.7746	Info	Initial0		Basic IO
Eu.IO.7747	Req	/{Initial0 - NOT_SWITCHED_OFF_ALL_PHYSICAL_OUTPUT_CHANNEL}		Basic IO
Eu.IO.7748	Info	NOT_SWITCHED_OFF_ALL_PHYSICAL_OUTPUT_CHANNEL		Basic IO
Eu.IO.7749	Req	entry/d13out_Switch_Off_Each_Physical_Ouput_Channel := FALSE; {State-internal in NOT_SWITCHED_OFF_ALL_PHYSICAL_OUTPUT_CHANNEL}		Basic IO
Eu.IO.7753	Req	when(d51in_EST_EfeS_State = "NO_OPERATING_VOLTAGE") / {NOT_SWITCHED_OFF_ALL_PHYSICAL_OUTPUT_CHANNEL - SWITCHED_OFF_ALL_PHYSICAL_OUTPUT_CHANNEL}		Basic IO
Eu.IO.7750	Req	when(d51in_EST_EfeS_State = "BOOTING") / {NOT_SWITCHED_OFF_ALL_PHYSICAL_OUTPUT_CHANNEL - SWITCHED_OFF_ALL_PHYSICAL_OUTPUT_CHANNEL}		Basic IO
Eu.IO.7752	Req	when(d51in_EST_EfeS_State = "INITIALISING") / {NOT_SWITCHED_OFF_ALL_PHYSICAL_OUTPUT_CHANNEL - SWITCHED_OFF_ALL_PHYSICAL_OUTPUT_CHANNEL}		Basic IO
Eu.IO.7751	Req	when(d51in_EST_EfeS_State = "FALLBACK_MODE") / {NOT_SWITCHED_OFF_ALL_PHYSICAL_OUTPUT_CHANNEL - SWITCHED_OFF_ALL_PHYSICAL_OUTPUT_CHANNEL}		Basic IO
Eu.IO.7754	Req	when(d9in_Monitored_Output_Channel_Disturbance_State1 = "Physically_Disturbed") [D600in_Con_Disturbance_Switch_Off_All AND d51in_EST_EfeS_State = "OPERATIONAL"] / {NOT_SWITCHED_OFF_ALL_PHYSICAL_OUTPUT_CHANNEL - SWITCHED_OFF_ALL_PHYSICAL_OUTPUT_CHANNEL}		Basic IO
Eu.IO.7755	Req	when(d9in_Monitored_Output_Channel_Disturbance_StateN = "Physically_Disturbed") [D600in_Con_Disturbance_Switch_Off_All AND d51in_EST_EfeS_State = "OPERATIONAL"] / {NOT_SWITCHED_OFF_ALL_PHYSICAL_OUTPUT_CHANNEL - SWITCHED_OFF_ALL_PHYSICAL_OUTPUT_CHANNEL}		Basic IO
Eu.IO.7756	Info	SWITCHED_OFF_ALL_PHYSICAL_OUTPUT_CHANNEL		Basic IO
Eu.IO.7757	Req	entry/d13out_Switch_Off_Each_Physical_Ouput_Channel := TRUE; {State-internal in SWITCHED_OFF_ALL_PHYSICAL_OUTPUT_CHANNEL}		Basic IO
Eu.IO.7758	Req	when(d51in_EST_EfeS_State = "OPERATIONAL") [D600in_Con_Disturbance_Switch_Off_All AND d9in_Monitored_Output_Channel_Disturbance_State1 = "Not_Physically_Disturbed" AND d9in_Monitored_Output_Channel_Disturbance_StateN = "Not_Physically_Disturbed"] / {SWITCHED_OFF_ALL_PHYSICAL_OUTPUT_CHANNEL - NOT_SWITCHED_OFF_ALL_PHYSICAL_OUTPUT_CHANNEL}		Basic IO
Eu.IO.7759	Req	when(d51in_EST_EfeS_State = "OPERATIONAL") [NOT D600in_Con_Disturbance_Switch_Off_All] / {SWITCHED_OFF_ALL_PHYSICAL_OUTPUT_CHANNEL - NOT_SWITCHED_OFF_ALL_PHYSICAL_OUTPUT_CHANNEL}		Basic IO
Eu.IO.7760	Req	when(d9in_Monitored_Output_Channel_Disturbance_State1 = "Not_Physically_Disturbed" AND d9in_Monitored_Output_Channel_Disturbance_StateN = "Not_Physically_Disturbed") [D600in_Con_Disturbance_Switch_Off_All AND d51in_EST_EfeS_State = "OPERATIONAL"] / {SWITCHED_OFF_ALL_PHYSICAL_OUTPUT_CHANNEL - NOT_SWITCHED_OFF_ALL_PHYSICAL_OUTPUT_CHANNEL}		Basic IO
Eu.IO.7399	Info	F_Control_Output_Channel_State		Basic IO

ID	Type	Requirement Part 1	Requirement Part 2	Func. Pkg.
Eu.IO.7482	Info	<p>[Block] F_Control_Output_Channel_State [Functional Viewpoint - Subsystem Requirements - Functional Entity]</p> <p>ibd [Block] F_Control_Output_Channel_State [Functional Viewpoint - Subsystem Requirements - Functional Entity]</p> <pre> classDiagram class F_Control_Output_Channel_State { <<block>> <<functional entity>> +bc1_Flashing_On_Cycle() +bc2_Flashing_Off_Cycle() -D4in_Con_Channel_Type : String -D5in_Con_t_Activation_Delay_On : Integer -D6in_Con_t_Activation_Delay_Off : Integer -D19in_Con_t_Flash_Period : Integer -D18in_Con_Flash_Duty_Cycle : Integer -d3in_Required_Channel_State : String -d9in_Monitored_Disturbance_State : String -d13in_Switch_Off_Each_Physical_Ouput_Channel : Boolean } </pre>		Basic IO
Eu.IO.7400	Info	//Flashing cycle changing to on	bc1_Flashing_On_Cycle	Option flashing
Eu.IO.7401	Info	//Flashing cycle changing to off	bc2_Flashing_Off_Cycle	Option flashing
Eu.IO.7406	Info	D1out_State_ROC	<p>The port D1out_State_ROC refines the FlowProperty Set_Output_Channels and represents the ROC with the permanent available information at the interface IO2. A state change of D1out_State_ROC is always a try to switch the Adjacent IO System which is connected behind the interface IO2. If D41in_Disturbance_ROC is true the Adjacent IO System do not switched to the permanent available target state from D1out_State_ROC. The following values are permitted:</p> <ul style="list-style-type: none"> - Switched On - Switched Off 	Basic IO
Eu.IO.7407	Info	D2out_State_VOC	<p>The port D2out_State_VOC refines the FlowProperty Set_Output_Channels and represents the VOC with the permanent available information at the interface IO2. A state change of D2out_State_VOC is always a try to switch the Adjacent IO System which is connected behind the interface IO2. If D42in_Disturbance_VOC is true the Adjacent IO System do not switched to the permanent available target state from D2out_State_VOC. The following values are permitted:</p> <ul style="list-style-type: none"> - Switched On - Switched Off 	Basic IO
Eu.IO.7413	Info	d3in_Required_Channel_State		Basic IO
Eu.IO.7409	Info	D4in_Con_Channel_Type	<p>The port D4in_Con_Channel_Type provides configuration values for the implementation of the logical Output Channel. The following values are permitted:</p> <ul style="list-style-type: none"> - Single (assigned to one physical channel) - Antivalent (assigned to two physical channels) - Equivalent (assigned to two physical channels) 	Basic IO
Eu.IO.7411	Info	D5in_Con_t_Activation_Delay_On	<p>The port D5in_Con_t_Activation_Delay_On represents the time value for Con_t_Activation_Delay_On. This is the delay for switching-on the Output Channel.</p>	Basic IO
Eu.IO.7412	Info	D6in_Con_t_Activation_Delay_Off	<p>The port D6in_Con_t_Activation_Delay_Off represents the time value for Con_t_Activation_Delay_Off. This is the delay for switching-off the Output Channel.</p>	Basic IO
Eu.IO.7484	Info	d13in_Switch_Off_Each_Physical_Ouput_Channel		Basic IO
Eu.IO.7694	Info	D19in_Con_t_Flash_Period	<p>The port D19in_Con_t_Flash_Period represents the time value for Con_t_Flash_Period.</p>	Option flashing
Eu.IO.7693	Info	D18in_Con_Flash_Duty_Cycle	<p>The port D18in_Con_Flash_Duty_Cycle represents the value for Con_Flash_Duty_Cycle.</p>	Option flashing

ID	Type	Requirement Part 1	Requirement Part 2	Func. Pkg.
Eu.IO.7695	Info	d9in_Monitored_Disturbance_State	The port d9in_Monitored_Disturbance_State provides the monitored state of one Output Channel. The following values are permitted: - Physically Disturbed - Not Physically Disturbed	Basic IO
Eu.IO.7415	Info	F_Control_Output_Channel_State - Behaviour		Basic IO
Eu.IO.7418	Info	<p>Functional Viewpoint - Subsystem Requirements - Functional Entity STD 1</p> <pre> stm [State Machine] F_Control_Output_Channel_State - Behaviour [Functional Viewpoint - Subsystem Requirements - Functional Entity STD 1] Initial0 SETTING_PHYSICAL_OUTPUT_CHANNEL_STATES CONTROLLING_FLASHING_CYCLE OFF_CYCLE when(d3in_Required_Channel_State = "Flashing")/bc2_Flashing_Off_Cycle(); ON_CYCLE when(d3in_Required_Channel_State = "Flashing")/bc1_Flashing_On_Cycle(); SWITCHING_ROC ROC_SWITCHED_OFF Entry/D1out_State_ROC := "Switched_Off"; ROC_SWITCHED_ON Entry/D1out_State_ROC := "Switched_On"; WAITING_TO_SWITCH_OFF_AFTER_DELAY WAITING_TO_SWITCH_ON_AFTER_DELAY SWITCHING_VOC CHANNEL_CONFIGURATION [D4in_Con_Channel_Type = "SINGLE"]/D2out_State_VOC := "Not_Configured"; VOC_SWITCHED_OFF_EQUIVALENT Entry/D2out_State_VOC := "Switched_Off"; VOC_SWITCHED_ON_EQUIVALENT Entry/D2out_State_VOC := "Switched_On"; WAITING_TO_SWITCH_OFF_AFTER_DELAY_E WAITING_TO_SWITCH_ON_AFTER_DELAY_E VOC_SWITCHED_OFF_ANTIVALENT Entry/D2out_State_VOC := "Switched_Off"; VOC_SWITCHED_ON_ANTIVALENT Entry/D2out_State_VOC := "Switched_On"; WAITING_TO_SWITCH_OFF_AFTER_DELAY_A WAITING_TO_SWITCH_ON_AFTER_DELAY_A </pre>		Basic IO
Eu.IO.7416	Info	Initial0		Basic IO
Eu.IO.7417	Req	/{Initial0 - SETTING_PHYSICAL_OUTPUT_CHANNEL_STATES}		Basic IO
Eu.IO.7419	Info	SETTING_PHYSICAL_OUTPUT_CHANNEL_STATES		Basic IO
Eu.IO.7420	Info	CONTROLLING_FLASHING_CYCLE		Option flashing

ID	Type	Requirement Part 1	Requirement Part 2	Func. Pkg.
Eu.IO.7421	Info	Initial1		Option flashing
Eu.IO.7696	Req	/{Initial1 - OFF_CYCLE}		Option flashing
Eu.IO.7697	Info	OFF_CYCLE		Option flashing
Eu.IO.7698	Req	after(D19in_Con_t_Flash_Period*(1-(D18in_Con_Flash_Duty_Cycle*0.01)))/bc1_Flashing_On_Cycle();{OFF_CYCLE - ON_CYCLE}		Option flashing
Eu.IO.7980	Req	when(d3in_Required_Channel_State = "Flashing")/bc2_Flashing_Off_Cycle();{State-internal in OFF_CYCLE}		Option flashing
Eu.IO.7699	Info	ON_CYCLE		Option flashing
Eu.IO.7700	Req	after(D19in_Con_t_Flash_Period*(D18in_Con_Flash_Duty_Cycle*0.01))/bc2_Flashing_Off_Cycle();{ON_CYCLE - OFF_CYCLE}		Option flashing
Eu.IO.7981	Req	when(d3in_Required_Channel_State = "Flashing")/bc1_Flashing_On_Cycle();{State-internal in ON_CYCLE}		Option flashing
Eu.IO.7449	Info	SWITCHING_ROC		Basic IO
Eu.IO.7450	Info	Initial2		Basic IO
Eu.IO.7451	Req	/{Initial2 - ROC_SWITCHED_OFF}		Basic IO
Eu.IO.7452	Info	ROC_SWITCHED_OFF		Basic IO
Eu.IO.7454	Req	entry/D1out_State_ROC := "Switched_Off";{State-internal in ROC_SWITCHED_OFF}		Basic IO
Eu.IO.7453	Req	when(d3in_Required_Channel_State = "Switched_On") [NOT d13in_Switch_Off_Each_Physical_Ouput_Channel AND d9in_Monitored_Disturbance_State = "Not_Physically_Disturbed"] / {ROC_SWITCHED_OFF - WAITING_TO_SWITCH_ON_AFTER_DELAY}		Basic IO
Eu.IO.7701	Req	bc1_Flashing_On_Cycle [d3in_Required_Channel_State = "Flashing" AND NOT d13in_Switch_Off_Each_Physical_Ouput_Channel AND d9in_Monitored_Disturbance_State = "Not_Physically_Disturbed"] / {ROC_SWITCHED_OFF - ROC_SWITCHED_ON}		Option flashing
Eu.IO.7707	Info	WAITING_TO_SWITCH_ON_AFTER_DELAY		Basic IO
Eu.IO.7708	Req	after(D5in_Con_t_Activation_Delay_On) / {WAITING_TO_SWITCH_ON_AFTER_DELAY - ROC_SWITCHED_ON}		Basic IO
Eu.IO.7709	Req	when(d13in_Switch_Off_Each_Physical_Ouput_Channel OR d9in_Monitored_Disturbance_State = "Physically_Disturbed") / {WAITING_TO_SWITCH_ON_AFTER_DELAY - ROC_SWITCHED_OFF}		Basic IO
Eu.IO.7710	Req	when(d3in_Required_Channel_State = "Switched_Off") / {WAITING_TO_SWITCH_ON_AFTER_DELAY - ROC_SWITCHED_OFF}		Basic IO
Eu.IO.7455	Info	ROC_SWITCHED_ON		Basic IO
Eu.IO.7458	Req	entry/D1out_State_ROC := "Switched_On";{State-internal in ROC_SWITCHED_ON}		Basic IO
Eu.IO.7456	Req	when(d3in_Required_Channel_State = "Switched_Off") / {ROC_SWITCHED_ON - WAITING_TO_SWITCH_OFF_AFTER_DELAY}		Basic IO
Eu.IO.7457	Req	when(d13in_Switch_Off_Each_Physical_Ouput_Channel OR d9in_Monitored_Disturbance_State = "Physically_Disturbed") / {ROC_SWITCHED_ON - ROC_SWITCHED_OFF}		Basic IO
Eu.IO.7702	Req	bc2_Flashing_Off_Cycle [d3in_Required_Channel_State = "Flashing"] / {ROC_SWITCHED_ON - ROC_SWITCHED_OFF}		Option flashing
Eu.IO.7703	Info	WAITING_TO_SWITCH_OFF_AFTER_DELAY		Basic IO
Eu.IO.7704	Req	after(D6in_Con_t_Activation_Delay_Off) / {WAITING_TO_SWITCH_OFF_AFTER_DELAY - ROC_SWITCHED_OFF}		Basic IO
Eu.IO.7705	Req	when(d13in_Switch_Off_Each_Physical_Ouput_Channel OR d9in_Monitored_Disturbance_State = "Physically_Disturbed") / {WAITING_TO_SWITCH_OFF_AFTER_DELAY - ROC_SWITCHED_OFF}		Basic IO
Eu.IO.7706	Req	when(d3in_Required_Channel_State = "Switched_On") / {WAITING_TO_SWITCH_OFF_AFTER_DELAY - ROC_SWITCHED_ON}		Basic IO
Eu.IO.7461	Info	SWITCHING_VOC		Basic IO
Eu.IO.7462	Info	Initial3		Basic IO
Eu.IO.7463	Req	/{Initial3 - CHANNEL_CONFIGURATION}		Basic IO
Eu.IO.7474	Info	CHANNEL_CONFIGURATION		Basic IO
Eu.IO.7475	Req	[D4in_Con_Channel_Type = "SINGLE"] / D2out_State_VOC := "Not_Configured";{CHANNEL_CONFIGURATION - VOC_NOT_CONFIGURED}		Basic IO
Eu.IO.7476	Req	[D4in_Con_Channel_Type = "EQUIVALENT"] / {CHANNEL_CONFIGURATION - VOC_SWITCHED_OFF_EQUIVALENT}		Basic IO
Eu.IO.7711	Req	[D4in_Con_Channel_Type = "ANTIVALENT"] / {CHANNEL_CONFIGURATION - VOC_SWITCHED_OFF_ANTIVALENT}		Basic IO
Eu.IO.7464	Info	VOC_NOT_CONFIGURED		Basic IO
Eu.IO.7465	Info	VOC_SWITCHED_OFF_EQUIVALENT		Basic IO
Eu.IO.7468	Req	entry/D2out_State_VOC := "Switched_Off";{State-internal in VOC_SWITCHED_OFF_EQUIVALENT}		Basic IO
Eu.IO.7466	Req	when(d3in_Required_Channel_State = "Switched_On") [NOT d13in_Switch_Off_Each_Physical_Ouput_Channel AND d9in_Monitored_Disturbance_State = "Not_Physically_Disturbed"] / {VOC_SWITCHED_OFF_EQUIVALENT - WAITING_TO_SWITCH_ON_AFTER_DELAY_E}		Basic IO
Eu.IO.7715	Req	bc1_Flashing_On_Cycle [d3in_Required_Channel_State = "Flashing" AND NOT d13in_Switch_Off_Each_Physical_Ouput_Channel AND d9in_Monitored_Disturbance_State = "Not_Physically_Disturbed"] / {VOC_SWITCHED_OFF_EQUIVALENT - VOC_SWITCHED_ON_EQUIVALENT}		Option flashing

ID	Type	Requirement Part 1	Requirement Part 2	Func. Pkg.
Eu.IO.7733	Info	WAITING_TO_SWITCH_ON_AFTER_DELAY_E		Basic IO
Eu.IO.7734	Req	after(D5in_Con_t_Activation_Delay_On)/{WAITING_TO_SWITCH_ON_AFTER_DELAY_E - VOC_SWITCHED_ON_EQUIVALENT}		Basic IO
Eu.IO.7735	Req	when(d13in_Switch_Off_Each_Physical_Ouput_Channel OR d9in_Monitored_Disturbance_State = "Physically_Disturbed")/{WAITING_TO_SWITCH_ON_AFTER_DELAY_E - VOC_SWITCHED_OFF_EQUIVALENT}		Basic IO
Eu.IO.7736	Req	when(d3in_Required_Channel_State = "Switched_Off")/{WAITING_TO_SWITCH_ON_AFTER_DELAY_E - VOC_SWITCHED_OFF_EQUIVALENT}		Basic IO
Eu.IO.7469	Info	VOC_SWITCHED_ON_EQUIVALENT		Basic IO
Eu.IO.7473	Req	entry/D2out_State_VOC := "Switched_On";{State-internal in VOC_SWITCHED_ON_EQUIVALENT}		Basic IO
Eu.IO.7471	Req	when(d3in_Required_Channel_State = "Switched_Off")/{VOC_SWITCHED_ON_EQUIVALENT - WAITING_TO_SWITCH_OFF_AFTER_DELAY_E}		Basic IO
Eu.IO.7472	Req	when(d13in_Switch_Off_Each_Physical_Ouput_Channel OR d9in_Monitored_Disturbance_State = "Physically_Disturbed")/{VOC_SWITCHED_ON_EQUIVALENT - VOC_SWITCHED_OFF_EQUIVALENT}		Basic IO
Eu.IO.7720	Req	bc2_Flashing_Off_Cycle[d3in_Required_Channel_State = "Flashing"]/{VOC_SWITCHED_ON_EQUIVALENT - VOC_SWITCHED_OFF_EQUIVALENT}		Option flashing
Eu.IO.7725	Info	WAITING_TO_SWITCH_OFF_AFTER_DELAY_E		Basic IO
Eu.IO.7726	Req	after(D6in_Con_t_Activation_Delay_Off)/{WAITING_TO_SWITCH_OFF_AFTER_DELAY_E - VOC_SWITCHED_OFF_EQUIVALENT}		Basic IO
Eu.IO.7727	Req	when(d13in_Switch_Off_Each_Physical_Ouput_Channel OR d9in_Monitored_Disturbance_State = "Physically_Disturbed")/{WAITING_TO_SWITCH_OFF_AFTER_DELAY_E - VOC_SWITCHED_OFF_EQUIVALENT}		Basic IO
Eu.IO.7728	Req	when(d3in_Required_Channel_State = "Switched_On")/{WAITING_TO_SWITCH_OFF_AFTER_DELAY_E - VOC_SWITCHED_ON_EQUIVALENT}		Basic IO
Eu.IO.7712	Info	VOC_SWITCHED_OFF_ANTIVALENT		Basic IO
Eu.IO.7713	Req	bc2_Flashing_Off_Cycle[d3in_Required_Channel_State = "Flashing" AND NOT d13in_Switch_Off_Each_Physical_Ouput_Channel AND d9in_Monitored_Disturbance_State = "Not_Physically_Disturbed"]/{VOC_SWITCHED_OFF_ANTIVALENT - VOC_SWITCHED_ON_ANTIVALENT}		Option flashing
Eu.IO.7714	Req	entry/D2out_State_VOC := "Switched_Off";{State-internal in VOC_SWITCHED_OFF_ANTIVALENT}		Basic IO
Eu.IO.7467	Req	when(d3in_Required_Channel_State = "Switched_Off") [NOT d13in_Switch_Off_Each_Physical_Ouput_Channel AND d9in_Monitored_Disturbance_State = "Not_Physically_Disturbed"] / {VOC_SWITCHED_OFF_ANTIVALENT - WAITING_TO_SWITCH_OFF_AFTER_DELAY_A}		Basic IO
Eu.IO.7716	Info	VOC_SWITCHED_ON_ANTIVALENT		Basic IO
Eu.IO.7717	Req	bc1_Flashing_On_Cycle[d3in_Required_Channel_State = "Flashing"]/{VOC_SWITCHED_ON_ANTIVALENT - VOC_SWITCHED_OFF_ANTIVALENT}		Option flashing
Eu.IO.7718	Req	entry/D2out_State_VOC := "Switched_On";{State-internal in VOC_SWITCHED_ON_ANTIVALENT}		Basic IO
Eu.IO.7719	Req	when(d13in_Switch_Off_Each_Physical_Ouput_Channel OR d9in_Monitored_Disturbance_State = "Physically_Disturbed")/{VOC_SWITCHED_ON_ANTIVALENT - VOC_SWITCHED_OFF_ANTIVALENT}		Basic IO
Eu.IO.7470	Req	when(d3in_Required_Channel_State = "Switched_On")/{VOC_SWITCHED_ON_ANTIVALENT - WAITING_TO_SWITCH_ON_AFTER_DELAY_A}		Basic IO
Eu.IO.7721	Info	WAITING_TO_SWITCH_ON_AFTER_DELAY_A		Basic IO
Eu.IO.7722	Req	after(D5in_Con_t_Activation_Delay_On)/{WAITING_TO_SWITCH_ON_AFTER_DELAY_A - VOC_SWITCHED_OFF_ANTIVALENT}		Basic IO
Eu.IO.7723	Req	when(d13in_Switch_Off_Each_Physical_Ouput_Channel OR d9in_Monitored_Disturbance_State = "Physically_Disturbed")/{WAITING_TO_SWITCH_ON_AFTER_DELAY_A - VOC_SWITCHED_OFF_ANTIVALENT}		Basic IO
Eu.IO.7724	Req	when(d3in_Required_Channel_State = "Switched_Off")/{WAITING_TO_SWITCH_ON_AFTER_DELAY_A - VOC_SWITCHED_ON_ANTIVALENT}		Basic IO
Eu.IO.7729	Info	WAITING_TO_SWITCH_OFF_AFTER_DELAY_A		Basic IO
Eu.IO.7730	Req	after(D6in_Con_t_Activation_Delay_Off)/{WAITING_TO_SWITCH_OFF_AFTER_DELAY_A - VOC_SWITCHED_ON_ANTIVALENT}		Basic IO
Eu.IO.7731	Req	when(d13in_Switch_Off_Each_Physical_Ouput_Channel OR d9in_Monitored_Disturbance_State = "Physically_Disturbed")/{WAITING_TO_SWITCH_OFF_AFTER_DELAY_A - VOC_SWITCHED_OFF_ANTIVALENT}		Basic IO
Eu.IO.7732	Req	when(d3in_Required_Channel_State = "Switched_On")/{WAITING_TO_SWITCH_OFF_AFTER_DELAY_A - VOC_SWITCHED_OFF_ANTIVALENT}		Basic IO
Eu.IO.7293	Info	F_Detect_Input_Channel_State		Basic IO
Eu.IO.7397	Info	[Block] F_Detect_Input_Channel_State [Functional Viewpoint - Subsystem Requirements - Functional Entity] <div style="border: 1px solid black; padding: 5px; margin-top: 5px;"> <p>ibd [Block] F_Detect_Input_Channel_State [Functional Viewpoint - Subsystem Requirements - Functional Entity]</p> <pre> classDiagram class F_Detect_Input_Channel_State { <<functional entity>> values «BlockProperty» Mem_Last_Detected_Channel_State : String d7out_Detected_Channel_State : String D4in_Con_Channel_Type : String D44in_Con_t_Message_Delay_Time_On : Integer D55in_Con_t_Message_Delay_Time_Off : Integer D6in_Con_tmax_Switching_Period : Integer D11in_State_RIC : String D22in_State_VIC : String } </pre> </div>		Basic IO

ID	Type	Requirement Part 1	Requirement Part 2	Func. Pkg.
Eu.IO.7297	Info	D4in_Con_Channel_Type	The port D4in_Con_Channel_Type provides configuration values for the implementation of the Input Channel. The following values are permitted: - Single (assigned to one physical channel) - Antivalent (assigned to two physical channels) - Equivalent (assigned to two physical channels)	Basic IO
Eu.IO.7295	Info	D11in_State_RIC	The port D11in_State_RIC refines the FlowProperty State_Input_Channels and represents the RIC with the permanent available information at the interface IO3. The Con_t_Debouncing_Time needs to be expired if there is a state change at the RIC, this shall be handled by the physical implementation. The following values are permitted: - Switched On - Switched Off - Disturbed	Basic IO
Eu.IO.7296	Info	D22in_State_VIC	The port D22in_State_VIC refines the FlowProperty State_Input_Channels and represents the VIC with the permanent available information at the interface IO3. The Con_t_Debouncing_Time needs to be expired if there is a state change at the VIC, this shall be handled by the physical implementation. The following values are permitted: - Switched On - Switched Off - Disturbed	Basic IO
Eu.IO.7761	Info	D44in_Con_t_Message_Delay_Time_On	The port D44in_Con_t_Message_Delay_Time_On represents the time value for Con_t_Message_Delay_Time_On. This is the delay time to detect the valid logical state Switched On.	Basic IO
Eu.IO.7762	Info	D55in_Con_t_Message_Delay_Time_Off	The port D55in_Con_t_Message_Delay_Time_Off represents the time value for Con_t_Message_Delay_Time_Off. This is the delay time to detect the valid logical state Switched Off.	Basic IO
Eu.IO.7300	Info	D6in_Con_tmax_Switching_Period	The port D6in_Con_tmax_Switching_Period represents the time value for Con_tmax_Switching_Period.	Basic IO
Eu.IO.7301	Info	d7out_Detected_Channel_State		Basic IO
Eu.IO.7302	Info	F_Detect_Input_Channel_State - Behaviour		Basic IO
Eu.IO.7305	Info	Functional Viewpoint - Subsystem Requirements - Functional Entity STD 2 stm [State Machine] F_Detect_Input_Channel_State - Behaviour [Functional Viewpoint - Subsystem Requirements - Functional Entity STD 2]		Basic IO
Eu.IO.7303	Info	Initial0		Basic IO
Eu.IO.7304	Req	/{Initial0 - CHANNEL_CONFIGURATION}		Basic IO
Eu.IO.7327	Info	CHANNEL_CONFIGURATION		Basic IO
Eu.IO.7328	Req	[D4in_Con_Channel_Type = "ANTIVALENT"]/{CHANNEL_CONFIGURATION - DETECTING_ANTIVALENT_INPUT_CHANNEL_PHYSICAL_STATE_CHANGE}		Basic IO
Eu.IO.7329	Req	[D4in_Con_Channel_Type = "EQUIVALENT"]/{CHANNEL_CONFIGURATION - DETECTING_EQUIVALENT_INPUT_CHANNEL_PHYSICAL_STATE_CHANGE}		Basic IO
Eu.IO.7330	Req	[D4in_Con_Channel_Type = "SINGLE"]/{CHANNEL_CONFIGURATION - DETECTING_SINGLE_INPUT_CHANNEL_PHYSICAL_STATE_CHANGE}		Basic IO
Eu.IO.7308	Info	DETECTING_ANTIVALENT_INPUT_CHANNEL_PHYSICAL_STATE_CHANGE		Basic IO

ID	Type	Requirement Part 1	Requirement Part 2	Func. Pkg.
Eu.IO.7315	Info	<p>Functional Viewpoint - Subsystem Requirements - Functional Entity STD 2.1</p> <pre> stm [Atomic State] DETECTING_ANTIVALENT_INPUT_CHANNEL_PHYSICAL_STATE_CHANGE [Functional Viewpoint - Subsystem Requirements - Functional Entity STD 2.1] [D11in_State_RIC = "ON" AND D22in_State_VIC = "OFF"]/ d7out_Detected_Channel_State := "Switched_On"; Mem_Last_Detected_Channel_State := "Switched_On"; Initial0 [D11in_State_RIC = "OFF" AND D22in_State_VIC = "ON"]/ d7out_Detected_Channel_State := "Switched_Off"; Mem_Last_Detected_Channel_State := "Switched_Off"; Junction0 [D11in_State_RIC = "OFF" AND D22in_State_VIC = "OFF"]/ OR (D11in_State_RIC = "ON" AND D22in_State_VIC = "ON")// when(D11in_State_RIC = "OFF" AND D22in_State_VIC = "ON")/ d7out_Detected_Channel_State := "Switched_Off"; Mem_Last_Detected_Channel_State := "Switched_Off"; when(D11in_State_RIC = "DISTURBED" OR D22in_State_VIC = "DISTURBED")/ Entry/d7out_Detected_Channel_State := "Disturbed"; Mem_Last_Detected_Channel_State := "Disturbed"; when(D11in_State_RIC = "ON" AND D22in_State_VIC = "OFF")/ d7out_Detected_Channel_State := "Switched_On"; Mem_Last_Detected_Channel_State := "Switched_On"; after(D6in_Con_tmax_Switching_Period)/ when(D11in_State_RIC = "DISTURBED" OR D22in_State_VIC = "DISTURBED")/ when(D11in_State_RIC = "DISTURBED" OR D22in_State_VIC = "DISTURBED")/ SWITCHED_ON after(D44in_Con_t_Message_Delay_Time_On) [Mem_Last_Detected_Channel_State = "Switched_Off"]/ d7out_Detected_Channel_State := "Switched_On"; Mem_Last_Detected_Channel_State := "Switched_On"; when(D11in_State_RIC = "ON" AND D22in_State_VIC = "OFF")/ when(D11in_State_RIC = "OFF" AND D22in_State_VIC = "OFF")/ OR (D11in_State_RIC = "ON" AND D22in_State_VIC = "ON") // OPERATIONAL_DISTURBED when(D11in_State_RIC = "OFF" AND D22in_State_VIC = "ON")/ when(D11in_State_RIC = "OFF" AND D22in_State_VIC = "OFF")/ OR (D11in_State_RIC = "ON" AND D22in_State_VIC = "ON") // SWITCHED_OFF after(D55in_Con_t_Message_Delay_Time_Off) [Mem_Last_Detected_Channel_State = "Switched_On"]/ d7out_Detected_Channel_State := "Switched_Off"; Mem_Last_Detected_Channel_State := "Switched_Off"; </pre>		Basic IO
Eu.IO.7313	Info	Initial0		Basic IO
Eu.IO.7314	Req	/{Initial0 - Junction0}		Basic IO
Eu.IO.7316	Info	Junction0		Basic IO
Eu.IO.7320	Req	[D11in_State_RIC = "ON" AND D22in_State_VIC = "OFF"]/ d7out_Detected_Channel_State := "Switched_On"; Mem_Last_Detected_Channel_State := "Switched_On";{Junction0 - SWITCHED_ON}		Basic IO
Eu.IO.7318	Req	[D11in_State_RIC = "DISTURBED" OR D22in_State_VIC = "DISTURBED"]/{Junction0 - DISTURBED}		Basic IO
Eu.IO.7317	Req	[([D11in_State_RIC = "OFF" AND D22in_State_VIC = "OFF"] OR (D11in_State_RIC = "ON" AND D22in_State_VIC = "ON"))]{Junction0 - DISTURBED}		Basic IO
Eu.IO.7319	Req	[D11in_State_RIC = "OFF" AND D22in_State_VIC = "ON"]/ d7out_Detected_Channel_State := "Switched_Off"; Mem_Last_Detected_Channel_State := "Switched_Off";{Junction0 - SWITCHED_OFF}		Basic IO
Eu.IO.7324	Info	SWITCHED_ON		Basic IO
Eu.IO.7325	Req	when((D11in_State_RIC = "OFF" AND D22in_State_VIC = "OFF") OR (D11in_State_RIC = "ON" AND D22in_State_VIC = "ON")){(SWITCHED_ON - OPERATIONAL_DISTURBED)}		Basic IO
Eu.IO.7326	Req	when(D11in_State_RIC = "DISTURBED" OR D22in_State_VIC = "DISTURBED"){(SWITCHED_ON - DISTURBED)}		Basic IO
Eu.IO.7674	Req	when(D11in_State_RIC = "OFF" AND D22in_State_VIC = "ON"){(SWITCHED_ON - SWITCHED_OFF)}		Basic IO
Eu.IO.7769	Req	after(D44in_Con_t_Message_Delay_Time_On)[Mem_Last_Detected_Channel_State = "Switched_Off"]/ d7out_Detected_Channel_State := "Switched_On"; Mem_Last_Detected_Channel_State := "Switched_On";{State-internal in SWITCHED_ON}		Basic IO
Eu.IO.7309	Info	OPERATIONAL_DISTURBED		Basic IO
Eu.IO.7310	Req	after(D6in_Con_tmax_Switching_Period){OPERATIONAL_DISTURBED - DISTURBED}		Basic IO
Eu.IO.7311	Req	when(D11in_State_RIC = "OFF" AND D22in_State_VIC = "ON"){(OPERATIONAL_DISTURBED - SWITCHED_OFF)}		Basic IO
Eu.IO.7312	Req	when(D11in_State_RIC = "ON" AND D22in_State_VIC = "OFF"){(OPERATIONAL_DISTURBED - SWITCHED_ON)}		Basic IO
Eu.IO.7767	Req	when(D11in_State_RIC = "DISTURBED" OR D22in_State_VIC = "DISTURBED"){(OPERATIONAL_DISTURBED - DISTURBED)}		Basic IO
Eu.IO.7321	Info	SWITCHED_OFF		Basic IO
Eu.IO.7322	Req	when((D11in_State_RIC = "OFF" AND D22in_State_VIC = "OFF") OR (D11in_State_RIC = "ON" AND D22in_State_VIC = "ON")){(SWITCHED_OFF - OPERATIONAL_DISTURBED)}		Basic IO

ID	Type	Requirement Part 1	Requirement Part 2	Func. Pkg.
Eu.IO.7323	Req	when(D11in_State_RIC = "DISTURBED" OR D22in_State_VIC = "DISTURBED"){SWITCHED_OFF - DISTURBED}		Basic IO
Eu.IO.7673	Req	when(D11in_State_RIC = "ON" AND D22in_State_VIC = "OFF"){SWITCHED_OFF - SWITCHED_ON}		Basic IO
Eu.IO.7768	Req	after(D55in_Con_t_Message_Delay_Time_Off)[Mem_Last_Detected_Channel_State = "Switched_On"]/ d7out_Detected_Channel_State := "Switched_Off"; Mem_Last_Detected_Channel_State := "Switched_Off";{State-internal in SWITCHED_OFF}		Basic IO
Eu.IO.7763	Info	DISTURBED		Basic IO
Eu.IO.7764	Req	entry/d7out_Detected_Channel_State := "Disturbed"; Mem_Last_Detected_Channel_State := "Disturbed";{State-internal in DISTURBED}		Basic IO
Eu.IO.7765	Req	when(D11in_State_RIC = "OFF" AND D22in_State_VIC = "ON")/ d7out_Detected_Channel_State := "Switched_Off"; Mem_Last_Detected_Channel_State := "Switched_Off";{DISTURBED - SWITCHED_OFF}		Basic IO
Eu.IO.7766	Req	when(D11in_State_RIC = "ON" AND D22in_State_VIC = "OFF")/ d7out_Detected_Channel_State := "Switched_On"; Mem_Last_Detected_Channel_State := "Switched_On";{DISTURBED - SWITCHED_ON}		Basic IO
Eu.IO.7331	Info	DETECTING_EQUIVALENT_INPUT_CHANNEL_PHYSICAL_STATE_CHANGE		Basic IO
Eu.IO.7338	Info	<p>Functional Viewpoint - Subsystem Requirements - Functional Entity STD 2.2</p> <pre> stm [Atomic State] DETECTING_EQUIVALENT_INPUT_CHANNEL_PHYSICAL_STATE_CHANGE [Functional Viewpoint - Subsystem Requirements - Functional Entity STD 2.2] Initial0 Junction0 SWITCHED_ON DISTURBED OPERATIONAL_DISTURBED SWITCHED_OFF </pre> <p>The diagram is a state machine for the state <code>DETECTING_EQUIVALENT_INPUT_CHANNEL_PHYSICAL_STATE_CHANGE</code>. It starts at <code>Initial0</code> and transitions to <code>Junction0</code>. From <code>Junction0</code>, there are four main paths:</p> <ul style="list-style-type: none"> SWITCHED_ON: Triggered by <code>when(D11in_State_RIC = "ON" AND D22in_State_VIC = "ON") /</code>. It includes an <code>after(D44in_Con_t_Message_Delay_Time_On)</code> event and sets <code>d7out_Detected_Channel_State := "Switched_On"</code> and <code>Mem_Last_Detected_Channel_State := "Switched_On"</code>. DISTURBED: Triggered by <code>when(D11in_State_RIC = "DISTURBED" OR D22in_State_VIC = "DISTURBED") /</code>. It includes an <code>entry/d7out_Detected_Channel_State := "Disturbed"; Mem_Last_Detected_Channel_State := "Disturbed";</code> and an <code>after(D6in_Con_tmax_Switching_Period)</code> event. OPERATIONAL_DISTURBED: Triggered by <code>when(D11in_State_RIC = "OFF" AND D22in_State_VIC = "OFF") /</code>. It includes a <code>when(D11in_State_RIC = "DISTURBED" OR D22in_State_VIC = "DISTURBED") /</code> condition. SWITCHED_OFF: Triggered by <code>when(D11in_State_RIC = "OFF" AND D22in_State_VIC = "OFF") /</code>. It includes an <code>after(D55in_Con_t_Message_Delay_Time_Off)</code> event and sets <code>d7out_Detected_Channel_State := "Switched_Off"</code> and <code>Mem_Last_Detected_Channel_State := "Switched_Off"</code>. <p>Transitions between states are defined by various <code>when</code> conditions involving <code>D11in_State_RIC</code> and <code>D22in_State_VIC</code> values.</p>		Basic IO
Eu.IO.7336	Info	Initial0		Basic IO
Eu.IO.7337	Req	/{Initial0 - Junction0}		Basic IO
Eu.IO.7339	Info	Junction0		Basic IO
Eu.IO.7343	Req	[D11in_State_RIC = "ON" AND D22in_State_VIC = "ON"]/ d7out_Detected_Channel_State := "Switched_On"; Mem_Last_Detected_Channel_State := "Switched_On";{Junction0 - SWITCHED_ON}		Basic IO
Eu.IO.7340	Req	[D11in_State_RIC = "DISTURBED" OR D22in_State_VIC = "DISTURBED"]/{Junction0 - DISTURBED}		Basic IO
Eu.IO.7341	Req	[(D11in_State_RIC = "OFF" AND D22in_State_VIC = "ON") OR (D11in_State_RIC = "ON" AND D22in_State_VIC = "OFF")]/{Junction0 - DISTURBED}		Basic IO
Eu.IO.7342	Req	[D11in_State_RIC = "OFF" AND D22in_State_VIC = "OFF"]/ d7out_Detected_Channel_State := "Switched_Off"; Mem_Last_Detected_Channel_State := "Switched_Off";{Junction0 - SWITCHED_OFF}		Basic IO
Eu.IO.7347	Info	SWITCHED_ON		Basic IO
Eu.IO.7348	Req	when((D11in_State_RIC = "OFF" AND D22in_State_VIC = "ON") OR (D11in_State_RIC = "ON" AND D22in_State_VIC = "OFF"))/{SWITCHED_ON - OPERATIONAL_DISTURBED}		Basic IO

ID	Type	Requirement Part 1	Requirement Part 2	Func. Pkg.
Eu.IO.7349	Req	when(D11in_State_RIC = "DISTURBED" OR D22in_State_VIC = "DISTURBED")/{SWITCHED_ON - DISTURBED}		Basic IO
Eu.IO.7676	Req	when(D11in_State_RIC = "OFF" AND D22in_State_VIC = "OFF")/{SWITCHED_ON - SWITCHED_OFF}		Basic IO
Eu.IO.7776	Req	after(D44in_Con_t_Message_Delay_Time_On)[Mem_Last_Detected_Channel_State = "Switched_Off"]/ d7out_Detected_Channel_State := "Switched_On"; Mem_Last_Detected_Channel_State := "Switched_On";{State-internal in SWITCHED_ON}		Basic IO
Eu.IO.7332	Info	OPERATIONAL_DISTURBED		Basic IO
Eu.IO.7333	Req	after(D6in_Con_tmax_Switching_Period){OPERATIONAL_DISTURBED - DISTURBED}		Basic IO
Eu.IO.7334	Req	when(D11in_State_RIC = "OFF" AND D22in_State_VIC = "OFF")/{OPERATIONAL_DISTURBED - SWITCHED_OFF}		Basic IO
Eu.IO.7335	Req	when(D11in_State_RIC = "ON" AND D22in_State_VIC = "ON")/{OPERATIONAL_DISTURBED - SWITCHED_ON}		Basic IO
Eu.IO.7774	Req	when(D11in_State_RIC = "DISTURBED" OR D22in_State_VIC = "DISTURBED")/{OPERATIONAL_DISTURBED - DISTURBED}		Basic IO
Eu.IO.7344	Info	SWITCHED_OFF		Basic IO
Eu.IO.7345	Req	when((D11in_State_RIC = "OFF" AND D22in_State_VIC = "ON") OR (D11in_State_RIC = "ON" AND D22in_State_VIC = "OFF"))/{SWITCHED_OFF - OPERATIONAL_DISTURBED}		Basic IO
Eu.IO.7346	Req	when(D11in_State_RIC = "DISTURBED" OR D22in_State_VIC = "DISTURBED")/{SWITCHED_OFF - DISTURBED}		Basic IO
Eu.IO.7675	Req	when(D11in_State_RIC = "ON" AND D22in_State_VIC = "ON")/{SWITCHED_OFF - SWITCHED_ON}		Basic IO
Eu.IO.7775	Req	after(D55in_Con_t_Message_Delay_Time_Off)[Mem_Last_Detected_Channel_State = "Switched_On"]/ d7out_Detected_Channel_State := "Switched_Off"; Mem_Last_Detected_Channel_State := "Switched_Off";{State-internal in SWITCHED_OFF}		Basic IO
Eu.IO.7770	Info	DISTURBED		Basic IO
Eu.IO.7771	Req	entry/d7out_Detected_Channel_State := "Disturbed"; Mem_Last_Detected_Channel_State := "Disturbed";{State-internal in DISTURBED}		Basic IO
Eu.IO.7772	Req	when(D11in_State_RIC = "OFF" AND D22in_State_VIC = "OFF")/ d7out_Detected_Channel_State := "Switched_Off"; Mem_Last_Detected_Channel_State := "Switched_Off";{DISTURBED - SWITCHED_OFF}		Basic IO
Eu.IO.7773	Req	when(D11in_State_RIC = "ON" AND D22in_State_VIC = "ON")/ d7out_Detected_Channel_State := "Switched_On"; Mem_Last_Detected_Channel_State := "Switched_On";{DISTURBED - SWITCHED_ON}		Basic IO
Eu.IO.7352	Info	DETECTING_SINGLE_INPUT_CHANNEL_PHYSICAL_STATE_CHANGE		Basic IO
Eu.IO.7358	Info	<p>Functional Viewpoint - Subsystem Requirements - Functional Entity STD 2.3</p> <pre> stm DETECTING_SINGLE_INPUT_CHANNEL_PHYSICAL_STATE_CHANGE [Functional Viewpoint - Subsystem Requirements - Functional Entity STD 2.3] [D11in_State_RIC = "ON"]/ d7out_Detected_Channel_State := "Switched_On"; Mem_Last_Detected_Channel_State := "Switched_On"; Junction0 when(D11in_State_RIC = "ON")/ d7out_Detected_Channel_State := "Switched_On"; Mem_Last_Detected_Channel_State := "Switched_On"; DISTURBED Entry/d7out_Detected_Channel_State := "Disturbed"; Mem_Last_Detected_Channel_State := "Disturbed"; when(D11in_State_RIC = "DISTURBED")/ when(D11in_State_RIC = "DISTURBED")/ SWITCHED_ON after(D44in_Con_t_Message_Delay_Time_On) [Mem_Last_Detected_Channel_State = "Switched_Off"]/ d7out_Detected_Channel_State := "Switched_On"; Mem_Last_Detected_Channel_State := "Switched_On"; when(D11in_State_RIC = "OFF")/ when(D11in_State_RIC = "ON")/ SWITCHED_OFF after(D55in_Con_t_Message_Delay_Time_Off) [Mem_Last_Detected_Channel_State = "Switched_On"]/ d7out_Detected_Channel_State := "Switched_Off"; Mem_Last_Detected_Channel_State := "Switched_Off"; </pre>		Basic IO
Eu.IO.7356	Info	Initial0		Basic IO
Eu.IO.7357	Req	{/Initial0 - Junction0}		Basic IO
Eu.IO.7359	Info	Junction0		Basic IO
Eu.IO.7362	Req	[D11in_State_RIC = "ON"]/ d7out_Detected_Channel_State := "Switched_On"; Mem_Last_Detected_Channel_State := "Switched_On";{Junction0 - SWITCHED_ON}		Basic IO

ID	Type	Requirement Part 1	Requirement Part 2	Func. Pkg.
Eu.IO.7360	Req	[D11in_State_RIC = "DISTURBED"]/{Junction0 - DISTURBED}		Basic IO
Eu.IO.7361	Req	[D11in_State_RIC = "OFF"]/ d7out_Detected_Channel_State := "Switched_Off"; Mem_Last_Detected_Channel_State := "Switched_Off";{Junction0 - SWITCHED_OFF}		Basic IO
Eu.IO.7366	Info	SWITCHED_ON		Basic IO
Eu.IO.7367	Req	when(D11in_State_RIC = "DISTURBED")/{SWITCHED_ON - DISTURBED}		Basic IO
Eu.IO.7368	Req	when(D11in_State_RIC = "OFF")/{SWITCHED_ON - SWITCHED_OFF}		Basic IO
Eu.IO.7779	Req	after(D44in_Con_t_Message_Delay_Time_On)[Mem_Last_Detected_Channel_State = "Switched_Off"]/ d7out_Detected_Channel_State := "Switched_On"; Mem_Last_Detected_Channel_State := "Switched_On";{State-internal in SWITCHED_ON}		Basic IO
Eu.IO.7353	Info	DISTURBED		Basic IO
Eu.IO.7354	Req	when(D11in_State_RIC = "OFF")/ d7out_Detected_Channel_State := "Switched_Off"; Mem_Last_Detected_Channel_State := "Switched_Off";{DISTURBED - SWITCHED_OFF}		Basic IO
Eu.IO.7355	Req	when(D11in_State_RIC = "ON")/ d7out_Detected_Channel_State := "Switched_On"; Mem_Last_Detected_Channel_State := "Switched_On";{DISTURBED - SWITCHED_ON}		Basic IO
Eu.IO.7777	Req	entry/d7out_Detected_Channel_State := "Disturbed"; Mem_Last_Detected_Channel_State := "Disturbed";{State-internal in DISTURBED}		Basic IO
Eu.IO.7363	Info	SWITCHED_OFF		Basic IO
Eu.IO.7364	Req	when(D11in_State_RIC = "DISTURBED")/{SWITCHED_OFF - DISTURBED}		Basic IO
Eu.IO.7365	Req	when(D11in_State_RIC = "ON")/{SWITCHED_OFF - SWITCHED_ON}		Basic IO
Eu.IO.7778	Req	after(D55in_Con_t_Message_Delay_Time_Off)[Mem_Last_Detected_Channel_State = "Switched_On"]/ d7out_Detected_Channel_State := "Switched_Off"; Mem_Last_Detected_Channel_State := "Switched_Off";{State-internal in SWITCHED_OFF}		Basic IO
Eu.IO.7780	Info	F_Monitor_Output_Channel_Disturbance_State		Basic IO
Eu.IO.7781	Info	[Block] F_Monitor_Output_Channel_Disturbance_State [Functional Viewpoint - Subsystem Requirements - Functional Entity] <div style="border: 1px solid black; padding: 5px; margin: 5px 0;"> <div style="background-color: #00FF00; padding: 2px; text-align: center;">«functional entity»</div> <div style="background-color: #00FF00; padding: 2px; text-align: center;">F_Monitor_Output_Channel_Disturbance_State</div> <div style="margin-top: 5px;"> d9out_Monitored_Disturbance_State : String D4in_Con_Channel_Type : String </div> <div style="margin-top: 10px;"> D41in_Disturbance_ROC : Boolean </div> <div style="margin-top: 10px;"> D42in_Disturbance_VOC : Boolean </div> <div style="margin-top: 10px;"> D8in_Con_Monitored : Boolean </div> </div>		Basic IO
Eu.IO.7782	Info	D41in_Disturbance_ROC	The port D41in_Disturbance_ROC represents the physically disturbance at the ROC. If D41in_Disturbance_ROC is true the Adjacent IO System do not switch to the permanent available target state from D1out_State_ROC. It is expected that it turns to false if a command was executed. The following values are permitted: - True: Physically Disturbed - False: Not Physically Disturbed	Basic IO
Eu.IO.7783	Info	D42in_Disturbance_VOC	The port D42in_Disturbance_VOC represents the physically disturbance at the VOC. If D42in_Disturbance_VOC is true the Adjacent IO System do not switch to the permanent available target state from D2out_State_VOC. It is expected that it turns to false if a command was executed. The following values are permitted: - True: Physically Disturbed - False: Not Physically Disturbed	Basic IO
Eu.IO.7784	Info	D4in_Con_Channel_Type	The port D4in_Con_Channel_Type provides configuration values for the implementation of the logical Output Channel. The following values are permitted: - Single (assigned to one physical channel) - Antivalent (assigned to two physical channels) - Equivalent (assigned to two physical channels)	Basic IO
Eu.IO.7785	Info	D8in_Con_Monitored	The port D8in_Con_Monitored provides configuration values for the logical Output Channel. The following values are permitted: - True: Output Channel is monitored - False: Output Channel is not monitored	Basic IO


ID	Type	Requirement Part 1	Requirement Part 2	Func. Pkg.
Eu.IO.7803	Info	<p>[Package] SCI-IO - Information Flows [Interface Requirements - Directions of Information Objects]</p> <p>bdd [Package] SCI-IO - Information Flows [Interface Requirements - Directions of Information Objects]</p>		Basic IO
Eu.IO.7816	Info	<p>[Package] SCI-IO - Information Flows [Interface Requirements - Information Objects]</p> <p>bdd [Package] SCI-IO - Information Flows [Interface Requirements - Information Objects]</p>		Basic IO
Eu.IO.1693	Info	The generic commands and messages through the SCI-IO are specified in Eu.Doc.119.		Basic IO
Eu.IO.7962	Info	Cd_Set_Output_Channels	Command (Cd) from Subsystem - Electronic Interlocking to Subsystem Generic IO, to set all the states, transmitted as parameter, at all the logical Output Channels of the transmitted Adjacent IO System.	Basic IO
Eu.IO.7963	Info	Msg_State_Of_Input_Channels	Message (Msg) from Subsystem Generic IO to Subsystem - Electronic Interlocking to report the status of the current state of the logical Input Channels of the transmitted Adjacent IO System.	Basic IO

ID	Type	Requirement Part 1	Requirement Part 2	Func. Pkg.
Eu.IO.7964	Info	Msg_State_Of_Output_Channels	Message (Msg) from Subsystem Generic IO to Subsystem - Electronic Interlocking to report the status related to disturbance of the logical Output Channels of the transmitted Adjacent IO System.	Basic IO
Eu.IO.7817	Head	3.4.1.3 SCI-IO - Functional Viewpoint		
Eu.IO.7974	Head	3.4.1.3.1 SCI-IO - Functional Partitioning		
Eu.IO.7284	Info	<p>[Package] SCI-IO - Functional Partitioning [Functional Viewpoint - Interface Requirements]</p> <p>bdd [Package] SCI-IO - Functional Partitioning [Functional Viewpoint - Interface Requirements]</p>		Basic IO
Eu.IO.7960	Head	3.4.1.3.2 SCI-IO - Functional Architecture		
Eu.IO.7280	Info	SCI-IO		Basic IO

ID	Type	Requirement Part 1	Requirement Part 2	Func. Pkg.
Eu.IO.7281	Info	<p>[Block] SCI-IO [Functional Viewpoint - Interface Requirements - Functional Architecture]</p> <p>ibd [Block] SCI-IO [Functional Viewpoint - Interface Requirements - Functional Architecture]</p>		Basic IO
Eu.IO.7961	Head	<p>3.4.1.3.3 SCI-IO - Functional Entities</p>		
Eu.IO.7897	Info	<p>S_SCI_IO_Command</p>		Basic IO
Eu.IO.7898	Info	<p>[Block] S_SCI_IO_Command [Functional Viewpoint - Interface Requirements - Functional Entity]</p> <p>ibd [Block] S_SCI_IO_Command [Functional Viewpoint - Interface Requirements - Functional Entity]</p>		Basic IO
Eu.IO.7902	Info	<p>d50in_PDI_Connection_State</p>		Basic IO
Eu.IO.7917	Info	<p>t30in_New_Output_Channel_State_Required</p>		Basic IO
Eu.IO.7900	Info	<p>d31in_Required_Channel_State1</p>		Basic IO
Eu.IO.7901	Info	<p>d32in_Required_Channel_StateN</p>		Basic IO
Eu.IO.7899	Info	<p>P10out</p>	<p>The port P10out exchanges information objects according to SCI_IO_1.</p>	Basic IO
Eu.IO.7903	Info	<p>S_SCI_IO_Command - Behaviour</p>		Basic IO

ID	Type	Requirement Part 1	Requirement Part 2	Func. Pkg.
Eu.IO.7904	Info	Functional Viewpoint - Interface Requirements - Functional Entity STD 1.1 stm [State Machine] S_SCI_IO_Command - Behaviour [Functional Viewpoint - Interface Requirements - Functional Entity STD 1.1] <pre> when(t30in_New_Output_Channel_State_Required) [d31in_Required_Channel_State1 = "Switched_Off" AND d32in_Required_Channel_StateN = "Switched_Off" AND d50in_PDI_Connection_State = "ESTABLISHED"] /send Cd_Set_Output_Channels (Switched_Off, Switched_Off) to P10out; when(t30in_New_Output_Channel_State_Required) [d31in_Required_Channel_State1 = "Switched_Off" AND d32in_Required_Channel_StateN = "Switched_On" AND d50in_PDI_Connection_State = "ESTABLISHED"] /send Cd_Set_Output_Channels (Switched_Off, Switched_On) to P10out; when(t30in_New_Output_Channel_State_Required) [d31in_Required_Channel_State1 = "Switched_Off" AND d32in_Required_Channel_StateN = "Flashing" AND d50in_PDI_Connection_State = "ESTABLISHED"] /send Cd_Set_Output_Channels (Switched_Off, Flashing) to P10out; when(t30in_New_Output_Channel_State_Required) [d31in_Required_Channel_State1 = "Switched_On" AND d32in_Required_Channel_StateN = "Switched_On" AND d50in_PDI_Connection_State = "ESTABLISHED"] /send Cd_Set_Output_Channels (Switched_On, Switched_On) to P10out; when(t30in_New_Output_Channel_State_Required) [d31in_Required_Channel_State1 = "Switched_On" AND d32in_Required_Channel_StateN = "Switched_Off" AND d50in_PDI_Connection_State = "ESTABLISHED"] /send Cd_Set_Output_Channels (Switched_On, Switched_Off) to P10out; when(t30in_New_Output_Channel_State_Required) [d31in_Required_Channel_State1 = "Switched_On" AND d32in_Required_Channel_StateN = "Flashing" AND d50in_PDI_Connection_State = "ESTABLISHED"] /send Cd_Set_Output_Channels (Switched_On, Flashing) to P10out; when(t30in_New_Output_Channel_State_Required) [d31in_Required_Channel_State1 = "Flashing" AND d32in_Required_Channel_StateN = "Flashing" AND d50in_PDI_Connection_State = "ESTABLISHED"] /send Cd_Set_Output_Channels (Flashing, Flashing) to P10out; when(t30in_New_Output_Channel_State_Required) [d31in_Required_Channel_State1 = "Flashing" AND d32in_Required_Channel_StateN = "Switched_On" AND d50in_PDI_Connection_State = "ESTABLISHED"] /send Cd_Set_Output_Channels (Flashing, Switched_On) to P10out; when(t30in_New_Output_Channel_State_Required) [d31in_Required_Channel_State1 = "Flashing" AND d32in_Required_Channel_StateN = "Switched_Off" AND d50in_PDI_Connection_State = "ESTABLISHED"] /send Cd_Set_Output_Channels (Flashing, Switched_Off) to P10out; </pre>		Basic IO
Eu.IO.7905	Info	Initial0		Basic IO
Eu.IO.7906	Req	/{Initial0 - SENDING_OUTPUT_CHANNEL_COMMAND}		Basic IO
Eu.IO.7907	Info	SENDING_OUTPUT_CHANNEL_COMMAND		Basic IO
Eu.IO.7908	Req	when(t30in_New_Output_Channel_State_Required)[d31in_Required_Channel_State1 = "Switched_Off" AND d32in_Required_Channel_StateN = "Switched_Off" AND d50in_PDI_Connection_State = "ESTABLISHED"]/send Cd_Set_Output_Channels(Switched_Off,Switched_Off) to P10out;{State-internal in SENDING_OUTPUT_CHANNEL_COMMAND}		Basic IO
Eu.IO.7909	Req	when(t30in_New_Output_Channel_State_Required)[d31in_Required_Channel_State1 = "Switched_Off" AND d32in_Required_Channel_StateN = "Switched_On" AND d50in_PDI_Connection_State = "ESTABLISHED"]/send Cd_Set_Output_Channels(Switched_Off,Switched_On) to P10out; {State-internal in SENDING_OUTPUT_CHANNEL_COMMAND}		Basic IO
Eu.IO.7910	Req	when(t30in_New_Output_Channel_State_Required)[d31in_Required_Channel_State1 = "Switched_Off" AND d32in_Required_Channel_StateN = "Flashing" AND d50in_PDI_Connection_State = "ESTABLISHED"]/send Cd_Set_Output_Channels(Switched_Off,Flashing) to P10out; {State-internal in SENDING_OUTPUT_CHANNEL_COMMAND}		Option flashing
Eu.IO.7911	Req	when(t30in_New_Output_Channel_State_Required)[d31in_Required_Channel_State1 = "Switched_On" AND d32in_Required_Channel_StateN = "Switched_On" AND d50in_PDI_Connection_State = "ESTABLISHED"]/send Cd_Set_Output_Channels(Switched_On,Switched_On) to P10out; {State-internal in SENDING_OUTPUT_CHANNEL_COMMAND}		Basic IO
Eu.IO.7912	Req	when(t30in_New_Output_Channel_State_Required)[d31in_Required_Channel_State1 = "Switched_On" AND d32in_Required_Channel_StateN = "Switched_Off" AND d50in_PDI_Connection_State = "ESTABLISHED"]/send Cd_Set_Output_Channels(Switched_On,Switched_Off) to P10out; {State-internal in SENDING_OUTPUT_CHANNEL_COMMAND}		Basic IO
Eu.IO.7913	Req	when(t30in_New_Output_Channel_State_Required)[d31in_Required_Channel_State1 = "Switched_On" AND d32in_Required_Channel_StateN = "Flashing" AND d50in_PDI_Connection_State = "ESTABLISHED"]/send Cd_Set_Output_Channels(Switched_On,Flashing) to P10out; {State-internal in SENDING_OUTPUT_CHANNEL_COMMAND}		Option flashing
Eu.IO.7914	Req	when(t30in_New_Output_Channel_State_Required)[d31in_Required_Channel_State1 = "Flashing" AND d32in_Required_Channel_StateN = "Flashing" AND d50in_PDI_Connection_State = "ESTABLISHED"]/send Cd_Set_Output_Channels(Flashing,Flashing) to P10out; {State-internal in SENDING_OUTPUT_CHANNEL_COMMAND}		Option flashing
Eu.IO.7915	Req	when(t30in_New_Output_Channel_State_Required)[d31in_Required_Channel_State1 = "Flashing" AND d32in_Required_Channel_StateN = "Switched_On" AND d50in_PDI_Connection_State = "ESTABLISHED"]/send Cd_Set_Output_Channels(Flashing,Switched_On) to P10out; {State-internal in SENDING_OUTPUT_CHANNEL_COMMAND}		Option flashing
Eu.IO.7916	Req	when(t30in_New_Output_Channel_State_Required)[d31in_Required_Channel_State1 = "Flashing" AND d32in_Required_Channel_StateN = "Switched_Off" AND d50in_PDI_Connection_State = "ESTABLISHED"]/send Cd_Set_Output_Channels(Flashing,Switched_Off) to P10out; {State-internal in SENDING_OUTPUT_CHANNEL_COMMAND}		Option flashing
Eu.IO.7561	Info	S_SCI_IO_Receive		Basic IO
Eu.IO.7599	Info	[Block] S_SCI_IO_Receive [Functional Viewpoint - Interface Requirements - Functional Entity] ibd [Block] S_SCI_IO_Receive [Functional Viewpoint - Interface Requirements - Functional Entity] 		Basic IO
Eu.IO.7563	Info	d50in_PDI_Connection_State		Basic IO
Eu.IO.7570	Info	d91out_Reported_Output_Channel_Disturbance_State1		Basic IO
Eu.IO.7920	Info	d92out_Reported_Output_Channel_Disturbance_StateN		Basic IO
Eu.IO.7566	Info	d71out_Reported_Input_Channel_State1		Basic IO

ID	Type	Requirement Part 1	Requirement Part 2	Func. Pkg.
Eu.IO.7919	Info	d72out_Reported_Input_Channel_StateN		Basic IO
Eu.IO.7918	Info	P20in	The port P20in exchanges information objects according to SCI_IO_2.	Basic IO
Eu.IO.7576	Info	S_SCI_IO_Receive - Behaviour		Basic IO
Eu.IO.7584	Info	<p>Functional Viewpoint - Interface Requirements - Functional Entity STD 1.2</p> <pre> stm [State Machine] S_SCI_IO_Receive - Behaviour [Functional Viewpoint - Interface Requirements - Functional Entity STD 1.2] when(d50in_PDI_Connection_State = "DISCONNECTED" OR d50in_PDI_Connection_State = "IMPERMISSIBLE" OR d50in_PDI_Connection_State = "SUSPENDED" OR d50in_PDI_Connection_State = "REQUESTED_NO_SCP") / </pre> <p>RECEIVING_INPUT_CHANNEL_REPORTS</p> <pre> Entry/d71out_Reported_Input_Channel_State1 := "Unknown"; d72out_Reported_Input_Channel_StateN := "Unknown"; Msg_State_Of_Input_Channels[ReportedInputState1 = Switched_On AND ReportedInputStateN = Switched_On] / d71out_Reported_Input_Channel_State1 := "Switched_On"; d72out_Reported_Input_Channel_StateN := "Switched_On"; Msg_State_Of_Input_Channels[ReportedInputState1 = Switched_Off AND ReportedInputStateN = Switched_Off] / d71out_Reported_Input_Channel_State1 := "Switched_Off"; d72out_Reported_Input_Channel_StateN := "Switched_Off"; Msg_State_Of_Input_Channels[ReportedInputState1 = Disturbed AND ReportedInputStateN = Disturbed] / d71out_Reported_Input_Channel_State1 := "Disturbed"; d72out_Reported_Input_Channel_StateN := "Disturbed"; Msg_State_Of_Input_Channels[ReportedInputState1 = Switched_Off AND ReportedInputStateN = Switched_On] / d71out_Reported_Input_Channel_State1 := "Switched_Off"; d72out_Reported_Input_Channel_StateN := "Switched_On"; Msg_State_Of_Input_Channels[ReportedInputState1 = Switched_On AND ReportedInputStateN = Switched_Off] / d71out_Reported_Input_Channel_State1 := "Switched_On"; d72out_Reported_Input_Channel_StateN := "Switched_Off"; Msg_State_Of_Input_Channels[ReportedInputState1 = Switched_Off AND ReportedInputStateN = Disturbed] / d71out_Reported_Input_Channel_State1 := "Switched_Off"; d72out_Reported_Input_Channel_StateN := "Disturbed"; Msg_State_Of_Input_Channels[ReportedInputState1 = Switched_On AND ReportedInputStateN = Disturbed] / d71out_Reported_Input_Channel_State1 := "Switched_On"; d72out_Reported_Input_Channel_StateN := "Disturbed"; Msg_State_Of_Input_Channels[ReportedInputState1 = Disturbed AND ReportedInputStateN = Switched_Off] / d71out_Reported_Input_Channel_State1 := "Disturbed"; d72out_Reported_Input_Channel_StateN := "Switched_Off"; Msg_State_Of_Input_Channels[ReportedInputState1 = Disturbed AND ReportedInputStateN = Switched_On] / d71out_Reported_Input_Channel_State1 := "Disturbed"; d72out_Reported_Input_Channel_StateN := "Switched_On"; </pre> <p>RECEIVING_OUTPUT_CHANNEL_REPORTS</p> <pre> Entry/d91out_Reported_Output_Channel_Disturbance_State1 := "Unknown"; d92out_Reported_Output_Channel_Disturbance_StateN := "Unknown"; Msg_State_Of_Output_Channels[ReportedDisturbanceState1 = Not_Physically_Disturbed AND ReportedDisturbanceStateN = Not_Physically_Disturbed] / d91out_Reported_Output_Channel_Disturbance_State1 := "Not_Physically_Disturbed"; d92out_Reported_Output_Channel_Disturbance_StateN := "Not_Physically_Disturbed"; Msg_State_Of_Output_Channels[ReportedDisturbanceState1 = Physically_Disturbed AND ReportedDisturbanceStateN = Physically_Disturbed] / d91out_Reported_Output_Channel_Disturbance_State1 := "Physically_Disturbed"; d92out_Reported_Output_Channel_Disturbance_StateN := "Physically_Disturbed"; Msg_State_Of_Output_Channels[ReportedDisturbanceState1 = Not_Physically_Disturbed AND ReportedDisturbanceStateN = Physically_Disturbed] / d91out_Reported_Output_Channel_Disturbance_State1 := "Not_Physically_Disturbed"; d92out_Reported_Output_Channel_Disturbance_StateN := "Physically_Disturbed"; Msg_State_Of_Output_Channels[ReportedDisturbanceState1 = Physically_Disturbed AND ReportedDisturbanceStateN = Not_Physically_Disturbed] / d91out_Reported_Output_Channel_Disturbance_State1 := "Physically_Disturbed"; d92out_Reported_Output_Channel_Disturbance_StateN := "Not_Physically_Disturbed"; </pre>		Basic IO
Eu.IO.7577	Info	Initial0		Basic IO
Eu.IO.7578	Req	{/Initial0 - RECEIVING_INPUT_AND_OUTPUT_CHANNEL_STATES}		Basic IO
Eu.IO.7585	Info	RECEIVING_INPUT_AND_OUTPUT_CHANNEL_STATES		Basic IO
Eu.IO.7592	Info	RECEIVING_INPUT_CHANNEL_STATES		Basic IO
Eu.IO.7593	Info	Initial1		Basic IO
Eu.IO.7924	Req	{/Initial1 - RECEIVING_INPUT_CHANNEL_REPORTS}		Basic IO
Eu.IO.7925	Info	RECEIVING_INPUT_CHANNEL_REPORTS		Basic IO
Eu.IO.7926	Req	entry/d71out_Reported_Input_Channel_State1 := "Unknown"; d72out_Reported_Input_Channel_StateN := "Unknown";{State-internal in RECEIVING_INPUT_CHANNEL_REPORTS}		Basic IO

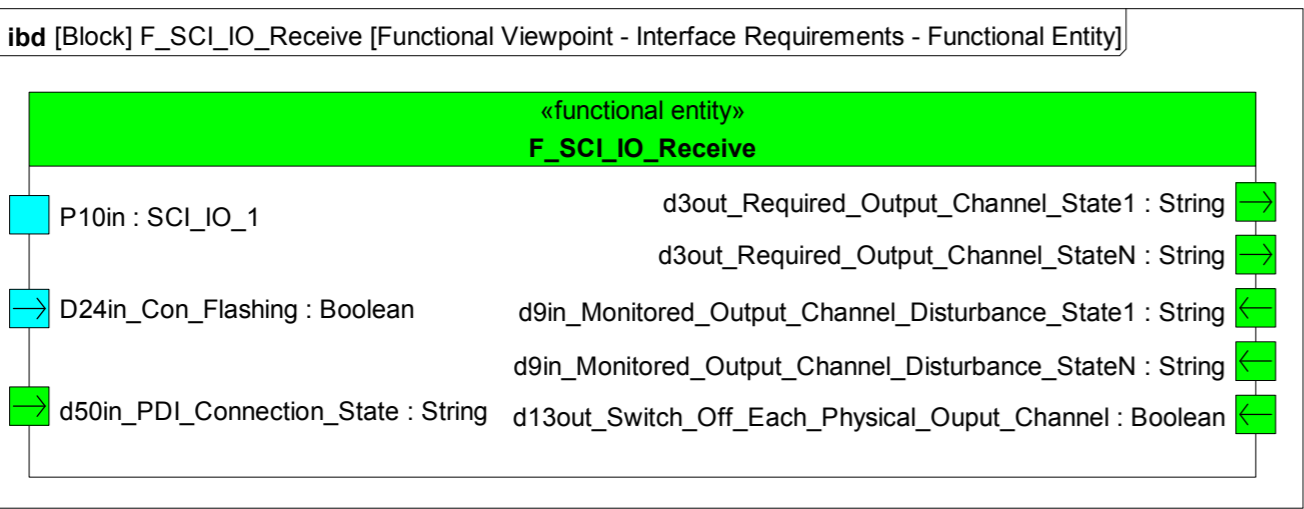ID	Type	Requirement Part 1	Requirement Part 2	Func. Pkg.
Eu.IO.7927	Req	Msg_State_Of_Input_Channels[ResportedInputState1 = Disturbed AND ResportedInputStateN = Switched_On]/ d71out_Reported_Input_Channel_State1 := "Disturbed"; d72out_Reported_Input_Channel_StateN := "Switched_On";{State-internal in RECEIVING_INPUT_CHANNEL_REPORTS}		Basic IO
Eu.IO.7928	Req	Msg_State_Of_Input_Channels[ResportedInputState1 = Switched_On AND ResportedInputStateN = Switched_On]/ d71out_Reported_Input_Channel_State1 := "Switched_On"; d72out_Reported_Input_Channel_StateN := "Switched_On";{State-internal in RECEIVING_INPUT_CHANNEL_REPORTS}		Basic IO
Eu.IO.7929	Req	Msg_State_Of_Input_Channels[ResportedInputState1 = Switched_Off AND ResportedInputStateN = Switched_Off]/ d71out_Reported_Input_Channel_State1 := "Switched_Off"; d72out_Reported_Input_Channel_StateN := "Switched_Off";{State-internal in RECEIVING_INPUT_CHANNEL_REPORTS}		Basic IO
Eu.IO.7930	Req	Msg_State_Of_Input_Channels[ResportedInputState1 = Disturbed AND ResportedInputStateN = Disturbed]/ d71out_Reported_Input_Channel_State1 := "Disturbed"; d72out_Reported_Input_Channel_StateN := "Disturbed";{State-internal in RECEIVING_INPUT_CHANNEL_REPORTS}		Basic IO
Eu.IO.7931	Req	Msg_State_Of_Input_Channels[ResportedInputState1 = Switched_Off AND ResportedInputStateN = Switched_On]/ d71out_Reported_Input_Channel_State1 := "Switched_Off"; d72out_Reported_Input_Channel_StateN := "Switched_On";{State-internal in RECEIVING_INPUT_CHANNEL_REPORTS}		Basic IO
Eu.IO.7932	Req	Msg_State_Of_Input_Channels[ResportedInputState1 = Switched_On AND ResportedInputStateN = Switched_Off]/ d71out_Reported_Input_Channel_State1 := "Switched_On"; d72out_Reported_Input_Channel_StateN := "Switched_Off";{State-internal in RECEIVING_INPUT_CHANNEL_REPORTS}		Basic IO
Eu.IO.7933	Req	Msg_State_Of_Input_Channels[ResportedInputState1 = Switched_Off AND ResportedInputStateN = Disturbed]/ d71out_Reported_Input_Channel_State1 := "Switched_Off"; d72out_Reported_Input_Channel_StateN := "Disturbed";{State-internal in RECEIVING_INPUT_CHANNEL_REPORTS}		Basic IO
Eu.IO.7934	Req	Msg_State_Of_Input_Channels[ResportedInputState1 = Switched_On AND ResportedInputStateN = Disturbed]/ d71out_Reported_Input_Channel_State1 := "Switched_On"; d72out_Reported_Input_Channel_StateN := "Disturbed";{State-internal in RECEIVING_INPUT_CHANNEL_REPORTS}		Basic IO
Eu.IO.7935	Req	Msg_State_Of_Input_Channels[ResportedInputState1 = Disturbed AND ResportedInputStateN = Switched_Off]/ d71out_Reported_Input_Channel_State1 := "Disturbed"; d72out_Reported_Input_Channel_StateN := "Switched_Off";{State-internal in RECEIVING_INPUT_CHANNEL_REPORTS}		Basic IO
Eu.IO.7936	Info	RECEIVING_OUTPUT_CHANNEL_STATES		Basic IO
Eu.IO.7937	Info	Initial2		Basic IO
Eu.IO.7938	Req	/{Initial2 - RECEIVING_OUTPUT_CHANNEL_REPORTS}		Basic IO
Eu.IO.7939	Info	RECEIVING_OUTPUT_CHANNEL_REPORTS		Basic IO
Eu.IO.7940	Req	entry/d91out_Reported_Output_Channel_Disturbance_State1 := "Unknown"; d92out_Reported_Output_Channel_Disturbance_StateN := "Unknown";{State-internal in RECEIVING_OUTPUT_CHANNEL_REPORTS}		Basic IO
Eu.IO.7941	Req	Msg_State_Of_Output_Channels[ResportedDisturbanceState1 = Physically_Disturbed AND ResportedDisturbanceStateN = Physically_Disturbed]/ d91out_Reported_Output_Channel_Disturbance_State1 := "Physically_Disturbed"; d92out_Reported_Output_Channel_Disturbance_StateN := "Physically_Disturbed";{State-internal in RECEIVING_OUTPUT_CHANNEL_REPORTS}		Basic IO
Eu.IO.7942	Req	Msg_State_Of_Output_Channels[ResportedDisturbanceState1 = Not_Physically_Disturbed AND ResportedDisturbanceStateN = Physically_Disturbed]/ d91out_Reported_Output_Channel_Disturbance_State1 := "Not_Physically_Disturbed"; d92out_Reported_Output_Channel_Disturbance_StateN := "Physically_Disturbed";{State-internal in RECEIVING_OUTPUT_CHANNEL_REPORTS}		Basic IO
Eu.IO.7943	Req	Msg_State_Of_Output_Channels[ResportedDisturbanceState1 = Physically_Disturbed AND ResportedDisturbanceStateN = Not_Physically_Disturbed]/ d91out_Reported_Output_Channel_Disturbance_State1 := "Physically_Disturbed"; d92out_Reported_Output_Channel_Disturbance_StateN := "Not_Physically_Disturbed";{State-internal in RECEIVING_OUTPUT_CHANNEL_REPORTS}		Basic IO
Eu.IO.7944	Req	Msg_State_Of_Output_Channels[ResportedDisturbanceState1 = Not_Physically_Disturbed AND ResportedDisturbanceStateN = Not_Physically_Disturbed]/ d91out_Reported_Output_Channel_Disturbance_State1 := "Not_Physically_Disturbed"; d92out_Reported_Output_Channel_Disturbance_StateN := "Not_Physically_Disturbed";{State-internal in RECEIVING_OUTPUT_CHANNEL_REPORTS}		Basic IO
Eu.IO.7946	Req	when(d50in_PDI_Connection_State = "DISCONNECTED" OR d50in_PDI_Connection_State = "IMPERMISSIBLE" OR d50in_PDI_Connection_State = "SUSPENDED" OR d50in_PDI_Connection_State = "REQUESTED_NO_SCP")/{RECEIVING_INPUT_AND_OUTPUT_CHANNEL_STATES - RECEIVING_INPUT_AND_OUTPUT_CHANNEL_STATES}		Basic IO
Eu.IO.7819	Info	F_SCI_IO_Receive		Basic IO
Eu.IO.7851	Info	[Block] F_SCI_IO_Receive [Functional Viewpoint - Interface Requirements - Functional Entity] 		Basic IO
Eu.IO.7856	Info	d50in_PDI_Connection_State		Basic IO
Eu.IO.7852	Info	P10in	The port P10in exchanges information objects according to SCI_IO_1.	Basic IO
Eu.IO.7853	Info	d13out_Switch_Off_Each_Physical_Ouput_Channel		Basic IO
Eu.IO.7854	Info	d3out_Required_Output_Channel_State1		Basic IO
Eu.IO.7855	Info	d3out_Required_Output_Channel_StateN		Basic IO
Eu.IO.7857	Info	d9in_Monitored_Output_Channel_Disturbance_State1		Basic IO

ID	Type	Requirement Part 1	Requirement Part 2	Func. Pkg.
Eu.IO.7833	Req	Cd_Set_Output_Channels[CommandedOutputState1 = Flashing AND D24in_Con_Flashing]/d3out_Required_Output_Channel_State1 := "Flashing";{State-internal in RECEIVING_COMMANDS_CHANNEL_1}		Option flashing
Eu.IO.7834	Req	Cd_Set_Output_Channels[CommandedOutputState1 = Switched_On]/d3out_Required_Output_Channel_State1 := "Switched_On";{State-internal in RECEIVING_COMMANDS_CHANNEL_1}		Basic IO
Eu.IO.7835	Req	when(d13out_Switch_Off_Each_Physical_Ouput_Channel OR d9in_Monitored_Output_Channel_Disturbance_State1 = "Physically_Disturbed")/ d3out_Required_Output_Channel_State1 := "Unknown";{RECEIVING_COMMANDS_CHANNEL_1 - REQUIRED_OUTPUT_CHANNEL_1_STATE_CAN_NOT_BE_SET}		Basic IO
Eu.IO.7983	Req	[d13out_Switch_Off_Each_Physical_Ouput_Channel OR d9in_Monitored_Output_Channel_Disturbance_State1 = "Physically_Disturbed"]/ d3out_Required_Output_Channel_State1 := "Unknown";{RECEIVING_COMMANDS_CHANNEL_1 - REQUIRED_OUTPUT_CHANNEL_1_STATE_CAN_NOT_BE_SET}		Basic IO
Eu.IO.7836	Info	REQUIRED_OUTPUT_CHANNEL_1_STATE_CAN_NOT_BE_SET		Basic IO
Eu.IO.7837	Req	when(d9in_Monitored_Output_Channel_Disturbance_State1 = "Not_Physically_Disturbed")[Not d13out_Switch_Off_Each_Physical_Ouput_Channel]/{REQUIRED_OUTPUT_CHANNEL_1_STATE_CAN_NOT_BE_SET - RECEIVING_COMMANDS_CHANNEL_1}		Basic IO
Eu.IO.7838	Req	when(Not d13out_Switch_Off_Each_Physical_Ouput_Channel)[d9in_Monitored_Output_Channel_Disturbance_State1 = "Not_Physically_Disturbed"]/{REQUIRED_OUTPUT_CHANNEL_1_STATE_CAN_NOT_BE_SET - RECEIVING_COMMANDS_CHANNEL_1}		Basic IO
Eu.IO.7839	Info	OUTPUT_CHANNEL_STATE_N		Basic IO
Eu.IO.7840	Info	RECEIVING_COMMANDS_CHANNEL_N		Basic IO
Eu.IO.7841	Req	Cd_Set_Output_Channels[CommandedOutputStateN = Switched_Off]/d3out_Required_Output_Channel_StateN := "Switched_Off";{State-internal in RECEIVING_COMMANDS_CHANNEL_N}		Basic IO
Eu.IO.7842	Req	Cd_Set_Output_Channels[CommandedOutputStateN = Flashing AND D24in_Con_Flashing]/d3out_Required_Output_Channel_StateN := "Flashing";{State-internal in RECEIVING_COMMANDS_CHANNEL_N}		Option flashing
Eu.IO.7843	Req	Cd_Set_Output_Channels[CommandedOutputStateN = Switched_On]/d3out_Required_Output_Channel_StateN := "Switched_On";{State-internal in RECEIVING_COMMANDS_CHANNEL_N}		Basic IO
Eu.IO.7844	Req	when(d13out_Switch_Off_Each_Physical_Ouput_Channel OR d9in_Monitored_Output_Channel_Disturbance_StateN = "Physically_Disturbed")/ d3out_Required_Output_Channel_StateN := "Unknown";{RECEIVING_COMMANDS_CHANNEL_N - REQUIRED_OUTPUT_CHANNEL_N_STATE_CAN_NOT_BE_SET}		Basic IO
Eu.IO.7984	Req	[d13out_Switch_Off_Each_Physical_Ouput_Channel OR d9in_Monitored_Output_Channel_Disturbance_StateN = "Physically_Disturbed"]/ d3out_Required_Output_Channel_StateN := "Unknown";{RECEIVING_COMMANDS_CHANNEL_N - REQUIRED_OUTPUT_CHANNEL_N_STATE_CAN_NOT_BE_SET}		Basic IO
Eu.IO.7845	Info	Initial2		Basic IO
Eu.IO.7846	Req	{/Initial2 - RECEIVING_COMMANDS_CHANNEL_N}		Basic IO
Eu.IO.7847	Info	REQUIRED_OUTPUT_CHANNEL_N_STATE_CAN_NOT_BE_SET		Basic IO
Eu.IO.7848	Req	when(d9in_Monitored_Output_Channel_Disturbance_StateN = "Not_Physically_Disturbed")[Not d13out_Switch_Off_Each_Physical_Ouput_Channel]/{REQUIRED_OUTPUT_CHANNEL_N_STATE_CAN_NOT_BE_SET - RECEIVING_COMMANDS_CHANNEL_N}		Basic IO
Eu.IO.7849	Req	when(Not d13out_Switch_Off_Each_Physical_Ouput_Channel)[d9in_Monitored_Output_Channel_Disturbance_StateN = "Not_Physically_Disturbed"]/{REQUIRED_OUTPUT_CHANNEL_N_STATE_CAN_NOT_BE_SET - RECEIVING_COMMANDS_CHANNEL_N}		Basic IO
Eu.IO.7850	Req	when(d50in_PDI_Connection_State = "NOT_READY_FOR_PDI_NO_SCP" OR d50in_PDI_Connection_State = "READY_FOR_PDI_NO_SCP" OR d50in_PDI_Connection_State = "NOT_READY_FOR_PDI" OR d50in_PDI_Connection_State = "READY_FOR_PDI" OR d50in_PDI_Connection_State = "SUSPENDED")/{RECEIVING_COMMANDS - INTERFACE_CONNECTION_CLOSED}		Basic IO
Eu.IO.7486	Info	F_SCI_IO_Report		Basic IO
Eu.IO.7549	Info	[Block] F_SCI_IO_Report [Functional Viewpoint - Interface Requirements - Functional Entity] <div style="border: 1px solid black; padding: 5px; margin: 5px 0;"> ibd [Block] F_SCI_IO_Report [Functional Viewpoint - Interface Requirements - Functional Entity] <div style="background-color: #00FF00; padding: 5px; margin: 5px 0;"> «functional entity» F_SCI_IO_Report values «BlockProperty» Mem_Last_Reported_Input_Channel_State1 : String «BlockProperty» Mem_Last_Reported_Input_Channel_StateN : String «BlockProperty» Mem_Last_Reported_Output_Channel_State1 : String «BlockProperty» Mem_Last_Reported_Output_Channel_StateN : String Operation «Operation» cOp1_Initial_Report_Status_Ouput_Channel_States (in Output_Channel_State1 : String, in Output_Channel_StateN : String) «Operation» cOp2_Initial_Report_Status_Input_Channel_States (in Input_Channel_State1 : String, in Input_Channel_StateN : String) </div> <div style="margin: 5px 0;"> P20out : SCI_IO_2 d9in_Monitored_Output_Channel_Disturbance_State1 : String ← d9in_Monitored_Output_Channel_Disturbance_StateN : String ← d50in_PDI_Connection_State : String → d7in_Detected_Input_Channel_State1 : String ← p3inout : F_SCI_Specific d7in_Detected_Input_Channel_StateN : String ← </div> </div>		Basic IO
Eu.IO.7540	Info	d50in_PDI_Connection_State		Basic IO
Eu.IO.7535	Info	d7in_Detected_Input_Channel_State1		Basic IO
Eu.IO.7895	Info	d7in_Detected_Input_Channel_StateN		Basic IO
Eu.IO.7539	Info	d9in_Monitored_Output_Channel_Disturbance_State1		Basic IO
Eu.IO.7896	Info	d9in_Monitored_Output_Channel_Disturbance_StateN		Basic IO
Eu.IO.7894	Info	P20out	The port P20out exchanges information objects according to SCI_IO_2.	Basic IO
Eu.IO.7973	Info	p3inout		Basic IO

ID	Type	Requirement Part 1	Requirement Part 2	Func. Pkg.
Eu.IO.7890	Info	<pre> if Output_Channel_State1 = "Not_Physically_Disturbed" AND Output_Channel_StateN = "Not_Physically_Disturbed" then send Msg_State_Of_Output_Channels(OutputChannelDisturbanceState.Not_Physically_Disturbed,OutputChannelDisturbanceState.Not_Physically_Disturbed) to P20out; Mem_Last_Reported_Output_Channel_State1 := "Not_Physically_Disturbed"; Mem_Last_Reported_Output_Channel_StateN := "Not_Physically_Disturbed"; elseif Output_Channel_State1 = "Physically_Disturbed" AND Output_Channel_StateN = "Physically_Disturbed" then send Msg_State_Of_Output_Channels(OutputChannelDisturbanceState.Physically_Disturbed,OutputChannelDisturbanceState.Physically_Disturbed) to P20out; Mem_Last_Reported_Output_Channel_State1 := "Physically_Disturbed"; Mem_Last_Reported_Output_Channel_StateN := "Physically_Disturbed"; elseif Output_Channel_State1 = "Physically_Disturbed" AND Output_Channel_StateN = "Not_Physically_Disturbed" then send Msg_State_Of_Output_Channels(OutputChannelDisturbanceState.Physically_Disturbed,OutputChannelDisturbanceState.Not_Physically_Disturbed) to P20out; Mem_Last_Reported_Output_Channel_State1 := "Physically_Disturbed"; Mem_Last_Reported_Output_Channel_StateN := "Not_Physically_Disturbed"; elseif Output_Channel_State1 = "Not_Physically_Disturbed" AND Output_Channel_StateN = "Physically_Disturbed" then send Msg_State_Of_Output_Channels(OutputChannelDisturbanceState.Not_Physically_Disturbed,OutputChannelDisturbanceState.Physically_Disturbed) to P20out; Mem_Last_Reported_Output_Channel_State1 := "Not_Physically_Disturbed"; Mem_Last_Reported_Output_Channel_StateN := "Physically_Disturbed"; end if </pre>	cOp1_Initial_Report_Status_Ouput_Channel_States	Basic IO
Eu.IO.7892	Info	<pre> if Input_Channel_State1 = "Switched_On" AND Input_Channel_StateN = "Switched_On" then send Msg_State_Of_Input_Channels(InputChannelState.Switched_On,InputChannelState.Switched_On) to P20out; Mem_Last_Reported_Input_Channel_State1 := "Switched_On"; Mem_Last_Reported_Input_Channel_StateN := "Switched_On"; elseif Input_Channel_State1 = "Switched_Off" AND Input_Channel_StateN = "Switched_Off" then send Msg_State_Of_Input_Channels(InputChannelState.Switched_Off,InputChannelState.Switched_Off) to P20out; Mem_Last_Reported_Input_Channel_State1 := "Switched_Off"; Mem_Last_Reported_Input_Channel_StateN := "Switched_Off"; elseif Input_Channel_State1 = "Disturbed" AND Input_Channel_StateN = "Disturbed" then send Msg_State_Of_Input_Channels(InputChannelState.Disturbed,InputChannelState.Disturbed) to P20out; Mem_Last_Reported_Input_Channel_State1 := "Disturbed"; Mem_Last_Reported_Input_Channel_StateN := "Disturbed"; elseif Input_Channel_State1 = "Switched_Off" AND Input_Channel_StateN = "Switched_On" then send Msg_State_Of_Input_Channels(InputChannelState.Switched_Off,InputChannelState.Switched_On) to P20out; Mem_Last_Reported_Input_Channel_State1 := "Switched_Off"; Mem_Last_Reported_Input_Channel_StateN := "Switched_On"; elseif Input_Channel_State1 = "Switched_On" AND Input_Channel_StateN = "Switched_Off" then send Msg_State_Of_Input_Channels(InputChannelState.Switched_On,InputChannelState.Switched_Off) to P20out; Mem_Last_Reported_Input_Channel_State1 := "Switched_On"; Mem_Last_Reported_Input_Channel_StateN := "Switched_Off"; elseif Input_Channel_State1 = "Switched_Off" AND Input_Channel_StateN = "Disturbed" then send Msg_State_Of_Input_Channels(InputChannelState.Switched_Off,InputChannelState.Disturbed) to P20out; Mem_Last_Reported_Input_Channel_State1 := "Switched_Off"; Mem_Last_Reported_Input_Channel_StateN := "Disturbed"; elseif Input_Channel_State1 = "Switched_On" AND Input_Channel_StateN = "Disturbed" then send Msg_State_Of_Input_Channels(InputChannelState.Switched_On,InputChannelState.Disturbed) to P20out; Mem_Last_Reported_Input_Channel_State1 := "Switched_On"; Mem_Last_Reported_Input_Channel_StateN := "Disturbed"; elseif Input_Channel_State1 = "Disturbed" AND Input_Channel_StateN = "Switched_Off" then send Msg_State_Of_Input_Channels(InputChannelState.Disturbed,InputChannelState.Switched_Off) to P20out; Mem_Last_Reported_Input_Channel_State1 := "Disturbed"; Mem_Last_Reported_Input_Channel_StateN := "Switched_Off"; elseif Input_Channel_State1 = "Disturbed" AND Input_Channel_StateN = "Switched_On" then send Msg_State_Of_Input_Channels(InputChannelState.Disturbed,InputChannelState.Switched_On) to P20out; Mem_Last_Reported_Input_Channel_State1 := "Disturbed"; Mem_Last_Reported_Input_Channel_StateN := "Switched_On"; end if </pre>	cOp2_Initial_Report_Status_Input_Channel_States	Basic IO
Eu.IO.7487	Info	F_SCI_IO_Report - Behaviour		Basic IO

ID	Type	Requirement Part 1	Requirement Part 2	Func. Pkg.
Eu.IO.7531	Info	<p>Functional Viewpoint - Interface Requirements - Functional Entity 2.2</p> <p>stm [State Machine] F_SCI_IO_Report - Behaviour [Functional Viewpoint - Interface Requirements - Functional Entity 2.2]</p> <pre> when(d50in_PDI_Connection_State = "NOT_READY_FOR_PDI_NO_SCP" OR d50in_PDI_Connection_State = "READY_FOR_PDI_NO_SCP" OR d50in_PDI_Connection_State = "NOT_READY_FOR_PDI" OR d50in_PDI_Connection_State = "READY_FOR_PDI" OR d50in_PDI_Connection_State = "SUSPENDED")/ </pre> <p>INTERFACE_CONNECTION_NOT_ESTABLISHED</p> <p>Initial0</p> <p>Start_Status_Report/ cOp1_Initial_Report_Status_Ouput_Channel_States (d9in_Monitored_Output_Channel_Disturbance_State1, d9in_Monitored_Output_Channel_Disturbance_StateN) ; cOp2_Initial_Report_Status_Input_Channel_States (d7in_Detected_Input_Channel_State1, d7in_Detected_Input_Channel_StateN) ;</p> <p>REPORTING_LOGICAL_CHANNEL_STATES</p> <p>Entry/send Status_Report_Completed to p3inout;</p> <p>REPORTING_LOGICAL_INPUT_CHANNEL_STATES</p> <p>Initial1</p> <pre> SENDING_INPUT_CHANNEL_REPORTS when(d50in_PDI_Connection_State = "ESTABLISHED") [d7in_Detected_Input_Channel_State1 <> Mem_Last_Reported_Input_Channel_State1 OR d7in_Detected_Input_Channel_StateN <> Mem_Last_Reported_Input_Channel_StateN] / cOp2_Initial_Report_Status_Input_Channel_States (d7in_Detected_Input_Channel_State1, d7in_Detected_Input_Channel_StateN) ; when(d7in_Detected_Input_Channel_State1 = "Switched_On" AND d7in_Detected_Input_Channel_StateN = "Switched_On") [d50in_PDI_Connection_State = "ESTABLISHED"] / send Msg_State_Of_Input_Channels (Switched_On, Switched_On) to P20out; when(d7in_Detected_Input_Channel_State1 = "Switched_Off" AND d7in_Detected_Input_Channel_StateN = "Switched_Off") [d50in_PDI_Connection_State = "ESTABLISHED"] / send Msg_State_Of_Input_Channels (Switched_Off, Switched_Off) to P20out; when(d7in_Detected_Input_Channel_State1 = "Disturbed" AND d7in_Detected_Input_Channel_StateN = "Disturbed") [d50in_PDI_Connection_State = "ESTABLISHED"] / send Msg_State_Of_Input_Channels (Disturbed, Disturbed) to P20out; when(d7in_Detected_Input_Channel_State1 = "Switched_Off" AND d7in_Detected_Input_Channel_StateN = "Switched_On") [d50in_PDI_Connection_State = "ESTABLISHED"] / send Msg_State_Of_Input_Channels (Switched_Off, Switched_On) to P20out; when(d7in_Detected_Input_Channel_State1 = "Switched_On" AND d7in_Detected_Input_Channel_StateN = "Switched_Off") [d50in_PDI_Connection_State = "ESTABLISHED"] / send Msg_State_Of_Input_Channels (Switched_On, Switched_Off) to P20out; when(d7in_Detected_Input_Channel_State1 = "Switched_Off" AND d7in_Detected_Input_Channel_StateN = "Disturbed") [d50in_PDI_Connection_State = "ESTABLISHED"] / send Msg_State_Of_Input_Channels (Switched_Off, Disturbed) to P20out; when(d7in_Detected_Input_Channel_State1 = "Switched_On" AND d7in_Detected_Input_Channel_StateN = "Disturbed") [d50in_PDI_Connection_State = "ESTABLISHED"] / send Msg_State_Of_Input_Channels (Switched_On, Disturbed) to P20out; when(d7in_Detected_Input_Channel_State1 = "Disturbed" AND d7in_Detected_Input_Channel_StateN = "Switched_Off") [d50in_PDI_Connection_State = "ESTABLISHED"] / send Msg_State_Of_Input_Channels (Disturbed, Switched_Off) to P20out; when(d7in_Detected_Input_Channel_State1 = "Disturbed" AND d7in_Detected_Input_Channel_StateN = "Switched_On") [d50in_PDI_Connection_State = "ESTABLISHED"] / send Msg_State_Of_Input_Channels (Disturbed, Switched_On) to P20out; </pre> <p>REPORTING_LOGICAL_OUTPUT_CHANNEL_STATES</p> <p>Initial2</p> <pre> SENDING_OUTPUT_CHANNEL_REPORTS when(d50in_PDI_Connection_State = "ESTABLISHED") [d9in_Monitored_Output_Channel_Disturbance_State1 <> Mem_Last_Reported_Output_Channel_State1 OR d9in_Monitored_Output_Channel_Disturbance_StateN <> Mem_Last_Reported_Output_Channel_StateN] / cOp1_Initial_Report_Status_Ouput_Channel_States (d9in_Monitored_Output_Channel_Disturbance_State1, d9in_Monitored_Output_Channel_Disturbance_StateN) ; when(d9in_Monitored_Output_Channel_Disturbance_State1 = "Not_Physically_Disturbed" AND d9in_Monitored_Output_Channel_Disturbance_StateN = "Not_Physically_Disturbed") [d50in_PDI_Connection_State = "ESTABLISHED"] / send Msg_State_Of_Output_Channels (Not_Physically_Disturbed, Not_Physically_Disturbed) to P20out; when(d9in_Monitored_Output_Channel_Disturbance_State1 = "Physically_Disturbed" AND d9in_Monitored_Output_Channel_Disturbance_StateN = "Not_Physically_Disturbed") [d50in_PDI_Connection_State = "ESTABLISHED"] / send Msg_State_Of_Output_Channels (Physically_Disturbed, Not_Physically_Disturbed) to P20out; when(d9in_Monitored_Output_Channel_Disturbance_State1 = "Not_Physically_Disturbed" AND d9in_Monitored_Output_Channel_Disturbance_StateN = "Physically_Disturbed") [d50in_PDI_Connection_State = "ESTABLISHED"] / send Msg_State_Of_Output_Channels (Not_Physically_Disturbed, Physically_Disturbed) to P20out; when(d9in_Monitored_Output_Channel_Disturbance_State1 = "Physically_Disturbed" AND d9in_Monitored_Output_Channel_Disturbance_StateN = "Physically_Disturbed") [d50in_PDI_Connection_State = "ESTABLISHED"] / send Msg_State_Of_Output_Channels (Physically_Disturbed, Physically_Disturbed) to P20out; </pre>		Basic IO
Eu.IO.7516	Info	Initial0		Basic IO
Eu.IO.7517	Req	/{Initial0 - INTERFACE_CONNECTION_NOT_ESTABLISHED}		Basic IO
Eu.IO.7859	Info	INTERFACE_CONNECTION_NOT_ESTABLISHED		Basic IO
Eu.IO.7860	Req	Start_Status_Report/ cOp1_Initial_Report_Status_Ouput_Channel_States(d9in_Monitored_Output_Channel_Disturbance_State1,d9in_Monitored_Output_Channel_Disturbance_StateN); cOp2_Initial_Report_Status_Input_Channel_States(d7in_Detected_Input_Channel_State1,d7in_Detected_Input_Channel_StateN);{INTERFACE_CONNECTION_NOT_ESTABLISHED - REPORTING_LOGICAL_CHANNEL_STATES}		Basic IO
Eu.IO.7861	Info	REPORTING_LOGICAL_CHANNEL_STATES		Basic IO
Eu.IO.7862	Info	REPORTING_LOGICAL_INPUT_CHANNEL_STATES		Basic IO

ID	Type	Requirement Part 1	Requirement Part 2	Func. Pkg.
Eu.IO.7866	Info	Initial1		Basic IO
Eu.IO.7867	Req	/{Initial1 - SENDING_INPUT_CHANNEL_REPORTS}		Basic IO
Eu.IO.7868	Info	SENDING_INPUT_CHANNEL_REPORTS		Basic IO
Eu.IO.7869	Req	when(d50in_PDI_Connection_State = "ESTABLISHED")d7in_Detected_Input_Channel_State1 <> Mem_Last_Reported_Input_Channel_State1 OR d7in_Detected_Input_Channel_StateN <> Mem_Last_Reported_Input_Channel_StateN/ cOp2_Initial_Report_Status_Input_Channel_States(d7in_Detected_Input_Channel_State1,d7in_Detected_Input_Channel_StateN);{State-internal in SENDING_INPUT_CHANNEL_REPORTS}		Basic IO
Eu.IO.7870	Req	when(d7in_Detected_Input_Channel_State1 = "Switched_Off" AND d7in_Detected_Input_Channel_StateN = "Switched_On")d50in_PDI_Connection_State = "ESTABLISHED"]/ send Msg_State_Of_Input_Channels(Switched_Off,Switched_On) to P20out;{State-internal in SENDING_INPUT_CHANNEL_REPORTS}		Basic IO
Eu.IO.7871	Req	when(d7in_Detected_Input_Channel_State1 = "Disturbed" AND d7in_Detected_Input_Channel_StateN = "Switched_Off")d50in_PDI_Connection_State = "ESTABLISHED"]/ send Msg_State_Of_Input_Channels(Disturbed,Switched_Off) to P20out;{State-internal in SENDING_INPUT_CHANNEL_REPORTS}		Basic IO
Eu.IO.7872	Req	when(d7in_Detected_Input_Channel_State1 = "Disturbed" AND d7in_Detected_Input_Channel_StateN = "Switched_On")d50in_PDI_Connection_State = "ESTABLISHED"]/ send Msg_State_Of_Input_Channels(Disturbed,Switched_On) to P20out;{State-internal in SENDING_INPUT_CHANNEL_REPORTS}		Basic IO
Eu.IO.7873	Req	when(d7in_Detected_Input_Channel_State1 = "Disturbed" AND d7in_Detected_Input_Channel_StateN = "Disturbed")d50in_PDI_Connection_State = "ESTABLISHED"]/ send Msg_State_Of_Input_Channels(Disturbed,Disturbed) to P20out;{State-internal in SENDING_INPUT_CHANNEL_REPORTS}		Basic IO
Eu.IO.7874	Req	when(d7in_Detected_Input_Channel_State1 = "Switched_Off" AND d7in_Detected_Input_Channel_StateN = "Switched_Off")d50in_PDI_Connection_State = "ESTABLISHED"]/ send Msg_State_Of_Input_Channels(Switched_Off,Switched_Off) to P20out;{State-internal in SENDING_INPUT_CHANNEL_REPORTS}		Basic IO
Eu.IO.7875	Req	when(d7in_Detected_Input_Channel_State1 = "Switched_Off" AND d7in_Detected_Input_Channel_StateN = "Disturbed")d50in_PDI_Connection_State = "ESTABLISHED"]/ send Msg_State_Of_Input_Channels(Switched_Off,Disturbed) to P20out;{State-internal in SENDING_INPUT_CHANNEL_REPORTS}		Basic IO
Eu.IO.7876	Req	when(d7in_Detected_Input_Channel_State1 = "Switched_On" AND d7in_Detected_Input_Channel_StateN = "Disturbed")d50in_PDI_Connection_State = "ESTABLISHED"]/ send Msg_State_Of_Input_Channels(Switched_On,Disturbed) to P20out;{State-internal in SENDING_INPUT_CHANNEL_REPORTS}		Basic IO
Eu.IO.7877	Req	when(d7in_Detected_Input_Channel_State1 = "Switched_On" AND d7in_Detected_Input_Channel_StateN = "Switched_On")d50in_PDI_Connection_State = "ESTABLISHED"]/ send Msg_State_Of_Input_Channels(Switched_On,Switched_On) to P20out;{State-internal in SENDING_INPUT_CHANNEL_REPORTS}		Basic IO
Eu.IO.7878	Req	when(d7in_Detected_Input_Channel_State1 = "Switched_On" AND d7in_Detected_Input_Channel_StateN = "Switched_Off")d50in_PDI_Connection_State = "ESTABLISHED"]/ send Msg_State_Of_Input_Channels(Switched_On,Switched_Off) to P20out;{State-internal in SENDING_INPUT_CHANNEL_REPORTS}		Basic IO
Eu.IO.7879	Info	REPORTING_LOGICAL_OUTPUT_CHANNEL_STATES		Basic IO
Eu.IO.7880	Info	Initial2		Basic IO
Eu.IO.7881	Req	/{Initial2 - SENDING_OUTPUT_CHANNEL_REPORTS}		Basic IO
Eu.IO.7882	Info	SENDING_OUTPUT_CHANNEL_REPORTS		Basic IO
Eu.IO.7883	Req	when(d50in_PDI_Connection_State = "ESTABLISHED")d9in_Monitored_Output_Channel_Disturbance_State1 <> Mem_Last_Reported_Output_Channel_State1 OR d9in_Monitored_Output_Channel_Disturbance_StateN <> Mem_Last_Reported_Output_Channel_StateN/ cOp1_Initial_Report_Status_Ouput_Channel_States(d9in_Monitored_Output_Channel_Disturbance_State1,d9in_Monitored_Output_Channel_Disturbance_StateN);{State-internal in SENDING_OUTPUT_CHANNEL_REPORTS}		Basic IO
Eu.IO.7884	Req	when(d9in_Monitored_Output_Channel_Disturbance_State1 = "Not_Physically_Disturbed" AND d9in_Monitored_Output_Channel_Disturbance_StateN = "Physically_Disturbed")d50in_PDI_Connection_State = "ESTABLISHED"]/ send Msg_State_Of_Output_Channels(Not_Physically_Disturbed,Physically_Disturbed) to P20out;{State-internal in SENDING_OUTPUT_CHANNEL_REPORTS}		Basic IO
Eu.IO.7885	Req	when(d9in_Monitored_Output_Channel_Disturbance_State1 = "Not_Physically_Disturbed" AND d9in_Monitored_Output_Channel_Disturbance_StateN = "Not_Physically_Disturbed")d50in_PDI_Connection_State = "ESTABLISHED"]/ send Msg_State_Of_Output_Channels(Not_Physically_Disturbed,Not_Physically_Disturbed) to P20out;{State-internal in SENDING_OUTPUT_CHANNEL_REPORTS}		Basic IO
Eu.IO.7886	Req	when(d9in_Monitored_Output_Channel_Disturbance_State1 = "Physically_Disturbed" AND d9in_Monitored_Output_Channel_Disturbance_StateN = "Physically_Disturbed")d50in_PDI_Connection_State = "ESTABLISHED"]/ send Msg_State_Of_Output_Channels(Physically_Disturbed,Physically_Disturbed) to P20out;{State-internal in SENDING_OUTPUT_CHANNEL_REPORTS}		Basic IO
Eu.IO.7887	Req	when(d9in_Monitored_Output_Channel_Disturbance_State1 = "Physically_Disturbed" AND d9in_Monitored_Output_Channel_Disturbance_StateN = "Not_Physically_Disturbed")d50in_PDI_Connection_State = "ESTABLISHED"]/ send Msg_State_Of_Output_Channels(Physically_Disturbed,Not_Physically_Disturbed) to P20out;{State-internal in SENDING_OUTPUT_CHANNEL_REPORTS}		Basic IO
Eu.IO.7889	Req	when(d50in_PDI_Connection_State = "NOT_READY_FOR_PDI_NO_SCP" OR d50in_PDI_Connection_State = "READY_FOR_PDI_NO_SCP" OR d50in_PDI_Connection_State = "NOT_READY_FOR_PDI" OR d50in_PDI_Connection_State = "READY_FOR_PDI" OR d50in_PDI_Connection_State = "SUSPENDED");{REPORTING_LOGICAL_CHANNEL_STATES - INTERFACE_CONNECTION_NOT_ESTABLISHED}		Basic IO
Eu.IO.7888	Req	entry/send Status_Report_Completed to p3inout;{State-internal in REPORTING_LOGICAL_CHANNEL_STATES}		Basic IO
Eu.IO.434	Head	3.4.2 SMI-IO (Subsystem - Maintenance and Data Management)		
Eu.IO.1695	Info	The generic InformationFlow and the related FlowProperties through the SMI-IO are specified in Eu.Doc.120.		Basic IO
Eu.IO.433	Head	3.4.3 SDI-IO (Subsystem - Maintenance and Data Management)		
Eu.IO.1694	Info	The generic data points through the SDI-IO are specified in Eu.Doc.94. The specific data points through the SDI-IO are specified in Eu.Doc.82.		Basic IO
Eu.IO.7948	Head	3.4.4 SSI-IO (Subsystem - Security Services Platform)		
Eu.IO.7949	Info	The generic content through SSI-LS is specified in Eu.Doc.117.		Basic IO
Eu.IO.409	Head	3.4.5 IO1 (Basic Data identifier)		
Eu.IO.1692	Info	The generic InformationFlow and the related FlowProperties through IO1 are specified in Eu.Doc.20.		Basic IO
Eu.IO.416	Head	3.4.6 IO5 (Maintainer)		

ID	Type	Requirement Part 1	Requirement Part 2	Func. Pkg.
Eu.IO.1784	Info	The generic FlowProperties through IO5 are specified in Eu.Doc.20.		Basic IO
Eu.IO.1205	Info	Maintainer	Definition of the InformationFlow for Maintenance/Operation/Display IO5 (Maintainer).	Basic IO
Eu.IO.1208	Req	Input_ChannelX	Displays the state for each respective physical Input Channel (X > 0).	Basic IO
Eu.IO.1210	Req	Output_ChannelX	Displays the state for each respective physical Output Channel (X > 0).	Basic IO
Eu.IO.410	Head	3.4.7 IO2 (Adjacent IO Systems)		
Eu.IO.411	Info	Adjacent_IO_Systems_O	Definition of the InformationFlow for Control Interface IO2 (Adjacent IO System) (Output Channels).	Basic IO
Eu.IO.412	Req	Set_Output_Channels	Currently set state of the physical Output Channels (Switched On, Switched Off) in Subsystem - Generic IO as a permanent available information.	Basic IO
Eu.IO.413	Head	3.4.8 IO3 (Adjacent IO Systems)		
Eu.IO.414	Info	Adjacent_IO_Systems_I	Definition of the InformationFlow for Control Interface IO3 (Adjacent IO System) (Input Channels).	Basic IO
Eu.IO.415	Req	State_Input_Channels	Current state of the physical Input Channels (Switched On, Switched Off, Disturbed) in Adjacent IO System as a permanent available information.	Basic IO
Eu.IO.185	Head	4 RAMSS Requirements		
Eu.IO.1606	Info	The requirements for reliability, availability, maintainability, safety and security are specified in [Eu.Doc.20].		Basic IO
Eu.IO.199	Head	5 Technical requirements		
Eu.IO.1533	Info	The generic technical requirements are specified in [Eu.Doc.20].		Basic IO
Eu.IO.1422	Head	5.1 Specific technical interface requirements		
Eu.IO.1423	Head	5.1.1 Interface to the Point of Service Signalling (PoS-Signalling)		
Eu.IO.1424	Req	Via the technical interface PoS-Signalling the data of the functional interface "SCI-IO" shall be exchanged with the Subsystem - Electronic Interlocking as specified in [Eu.Doc.92].		Basic IO
Eu.IO.1425	Req	Via the technical interface PoS-Signalling the data of the functional interface "SMI-IO" shall be exchanged with the Subsystem - Maintenance and Data Management as specified in [Eu.Doc.76].		Basic IO
Eu.IO.1426	Req	Via the technical interface PoS-Signalling the data of the functional interface "SDI-IO" shall be exchanged with the Subsystem - Maintenance and Data Management as specified in [Eu.Doc.77].		Basic IO
Eu.IO.7986	Req	Via the technical interface PoS-Signalling the data of the functional interface "SSI-IO" shall be exchanged with the Subsystem - Security Services Platform as specified in [Eu.Doc.117].		Basic IO
Eu.IO.1463	Head	5.1.2 Interfaces to Adjacent IO System		
Eu.IO.1621	Req	The Adjacent IO System is connected to the Subsystem - Generic IO via the technical interfaces IO2 and IO3.		Basic IO
Eu.IO.1622	Req	If the Subsystem - Generic IO provides Input Channels, at least 8 physical Input Channels shall be provided by it.		Basic IO
Eu.IO.1623	Req	These 8 physical Input Channels shall be configurable into 4 or more logical Input Channels.		Basic IO
Eu.IO.1624	Req	If the Subsystem - Generic IO provides Output Channels, at least 8 physical Output Channels shall be provided by it.		Basic IO
Eu.IO.1625	Req	These 8 physical Output Channels shall be configurable into 4 or more logical Output Channels.		Basic IO
Eu.IO.1626	Req	The input types "Antivalent input" and "Equivalent input" shall be implemented with two physical Input Channels.		Basic IO
Eu.IO.1627	Req	The output types "Antivalent output" and "Equivalent output" shall be implemented with two physical Output Channels.		Basic IO
Eu.IO.1628	Req	During the evaluation of an Input Channel, the configured so-called individual "Debouncing time" (see ID Eu.IO.1288) shall be waited separately for switching on and switching off before the monitored state change is evaluated as valid and then reported.		Basic IO
Eu.IO.1629	Req	For Input Channels the message to the Subsystem - Electronic Interlocking about the current state shall be delayed for a configurable time duration ("message delay time", see Eu.IO.1282) calculated from the time of the change and separate for the messages "Switched On" and "Switched Off". <i>Note: Disturbed-messages always shall be sent without waiting for the message delay time.</i>		Basic IO
Eu.IO.1630	Req	For Output Channels the switching commanded by the Subsystem - Electronic Interlocking shall be delayed for a configurable time duration ("activation delay time", see Eu.IO.1281) calculated from the time of receiving the command and separate for the commands "Switched On" and "Switched Off". <i>Note: It is advised to not set an "activation delay time" (value 0 ms) for channels that can be commanded to the state Flashing.</i>		Basic IO
Eu.IO.1631	Info	It shall be possible to connect an Adjacent IO System to different Subsystem - Generic IO, if the needed amount of Input Channels and Output Channels cannot be offered by a single Subsystem - Generic IO.		Basic IO
Eu.IO.1632	Req	Output Channels dependent in time shall always be connected to the same Subsystem - Generic IO.		Basic IO
Eu.IO.1633	Req	Input Channels dependent in time shall always be connected to the same Subsystem - Generic IO.		Basic IO
Eu.IO.1534	Head	5.1.3 Examples for wiring schemes of Adjacent IO Systems		
Eu.IO.1535	Info	These examples shall be defined by national specifications. <i>Note: In future phases of the System Pillar, national specifications will be replaced by harmonised specifications.</i>		Basic IO
Eu.IO.1545	Head	5.2 Time behaviour		
Eu.IO.1546	Req	The time values defined in the chapter Functional requirements specification (ID Eu.IO.1279) shall be configured of the operation for the Subsystem - Generic IO.		Basic IO

ID	Type	Requirement Part 1	Requirement Part 2	Func. Pkg.
Eu.IO.1547	Head	5.2.1 Response times		
Eu.IO.1548	Req	The Subsystem – Generic IO shall send the corresponding message telegram to the Subsystem - Electronic Interlocking within 500 ms after successful change of state, according to the specified UseCases.		Basic IO
Eu.IO.1549	Req	The Subsystem – Generic IO shall switch the output at the IO2 interface within 300 ms after receiving a command telegram and expiry of all delay times.		Basic IO
Eu.IO.1550	Head	5.3 Configuration and engineering data		
Eu.IO.1565	Head	5.3.1 Specific data		
Eu.IO.7608	Info	The specific configuration and engineering data for the Subsystem – Generic IO shall include as a minimum the following information: Note: This data applies to all Adjacent IO Systems (i.e. all applications).		Basic IO
Eu.IO.1567	Req	<ul style="list-style-type: none"> The connected Adjacent IO Systems which are connected to a Subsystem - Generic IO. 		Basic IO
Eu.IO.7609	Req	<ul style="list-style-type: none"> For each Input Channel the assigned Adjacent IO System and the assigned type (Antivalent, Equivalent, Single). 		Basic IO
Eu.IO.7610	Req	<ul style="list-style-type: none"> For each Output Channel the assigned Adjacent IO System and the assigned type (Antivalent, Equivalent, Single). 		Basic IO
Eu.IO.1569	Req	<ul style="list-style-type: none"> For each logical Output Channel, whether its physical output states shall be monitored. <i>Note: This monitoring only serves to report the technical failure of the Output Channel. If for a specific application a fail-safe supervision is required, an Input Channel shall be used for confirming the activation of the output.</i> 		Basic IO
Eu.IO.8048	Req	<ul style="list-style-type: none"> For each Output Channel, the Con_t_Activation_Delay_On and Con_t_Activation_Delay_Off. 		Basic IO
Eu.IO.7612	Req	<ul style="list-style-type: none"> For each Input Channel the Con_t_Message_Delay_Time_On and Con_t_Message_Delay_Time_Off. 		Basic IO
Eu.IO.8049	Req	<ul style="list-style-type: none"> For each Input Channel the Con_tmax_Switching_Period. 		Basic IO
Eu.IO.8050	Req	<ul style="list-style-type: none"> For each Input Channel the Con_t_Debouncing_Time. 		Basic IO
Eu.IO.7979	Req	<ul style="list-style-type: none"> For each Output Channel, whether it can be commanded to the state Flashing the applicable duty cycle for Flashing. 		Option flashing
Eu.IO.7950	Req	<ul style="list-style-type: none"> For each Subsystem – Generic IO, the applicable Flashing period. 		Option flashing
Eu.IO.629	Req	In the engineering data it shall be defined for the Subsystem - Generic IO whether during the disturbance of an Output Channel either only the physical Output Channels of the affected logical Output Channel or all physical Output Channels of the Adjacent IO System concerned (as far as possible given the disturbance) are Switched Off.		Basic IO
Eu.IO.7613	Info	Two different data sections can be loaded which are the safety-relevant data and the non safety-relevant data. The following definitions apply to the assignment of the sections:		Basic IO
Eu.IO.1560	Req	<ul style="list-style-type: none"> The configuration data, such as the IP addresses of the Subsystem - Electronic Interlocking, the value of the diagnostic data points with attribute type 'configuration', is non safety-relevant. This data shall be used to calculate the CSNS. 		Basic IO
Eu.IO.1561	Req	<ul style="list-style-type: none"> The remaining configuration data is currently categorised as safety-relevant. This data shall be used to calculate the CSS. 		Basic IO
Eu.IO.1562	Req	<ul style="list-style-type: none"> The engineering data is safety-relevant. This data shall be used to calculate the CSS. 		Basic IO