




ERJU SYSTEM PILLAR

TCCS - Data Model_10_INFRA



TCCS - Data Model_10_INFRA

Author(s)	Wegele, Stefan (SMO RI ML ADC I&C) , Harish Narayanan , Olatunji-Felix Ajala -Extern
Abstract	This document delivers the infrastructure description as the base for the CCS/TMS data model (from TCCS SD1) for all relevant domains needing infrastructure data in System Pillar
Config Item	
Document ID	CCS_TMS Data Model/TCCS - Data Model_10_INFRA#712641  TCCS - Data Model_10_INFRA
Classification	Public
Status	In Review by System Pillar
Version	1.2
Revision	712641
Last Change Date	23.09.2025
Copyright	Brussels: Europe's Rail Joint Undertaking, 2025

© Europe's Rail Joint Undertaking, 2025

This document is drafted by and belongs to EU Rail.

EU Rail encourages the distribution and re-use of this document, the technical specifications and the information it contains. EU Rail holds several intellectual property rights, such as copyright and trade mark rights, which need to be considered when this document is used.

EU Rail authorizes you to re-publish, re-use, copy and store this document without changing it, provided that you indicate its source and include the following: EU Rail trade mark, title of the document, year of publication, version of document.

EU Rail makes no representation or warranty as to the accuracy or completeness of the information contained within these documents. EU Rail shall have no liability to any party as a result of the use of the information contained herein. EU Rail will have no liability whatsoever for any indirect or consequential loss or damage, and any such liability is expressly excluded.

You may study, research, implement, adapt, improve and otherwise use the information, the content and the models in this document for your own purposes. If you decide to publish or disclose any adapted, modified or improved version of this document, any amended implementation or derivative work, then you must indicate that you have modified this document, with a reference to the document name and the terms of use of this document. You may not use EU Rail's trade marks or name in any way that may state or suggest, directly or indirectly, that EU Rail is the author of your adaptations.

EU Rail cannot be held responsible for your product, even if you have used this document and its content. It is your responsibility to verify the quality, completeness and the accuracy of the information you use, for your own purposes.

This work is currently a work in progress. The content presented is subject to change as it undergoes further review, refinement, and development. Please do not consider this version as final or authoritative.

INFO: History table is not displayed, because this document is in status **doc_contentApproval**.

RULE: History table is not displayed, in statuses: { draft doc_open doc_inprogress doc_contentApproval doc_contentDecision }

CONTACT: For more information contact Administrator

1 Table of Contents

1 Table of Contents	3
2 Package "Infrastructure"	4
2.1 Header	4
2.2 Track Topology	4
2.2.1 Design decisions	4
2.2.2 Topology	4
2.2.2.1 Linking Areas	8
2.2.3 Supporting containers	9
2.2.3.1 Topological coordinate	9
2.2.3.2 Linear Element Section	11
2.2.3.3 NetLinearReference (Linked path)	13
2.2.3.4 NetAreaReference (Track Area)	14
2.3 Track Geometry	15
2.3.1 Track Edge Geometry	16
2.3.1.1 Input models / references	16
2.3.1.2 Design decisions	16
2.3.2 Linear Element Sampled Geometry	25
2.3.2.1 Input models / References	25
2.3.2.2 Design Decisions	25
2.4 Switch, Crossing, Derailer	30
2.4.1 Design Decisions	31
2.5 Balise (Group)	36
2.5.1 Example for balise group	38
2.6 Track Properties	38
2.7 Track usage area	44
2.8 Speed Profiles	45
2.8.1 Applicable direction	50
2.9 ETCS Marker	51
2.10 Stop Location	52
2.11 Platform	54
2.12 Operational Point	56
2.13 Timing Point	59
2.14 Tunnel	61
2.15 Bridge	63
2.16 Underpass	63
2.17 Track Vacancy Proving Section (TVPS)	64
2.18 Level Crossing	66
2.19 National border	67
2.20 Buffer Stop	69
2.21 Container for functional objects	70

2 Package "Infrastructure"

2.1 Header

```
SPT2TS-122296 - {
"$schema": "ERJU meta-model.json",
"isDefinedBy": "http://ERJU/datamodel/1.3/infrastructure",
"name": "infrastructure",
"containerStruct": "Infrastructure",
"prefix": "infra",
"intId": 1,
"version": "1.3",
"info": "Railway network topology and topography, position wrt topology, location on a map, geometry, aka.
alignment",
"structs": [], "enums": []
} [🔗 Open]
```

2.2 Track Topology

SPT2TS-122297 - The railway system's determining feature is the network of connected tracks. The railway network topology is defined by the tracks and the connections that allow trains to travel from one track to the next. [🔗 Content to be approved]

2.2.1 Design decisions

SPT2TS-49043 - The topology shall be clustered into so-called 'TopoArea(s)' where in subsets of track topologies are defined. This clustering allows high flexibility while handling infrastructure data for the consuming systems. For instance, a Traffic Management System responsible for three different interlockings can require several topo areas to handle operations in comparison to the topo area requirement for the interlockings. Hence, it also offers a great deal of data separation in terms of identifying relevant areas for consuming systems. [🔗 Content to be approved]

SPT2TS-49041 - The track edges shall be defined with implicit orientation direction from start to end based on their length. This implicit definition improves the understanding of track edge definition in the model and paves as a smoother way for the specification of track edge links. [🔗 Content to be approved]

SPT2TS-49040 - The track nodes are omitted from the SD1 data model since the information provided by this model element (e.g., start and end of track edge, track navigability) can be sufficiently covered by other existing model elements (e.g., Track Edge and Track Edge Links) in the SD1 Model. Hence, it was ruled out on the grounds of redundancy and optimisation of the data volume of the model. For more information in Track Nodes, see 📄 SPT2TS-7 - RCA Digital Map – MAP Object Catalogue [RCA.Doc.69] [🔗 Content to be approved]

2.2.2 Topology

SPT2TS-49039 - Topo Area: A topo area is a container for rail network topology to manage (e.g. publish) parts of the infrastructure. This lets user agree on subsets of topology that is of concern to their particular use case. Its purpose is to contain subset(s) of the network topology. Topo areas consist of a list of track edges along with track edge links. [🔗 Content to be approved]

SPT2TS-49010 - LinearElement: Linear element is a linear object that defines an uninterrupted stretch of a railway track without divergence or convergence. A linear element is defined along the centre line of the 2D or 3D track alignment and has a finite length. A LinearElement is associated with NetRelation to determine navigabilities between linear elements.

The linear elements have an implicit direction. This direction is defined with respect to their start and end locations. The default orientation direction is start to end. The start of track edge is identified as the point where length is 0 and the end of track edge is identified as the point where length is maximum. The

maximum length is given by the parameter 'length' in LinearElement class. The start/end of linear element shall correspond to the location of a simple point (switch), or any form of end of track. The start/end of linear element corresponds to the tangent/secant point or the geometric start location of a simple point.

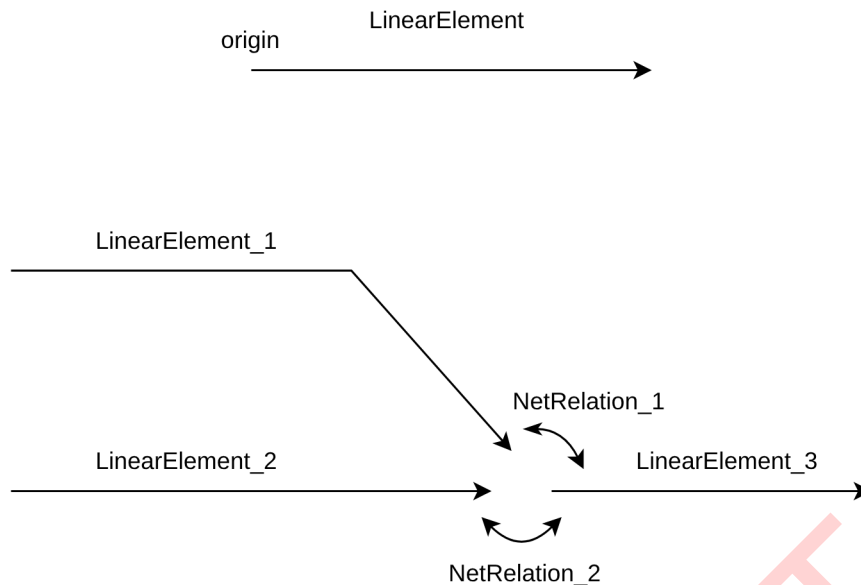



Figure 1 Topological representation of Track Edge

The following equivalent classes from other models can be referred to:


- LinearNetElement, or LinearElementWithLength at MICRO Level (the term "NetElement" is avoided to support comprehensibility and to meet SPT2TS-154) in SPT2TS-10 - RSM - RailSystemModel
- SPT2TS-9 - LinX4Rail CDM ->PSM (Platform Specific Data Model)
- LinearNetElement in SPT2TS-8 - EULYNX Data Model (dataprep.eulynx.eu)
- Track Edge in SPT2TS-7 - RCA Digital Map – MAP Object Catalogue [RCA.Doc.69]
- LinearElement in ERA vocabulary

[ Open]

SPT2TS-49008 - NetRelation: NetRelation defines a relation between two linear elements along which a train can run. NetRelations determine which travel options are permitted at points and which are excluded. They are necessary to eliminate the physically impossible train movements (e.g. a movement from the left to the right branch of a point). A turn table can be modelled as well and would be added to the model as a functional element as soon as requirements for it are provided.

The following equivalent classes from other models can be referred to:

- Positioned Relation in SPT2TS-10 - RSM - RailSystemModel
- Track Navigability in SPT2TS-7 - RCA Digital Map – MAP Object Catalogue [RCA.Doc.69]
- Net relation SPT2TS-9 - LinX4Rail CDM ->PSM (Platform Specific Data Model)

[ Open]

SPT2TS-49006 -

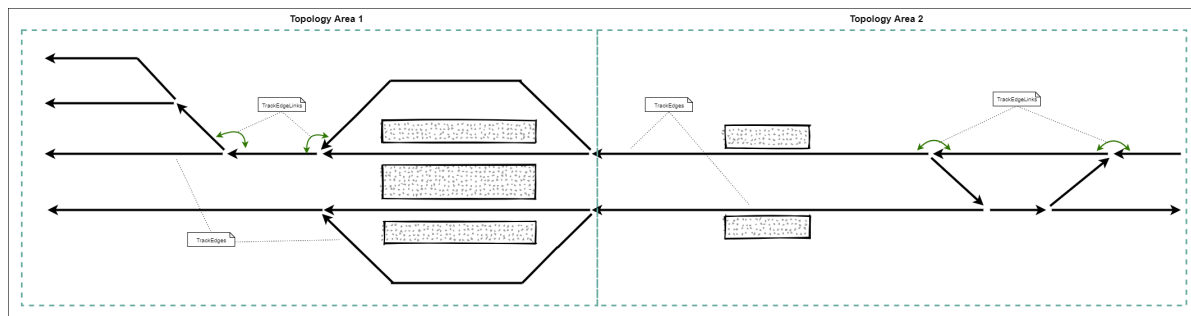


Figure 2 Representation of Topo area

Note: The purpose of the above illustration is only to portray a Topo area. It does not implicate any requirements on how the Topo areas are defined. [➡ Open]

SPMS-7462 - TopoArea

Defines a container for rail network topology

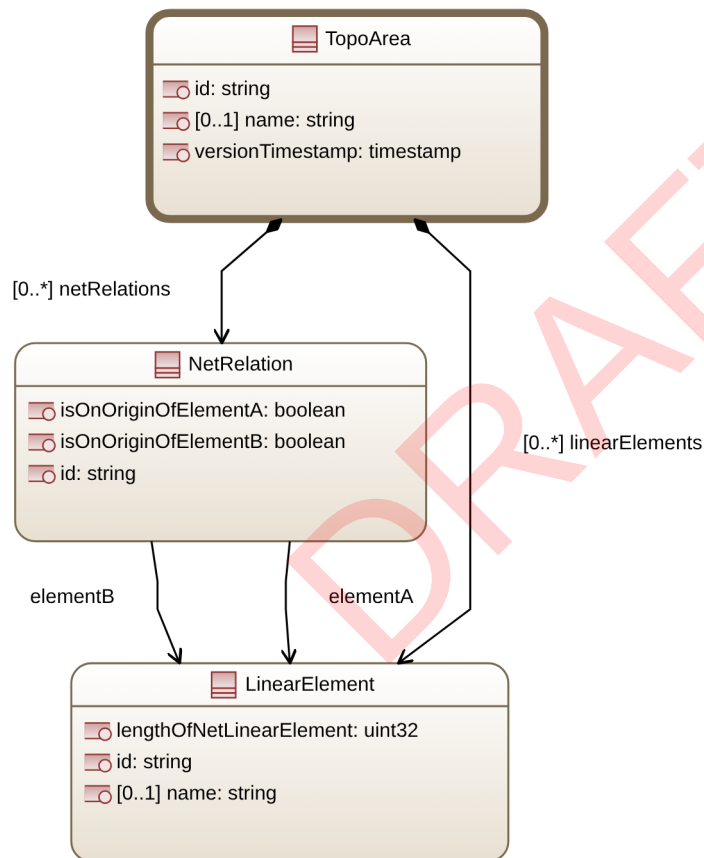


Figure 3 Tree View of TopoArea

SPT2TS-125434 - TopoArea

```
{
  "structs": [
    {
      "name": "TopoArea",
      "info": "Defines a container for rail network topology",
      "belongsToSubPackage": "topology",
```

```

"attrs": [
  {"intId": 1, "name": "id", "dataType": "string", "key": "global", "info": "Identity of the object; used for referencing"},
  {"intId": 2, "name": "versionTimestamp", "dataType": "timestamp", "info": "version information which is valid since timestamp"},
  {"intId": 3, "name": "linearElements", "composition": "LinearElement", "multiplicity": "0..*", "ordered": "byKey", "info": "composes of linear elements = Edges in the graph"},
  {"intId": 4, "name": "netRelations", "composition": "NetRelation", "multiplicity": "0..*", "ordered": "byKey", "info": "composes of net relations = links between edges in the graph"},
  {"intId": 5, "name": "name", "dataType": "string", "info": "User-friendly name, only if different from id", "multiplicity": "0..1"}
]
}
}
} []

```

SPT2TS-49005 - LinearElement

```

{
  "structs": [
    {
      "name": "LinearElement",
      "info": "A linear element is an uninterrupted stretch of railway track, without divergence or convergence.",
      "belongsToSubPackage": "topology",
      "ontology": {"subClassOf": "http://data.europa.eu/949/NetElement"},
      "attrs": [
        {"intId": 1, "name": "id", "dataType": "string", "key": "global", "info": "Identity of the object; used for referencing"},
        {"intId": 2, "name": "lengthOfNetLinearElement", "dataType": "uint32", "unit": "m", "exp": -3, "info": "Defines the distance along the LinearElement's track centre line. ", "ontology": {"subPropertyOf": "http://data.europa.eu/949/length"}},
        {"intId": 3, "name": "name", "dataType": "string", "info": "User-friendly name, only if different from id", "multiplicity": "0..1"}
      ]
    }
  ]
} []

```

SPT2TS-125424 - NetRelation

```

{
  "structs": [
    {
      "name": "NetRelation",
      "info": "Defines a relation between two elements.",
      "belongsToSubPackage": "topology",
      "attrs": [
        {"intId": 1, "name": "id", "dataType": "string", "key": "global", "info": "Identity of the object; used for referencing"},

```

```
{ "intId": 2, "name": "elementA", "reference": "LinearElement", "info": "References the first linear
element in an oriented relation."},
{ "intId": 3, "name": "elementB", "reference": "LinearElement", "info": "References the second linear
element in an oriented relation."},
{ "intId": 4, "name": "isOnOriginOfElementA", "dataType": "boolean", "info": "Determines if the
position of the topological element A in a relation is the origin of element A."},
{ "intId": 5, "name": "isOnOriginOfElementB", "dataType": "boolean", "info": "Determines if the
position of the topological element B in a relation is the origin of element B."}
]
}}
}[]
```

2.2.2.1 Linking Areas

SPT2TS-123555 - From the model point of view the linking of two areas happens by using TrackEdgeLinks referencing TrackEdge of the neighbour Area.


Figure 4 Linking areas

The json-serialisation for this example would be for the "Infrastructure"-object

```
{
  "topoAreas": [
    {
      "id": "Area51",
      "linearElements": [
        { "id": "linearElement_A", "length": 10000 }
      ],
      "netRelations": [
        { "id": "link_1", "elementA": "linearElement_A", "elementB": "/1/1[Area52]/2[linearElement_B]",
          "isOnOriginOfElementA": true, "isOnOriginOfElementB": false }
      ]
    },
    {
      "id": "Area52",
      "linearElements": [
        { "id": "linearElement_B", "length": 10000 }
      ],
      "netRelations": [
        { "id": "link_2", "elementA": "linearElement_B", "elementB": "/1/1[Area51]/2[linearElement_A]",
          "isOnOriginOfElementA": false, "isOnOriginOfElementB": true }
      ]
    }
  ]
}
```

As visible from the example, the linking between LinearElements is done twice by two NetRelation-objects. This allows bi-directional navigation and does not introduce any implications on distance-calculation, as the NetRelation has zero length.

Also, the referenced LinearElements from another TopoArea must be referenced with an absolute reference (see [SPT2TS-122407 - Referencing objects](#)).

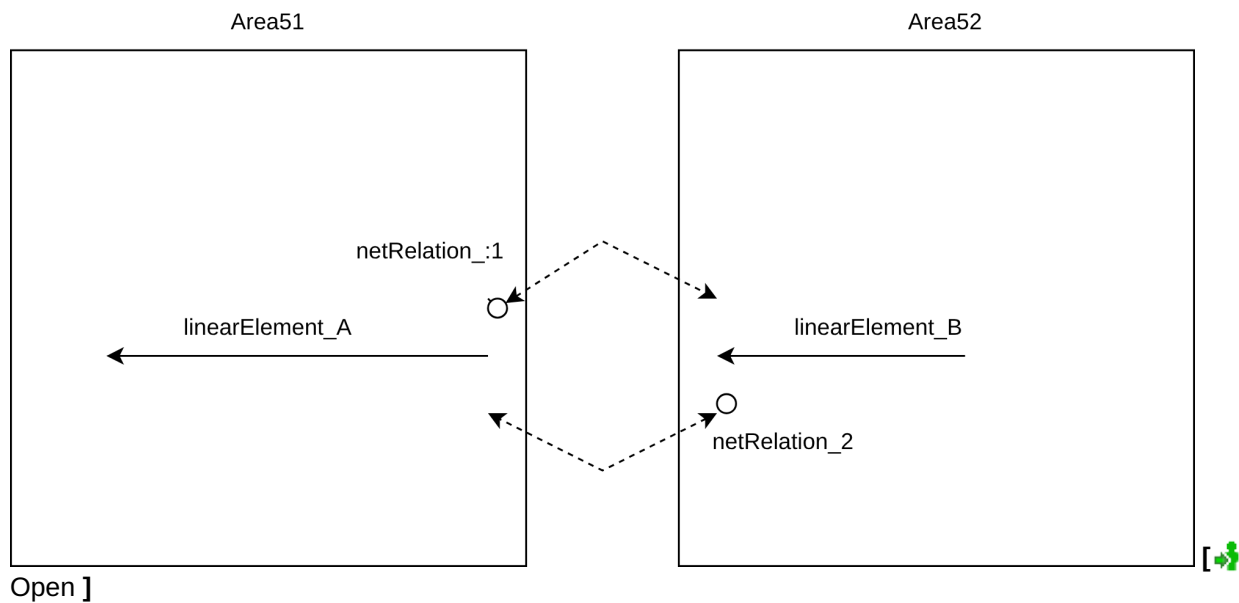

2.2.3 Supporting containers

Supporting classes are used only as containers for a set of attributes. They don't contain sufficient information on their own, they don't have an ID and cannot be referenced.

2.2.3.1 Topological coordinate

SPT2TS-63854 - A TopologicalCoordinate is a simple supporting container for two attributes: LinearElement-reference and position on it. It does not have an ID and is used only in a composition relation. In most cases a functional object needs only one position-definition (e.g. a Balise). In this cases two separate attributes (trackEdge and pos) are used. In seldom cases an object needs more than one position (e.g. Crossing needs two positions). In this case an array of two TopologicalCoordinates is used.


Figure 5 Illustration of Track Edge Point

Although the TopologicalCoordinate contains similar information as:

- Spot Location in  SPT2TS-10 - RSM - RailSystemModel
- Track Edge Point in  SPT2TS-7 - RCA Digital Map – MAP Object Catalogue [RCA.Doc.69]

Its usage is different. In both upper models, the spot locations are defined separately and then used in objects by reference via IDs. Therefore, in both cases, the objects (RSM.SpotLocation and RCA.TrackEdgePoint) use an ID attribute. In this model this level of indirection is avoided, the

TopologicalCoordinate cannot be referenced and used directly in a composition relation.

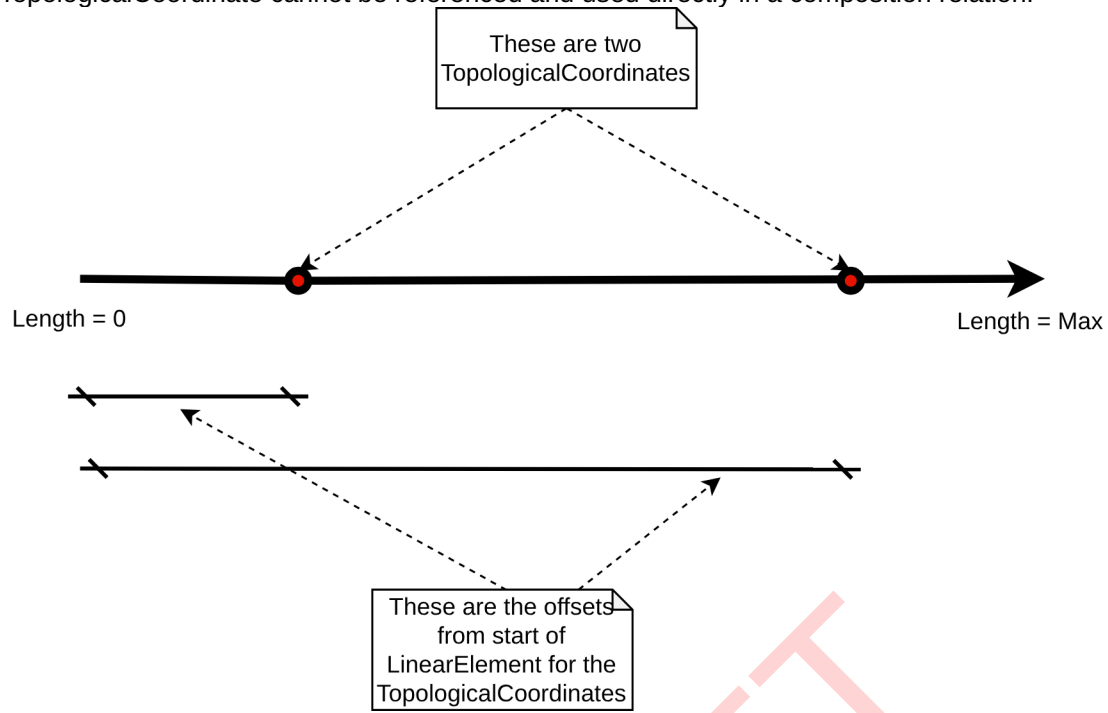

[ Open]

SPMS-7466 - NetPointReference

Represents a point reference in the network.

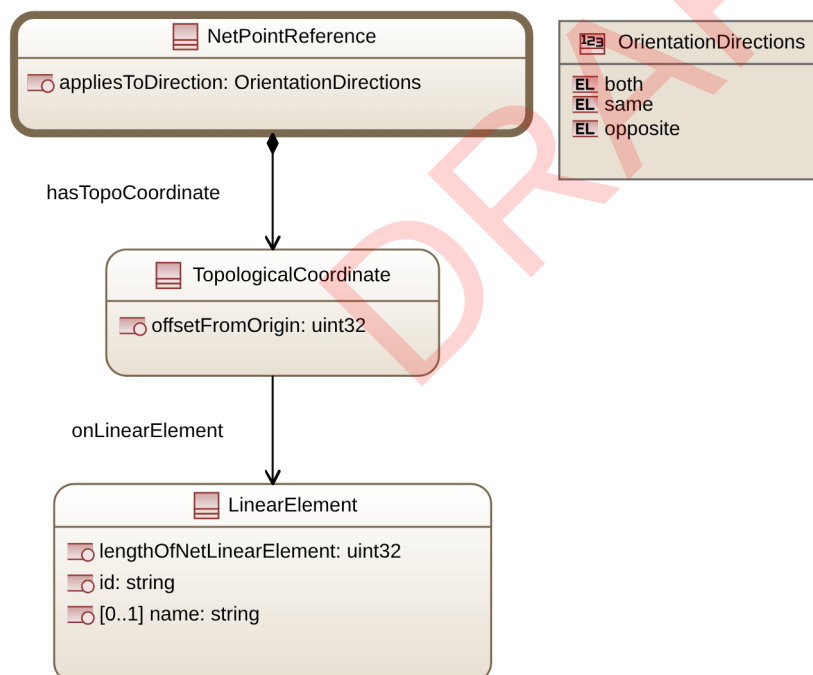


Figure 6 Tree View of NetPointReference

SPT2TS-125436 - NetPointReference

```

{
  "structs": [
    {
      "name": "NetPointReference",
      "info": "Represents a point reference in the network.",
    }
  ]
}
  
```

```

"belongsToSubPackage": "FunctionalArea",
"attrs": [
{"intId": 1, "name": "hasTopoCoordinate", "composition": "TopologicalCoordinate", "info": "Defines the
topological coordinate of a network point reference"},
{"intId": 2, "name": "appliesToDirection", "enumType": "OrientationDirections", "info": "The direction relative
to the origin of the linear element towards the point reference applies"}
]
},
"enums": [
{
"name": "OrientationDirections",
"info": "Defines, in which direction the container object is active",
"enumLiterals": [
{"intId": 0, "name": "both", "info": "active in both directions"},
{"intId": 1, "name": "same", "info": "in the same direction as the linearElement"},
{"intId": 2, "name": "opposite", "info": "in the opposite direction as the linearElement"}
]
}
]
} []

```

SPT2TS-49079 - TopologicalCoordinate

```

{
"structs": [
{
"name": "TopologicalCoordinate",
"info": "Defines a topological coordinate on the track",
"belongsToSubPackage": "FunctionalArea",
"attrs": [
{"intId": 1, "name": "onLinearElement", "reference": "LinearElement", "info": "is positioned on linear
element"},
{"intId": 2, "name": "offsetFromOrigin", "dataType": "uint32", "unit": "m", "exp": -3, "info": "position on the
associated NetElement"}
]
}
]
} []

```

2.2.3.2 Linear Element Section



SPT2TS-63855 - A Linear Element Section is a simple container for three attributes defining part of a LinearElement. It is used by other objects as supporting data-object (e.g. TrackEdgeGauges). Linear Element Sections have reference points defined to indicate their start and end locations. The reference points are defined using distance skips from start and end of linear elements. The starting/ending point is calculated as a distance increment/decrement from start/end of linear element respectively. Linear Element Section is always limited to one linear element i.e., they cannot be defined over multiple linear elements.


Figure 7 Illustration of Track Edge Section

The following similar classes from other models can be referred to:

- Track Edge Section in  SPT2TS-7 - RCA Digital Map – MAP Object Catalogue [RCA.Doc.69]


In RCA the TrackEdgeSection is a referenceable object having an ID. It could be defined in a separate container and then re-used in different objects by reference. In this model it is not possible - the `infra.LinearElementSection` can be used only in a composition relation. When the use case is to define areas (e.g., a contiguous track area or track area) use track edge sections as an attribute with 1..*

multiplicity as in  SPT2TS-12698 - TvpSection or  SPT2TS-123558 - Track Properties .

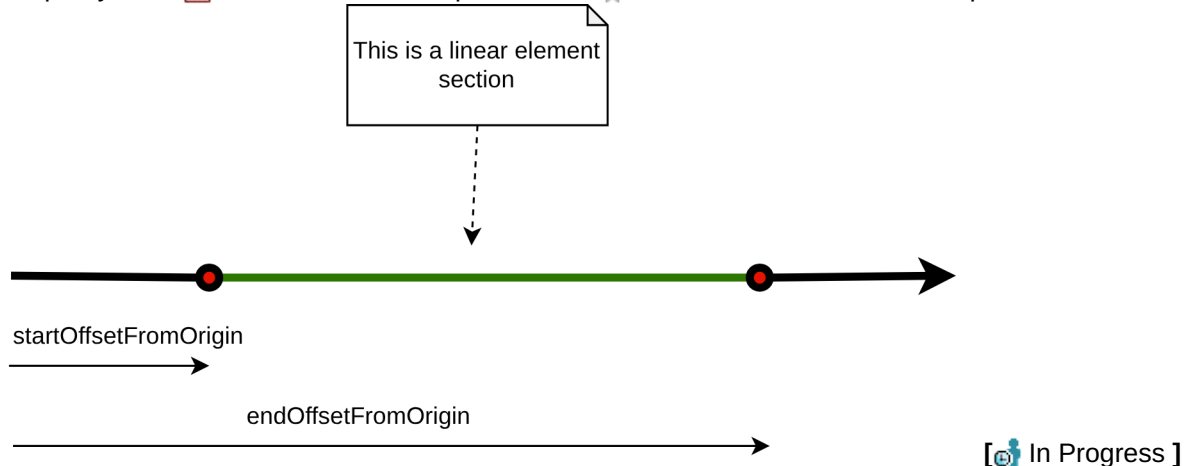

SPMS-7467 - LinearElementSection

Defines a directed linear object (with a linear extension) located on a LinearElement

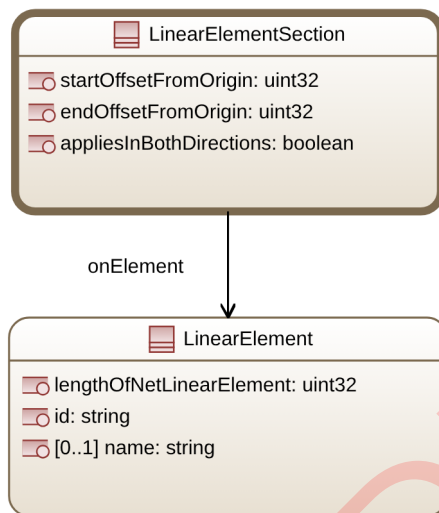

[
Figure 8 Tree View of LinearElementSection
]

SPT2TS-131398 - LinearElementSection

```

{
  "structs": [
    {
      "name": "LinearElementSection",
      "info": "Defines a directed linear object (with a linear extension) located on a LinearElement",
      "belongsToSubPackage": "FunctionalArea",
      "attrs": [
        { "intId": 1, "name": "onElement", "reference": "LinearElement", "info": "refers to linear element" },
        { "intId": 2, "name": "startOffsetFromOrigin", "dataType": "uint32", "unit": "m", "exp": -3, "info": "Defines the start offset from the origin" },
        { "intId": 3, "name": "endOffsetFromOrigin", "dataType": "uint32", "unit": "m", "exp": -3, "info": "Defines the end offset from the origin" },
        { "intId": 4, "name": "appliesInBothDirections", "dataType": "boolean", "info": "Defines if the section applies in both directions" }
      ]
    }
  ]
}
  
```



```

}}
}[]

```

2.2.3.3 NetLinearReference (Linked path)

SPT2TS-63856 - Net Linear Reference defines a continuous path between two given reference points through different interconnected linear elements. The reference points are defined using TopologicalCoordinates. The NetLinearReference is only a container for directed edges, so it does not have an id and is used in other packages in composition-attributes.

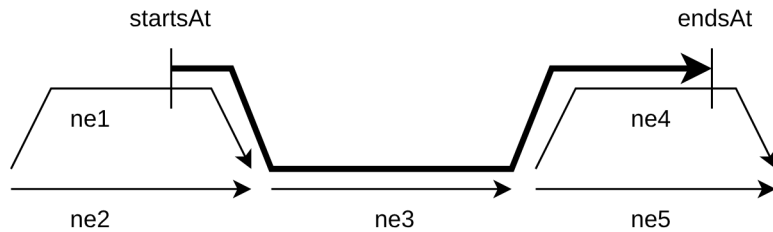





Figure 9 Illustration of Linked Path

The following equivalent classes from other models can be referred to:

- Linked path  SPT2TS-9 - LinX4Rail CDM ->PSM (Platform Specific Data Model)
- Linear Contiguous Track Area in  SPT2TS-7 - RCA Digital Map – MAP Object Catalogue [RCA.Doc.69]
- Linear Location in  SPT2TS-10 - RSM - RailSystemModel


In opposite to RCA and RSM the LinkedPath is not referenceable.

```

{
  "startsAt": {"onLinearElement": "ne1", "offsetFromOrigin": 20100},
  "endsAt": {"onLinearElement": "ne4", "offsetFromOrigin": 12000},
  "hasSequence": ["ne3"]
} [Open]

```

SPMS-7468 - NetLinearReference

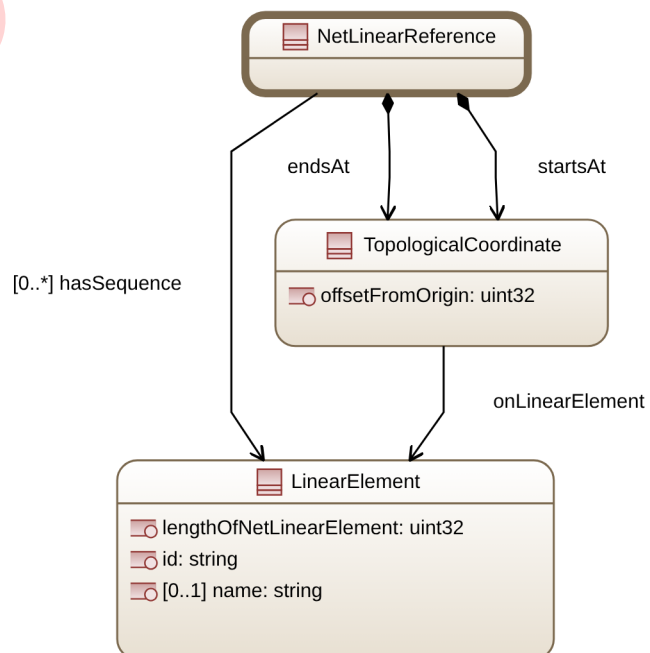

Defines a linked path on the topology [

Figure 10 Tree View of NetLinearReference

]

SPT2TS-125513 - NetLinearReference (LinkedPath)

```

{
  "structs": [
    {
      "name": "NetLinearReference",
      "info": "Defines a linked path on the topology",
      "attrs": [
        {
          "intId": 1, "name": "startsAt", "composition": "TopologicalCoordinate", "info": "Defines the starting coordinate of a linear reference",
        },
        {
          "intId": 2, "name": "endsAt", "composition": "TopologicalCoordinate", "info": "Defines the ending coordinate of a linear reference.",
        },
        {
          "intId": 3, "name": "hasSequence", "reference": "LinearElement", "multiplicity": "*", "ordered": "byIndex",
          "info": "Defines a sequence of linearElements from the start to the end excluding those defined in startAt- and endsAt-TopologicalCoordinates."
        }
      ]
    }
  ]
}

```

2.2.3.4 NetAreaReference (Track Area)

SPT2TS-127643 - A NetAreaReference groups an arbitrary number of NetLinearReferences. The sections don't have to be connected / adjacent to each other. The Track Area groups the sections to a logical entity, usually to illustrate a technical or functional context. The abstract concept can be used to define topological extent for the concepts like Area Of Control. E.g., an Area of Control can be of a type Track Area which is defined for a relevant use case.

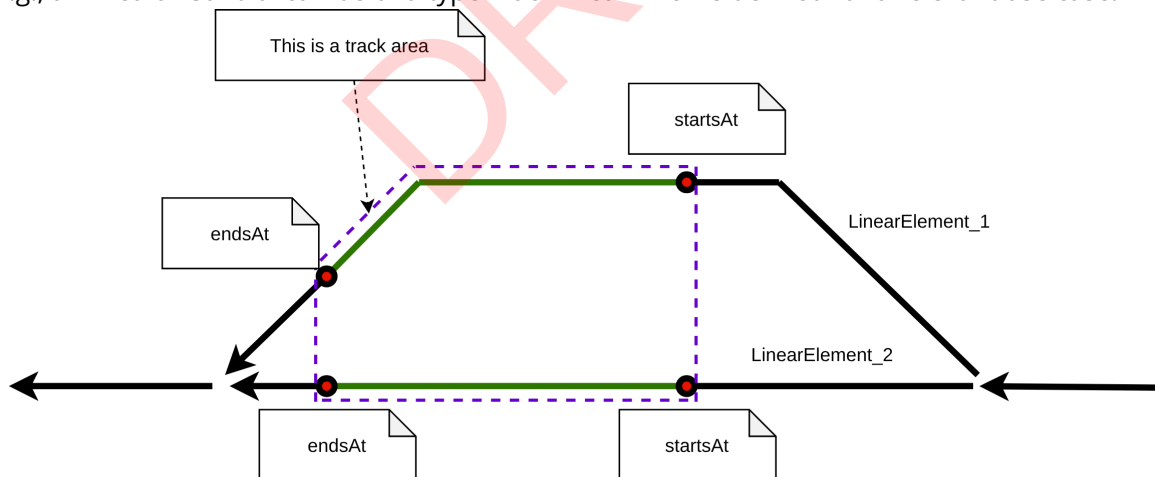


Figure 11 Illustration for Track Area

The following equivalent classes from other models can be referred to:

- Track Area in  SPT2TS-7 - RCA Digital Map – MAP Object Catalogue [RCA.Doc.69]

```

{
  "includes": [
    {
      "startsAt": {"onLinearElement": "LinearElement_1", "offsetFromOrigin": 200000},
      "endsAt": {"onLinearElement": "LinearElement_1", "offsetFromOrigin": 1200000},
    }
  ]
}

```


```

"hasSequence": []
},
{
"startsAt": {"onLinearElement": "LinearElement_2", "offsetFromOrigin": 200000},
"endsAt": {"onLinearElement": "LinearElement_2", "offsetFromOrigin": 1200000},
"hasSequence": []
}
]
}
[ 🚪 Open ]

```

SPMS-7469 - NetAreaReference

Represents an area reference in the network.

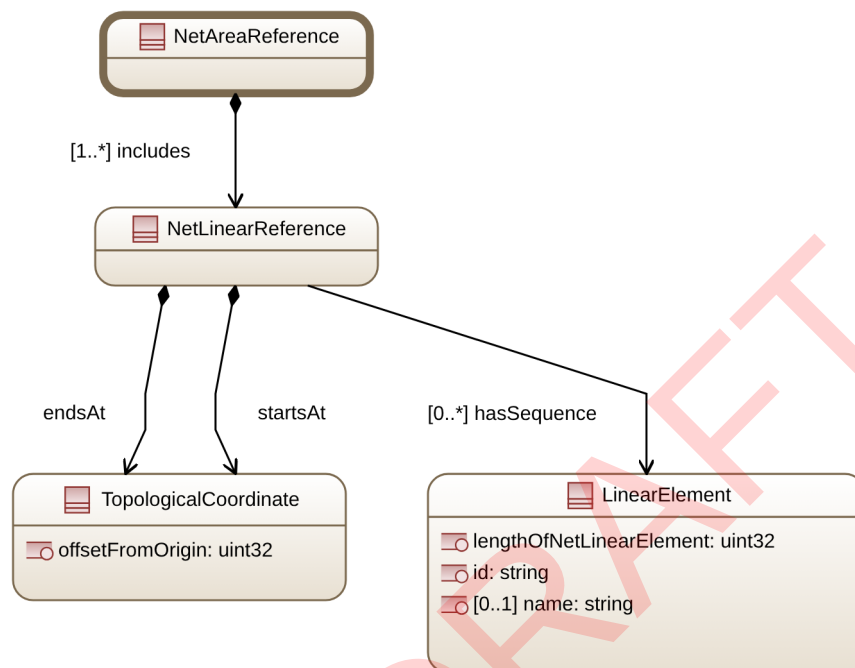

[
Figure 12 Tree View of NetAreaReference
]

SPT2TS-127642 - NetAreaReference

```

{
"structs": [
{
"name": "NetAreaReference",
"info": "Represents an area reference in the network.",
"attrs": [
{"intId": 1, "name": "includes", "composition": "NetLinearReference", "multiplicity": "1..*", "info": "List of linear references included in an network area reference."}
]
}
]
}
}

```

2.3 Track Geometry

SPT2TS-49004 - Track geometry, also known as alignment, defines where the track centre line runs on the surface of the earth. This is typically achieved by defining track centre axes as a sequence of

geometric parametric figures, straights, curves, clothoids, etc. It also includes cant definitions. Alternatively, track geometry is given as a suite of points in 3D space that samples the track centre line with an appropriate rate.

Coordinates fixate the track geometry on the surface of the earth and are defined in an appropriate coordinate reference system. [Content to be approved]

SPT2TS-49003 - The track geometry information is expected to be sufficiently consistent with the real track axis, so it fulfils all criteria of "reliable data".

Reliable Data refers to a typical characteristic of data which satisfies the qualities of being trustworthy/ lower probability of incorrect information/lower fault rate of the information, current (not obsolete), complete, and accurate.

Along the life cycle and depending on data availability, several types of geometry are applied:

- design geometry is the idealised geometry as designed in a CAD tool, sometimes called "to-build" or "as-planned".
- as-built geometry describes the geometry as established after track works or tamping.
- as-is geometry is the surveyed geometry, possibly post-processed by the surveyor.

There is maximum (today national specific) tolerances which define the maximum deviation between design geometry (to-build, as-planned) and the real track axes ("as-built"). In addition, this track centre line is restored after each maintenance/tamping procedure. So to achieve maximum robustness and avoid additional error margins (i.e. from dynamical acquisition/surveys) the originally designed track geometry data is assumed to be used.

If this information is not available in a reliable (updated, accurate) way, the track geometry based on surveys ("as-is") is assumed to be used for use cases like ETCS or ATO engineering. However, use cases like maintenance (tamping) will always rely on the desired design situation ("to build").

The track geometry model shall support different levels of details for track description to support the following use cases:

1. Detailed track geometry data for exact track construction, engineering, maintenance or other use cases requiring the actual segments (such as straights, curves, transitions) of track geometry.
2. Approximate track geometry data optimised for efficient transmission and usage in real-time, e.g. for train protection systems or train operation (e.g. ATO segment profile)

[Content to be approved]

2.3.1 Track Edge Geometry

2.3.1.1 Input models / references

SPT2TS-64091 - The track edge geometry definition follows the definitions from SPT2TS-10 - RSM - RailSystemModel and SPT2TS-7 - RCA Digital Map – MAP Object Catalogue [RCA.Doc.69]. [Content to be approved]

2.3.1.2 Design decisions

SPT2TS-49017 -

The track geometry definition shall ensure that the geometric primitive elements are specified for each track edge, because

- it ensures that no backwards search along the track edges is required to identify the specific values (such as gradient, radius, etc.).
- "Breaking up" segments that straddle a track edge is computationally hard and should not be the responsibility of the data consumer.
- Assigning segments to areas and subdividing areas is computationally easier

[Content to be approved]

SPT2TS-49016 - The track geometry definition shall ensure that the entire extent (0..length) of the track edge is populated with the required geometric primitive elements. [🔍 Content to be approved]

SPT2TS-64092 - The track edge geometry has a list of one or more contiguous, i.e. abutting segments. A track segment is a parametrised geometric figure, i.e. line, arc or transition. [🔍 Content to be approved]

SPT2TS-49014 - The list of segments is ordered from start to end of the track edge. [🔍 Content to be approved]

SPT2TS-49038 - A segment is assigned to exactly one track edge geometry; a segment never straddles two track edges. [🔍 Content to be approved]

SPT2TS-49036 - Redundant transmission of start- and end-values (e.g. position, azimuth, radius,..) is avoided, which reduces data volume and the need to check plausibility by the data receiver (the next segment starts where the previous one ended). Instead,

- Initial values of a segment (e.g. position, azimuth, radius, ..) are always informed.
- Final/end values (e.g. azimuth, radius) of a segment are defined by the initial values of the next segment
- to describe the complete edge, a final segment with length=0 is required to define the end azimuth of a transition curve, if the last track edge ends with a transition curve.

[🔍 Content to be approved]

SPT2TS-49034 - The position along the track p informs where the segment starts (offset). Position p is the distance a train will travel along the 2D projection of the track on a horizontal mapping plane. The 3D projection of the track can be derived depending on the data consumer needs using 2D values and with required corrections. 2D was chosen as compromise to minimise the efforts spent for 3D data provisioning/engineering. [🔍 Content to be approved]

SPT2TS-123551 - The length of a segment is defined by the position of the next segment minus the position of the current segment ($p_{n+1} - p_n$). [🔍 Content to be approved]

SPT2TS-49031 - Azimuth is the clockwise bearing with respect to the geographic north. [🔍 Content to be approved]

SPT2TS-49028 - Cant is commonly expressed as superelevation, i.e. the height difference between the inner and outer rail along the curve because it's a convenient way of acquiring the measure in the field. Defining which is the inner and outer rail can be ambivalent but the left and right rail is well defined when given with respect to the orientation of the track edge. The cant here represents applied cant. [🔍 Content to be approved]

SPT2TS-49025 - The position on a map (coordinates) isn't given (moved to another part of the model) [🔍 Content to be approved]

SPT2TS-49045 -

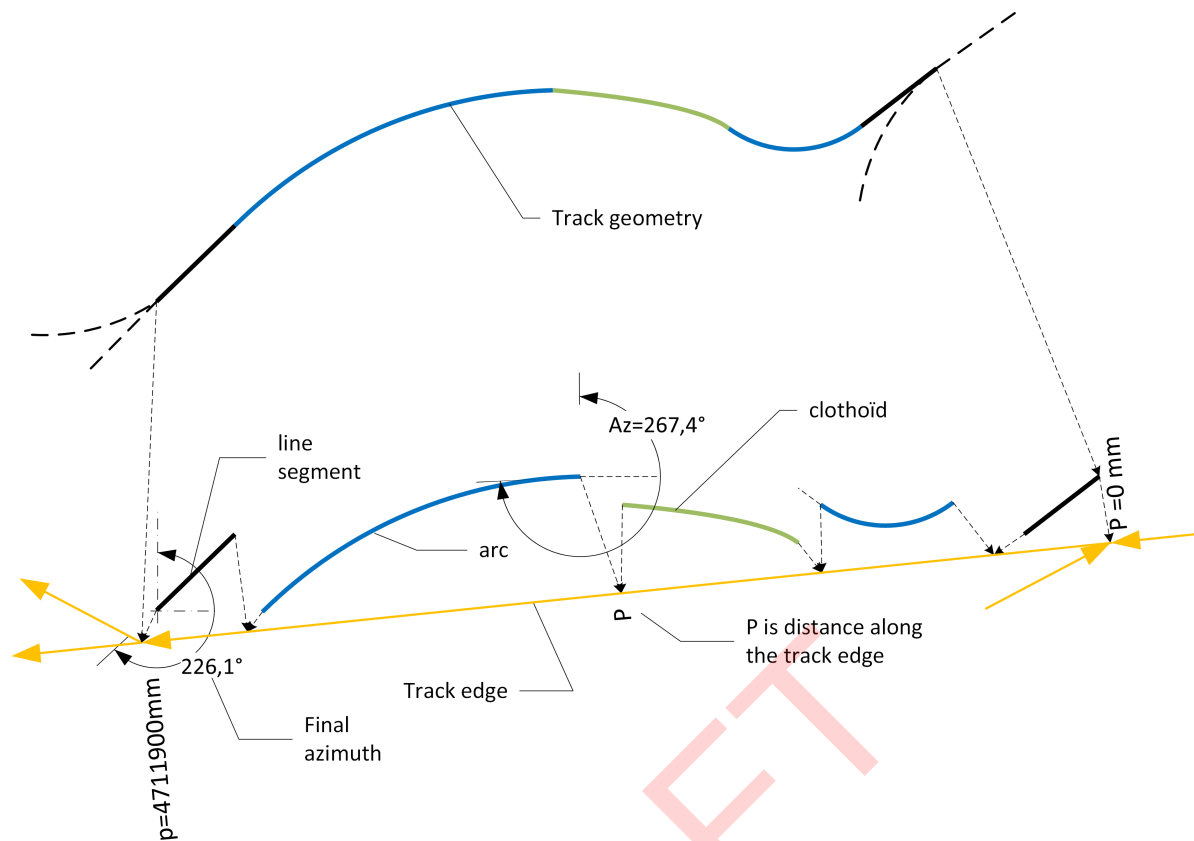






Figure 13 Top view of exact track geometry model. The exact geometry of a track edge is a list of track segments, ordered in the direction of the track edge (right to left in this figure). The position and azimuth of each segment are given.


The following equivalent classes from other models can be referred to:

- Horizontal alignment, Vertical alignment, and Lateral inclinations in  SPT2TS-10 - RSM - RailSystemModel
- Curve, Gradient, and Cant in  SPT2TS-7 - RCA Digital Map – MAP Object Catalogue [RCA.Doc.69]
- Horizontal alignment, Vertical alignment, and Lateral inclinations in  SPT2TS-8 - EULYNX Data Model (dataprep.eulynx.eu)
-  SPT2TS-9 - LinX4Rail CDM ->PSM (Platform Specific Data Model)

[🔍🕒 Content to be approved]

SPMS-7470 - GeometryArea

Defines the container geometry area within INFRA Domain

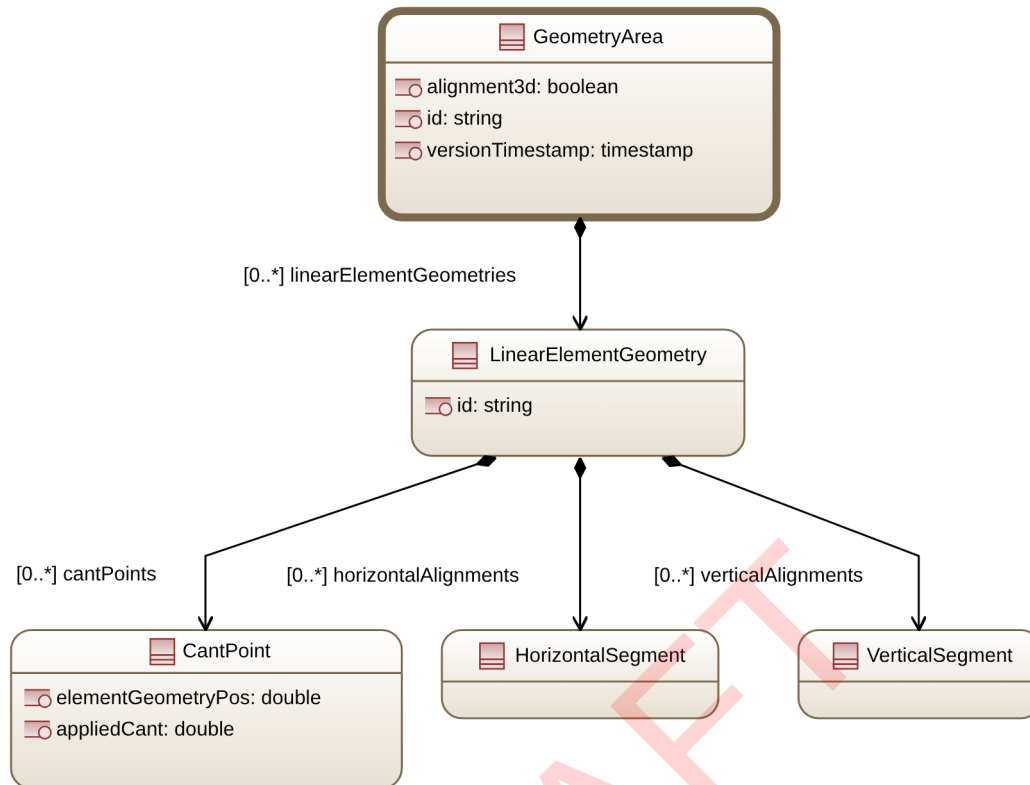

[
Figure 14 Tree View of GeometryArea

]

SPT2TS-49044 - GeometryArea

```

{
  "structs": [
    {
      "name": "GeometryArea",
      "info": "Defines the container geometry area within INFRA Domain",
      "attrs": [
        {"intId": 1, "name": "id", "dataType": "string", "key": "global", "sameKeyAs": "TopoArea", "info": "Identity of the object; used for referencing"},
        {"intId": 2, "name": "versionTimestamp", "dataType": "timestamp", "info": "version information which is valid since timestamp"},
        {"intId": 3, "name": "alignment3d", "dataType": "boolean", "info": "Defines the 3d alignment information for the geometry area. if true, all positions and length calculated on 3d line. if false - on 2d projection"},
        {"intId": 4, "name": "linearElementGeometries", "composition": "LinearElementGeometry", "multiplicity": "0..*", "ordered": "byKey", "info": "composes of linear element geometries"}
      ]
    }
  ]
}

```

SPT2TS-125443 - LinearElementGeometry

```
{
  "structs": [
    {
      "name": "LinearElementGeometry",
      "info": "Defines the geometry of the linear element centre line as a list of parametrised curves. The geometry is smooth; no discontinuities in azimuth or inclination.",
      "belongsToSubPackage": "geometry",
      "attrs": [
        {"intId": 1, "name": "id", "dataType": "string", "key": "global", "sameKeyAs": "LinearElement", "info": "Identity of the object; used for referencing"},
        {"intId": 2, "name": "horizontalAlignments", "composition": "HorizontalSegment", "multiplicity": "1..*", "info": "Defines a sequence of geometric primitives, i.e. arc, line or clothoid, that compose this track geometry", "ordered": "byIndex"},
        {"intId": 3, "name": "verticalAlignments", "composition": "VerticalSegment", "multiplicity": "1..*", "info": "Defines a sequence of geometric primitives, i.e. arc, line or clothoid, that compose this track geometry", "ordered": "byIndex"},
        {"intId": 4, "name": "cantPoints", "composition": "CantPoint", "multiplicity": "0..*", "info": "Defines the cant points along the linear element. The linear element must be completely defined, at least at beginning and end. Empty means undefined", "ordered": "byIndex"}
      ]
    }
  ]
}
```

SPT2TS-125444 - HorizontalSegment

```
{
  "structs": [
    {
      "name": "HorizontalSegment",
      "info": "Defines a curvi-linear geometric primitive, mathematically represents a horizontal segment of the centre line of a railway track",
      "belongsToSubPackage": "geometry",
      "union": true,
      "attrs": [
        {"intId": 1, "name": "horizontalSegmentLine", "composition": "HorizontalLine", "info": "composes of lines"},
        {"intId": 2, "name": "horizontalSegmentArc", "composition": "HorizontalArc", "info": "composes of arcs"},
        {"intId": 3, "name": "horizontalSegmentTransition", "composition": "HorizontalTransition", "info": "composes of transition curves"}
      ]
    }
  ]
}
```

SPT2TS-125445 - HorizontalLine

```
{
  "structs": [
```



```
{
  "name": "HorizontalLine",
  "info": "Defines the geometric primitive for a horizontal linear segment",
  "belongsToSubPackage": "geometry",
  "attrs": [
    {"intId": 1, "name": "elementGeometryPos", "dataType": "double", "unit": "m", "info": "Defines the position on the associated Linear Element"},
    {"intId": 2, "name": "azimuth", "dataType": "double", "unit": "degree", "range": "0..360", "info": "Defines the azimuth at pos, i.e. bearing measured clockwise with respect to geographic north"}
  ]
}
```

SPT2TS-125437 - HorizontalArc

```
{
  "structs": [
    {
      "name": "HorizontalArc",
      "info": "Defines the geometric primitive for a horizontal arc of circle",
      "belongsToSubPackage": "geometry",
      "attrs": [
        {"intId": 1, "name": "elementGeometryPos", "dataType": "double", "unit": "m", "info": "position on the associated LinearElement"},
        {"intId": 2, "name": "azimuth", "dataType": "double", "unit": "degree", "range": "0..360", "info": "Defines the azimuth at pos, i.e. bearing measured clockwise with respect to geographic north"},
        {"intId": 3, "name": "radius", "dataType": "double", "unit": "m", "info": "Defines the radius at pos, negative-counter-clockwise/left-curve, positive-clockwise/right-curve"}
      ]
    }
  ]
}
```

SPT2TS-125438 - HorizontalTransition

```
{
  "structs": [
    {
      "name": "HorizontalTransition",
      "info": "Defines a geometric primitive for a horizontal transition curve, a clothoid.",
      "belongsToSubPackage": "geometry",
      "attrs": [
        {"intId": 1, "name": "elementGeometryPos", "dataType": "double", "unit": "m", "info": "position on the associated Linear Element"},
        {"intId": 2, "name": "azimuth", "dataType": "double", "unit": "degree", "range": "0..360", "info": "Defines the azimuth at pos, i.e. bearing measured clockwise with respect to geographic north"},
        {"intId": 3, "name": "radius", "dataType": "double", "unit": "m", "info": "Defines the radius at pos, negative-counter-clockwise/left-curve, positive-clockwise/right-curve"}
      ]
    }
  ]
}
```

```

    curve"},
    {"intId": 4, "name": "transitionType", "enumType": "TransitionType", "info": "defines different transition
types"}
  ]
},
"enums": [
{
  "name": "TransitionType",
  "enumLiterals": [
    {"intId": 0, "name": "clothoidCurve"},
    {"intId": 1, "name": "biquadraticParabola"},
    {"intId": 2, "name": "blossCurve"},
    {"intId": 3, "name": "cosineCurve"},
    {"intId": 4, "name": "cubicParabola"},
    {"intId": 5, "name": "sineCurve"},
    {"intId": 6, "name": "wienerBogen"}
  ]
}
]
} []

```

SPT2TS-125439 - VerticalSegment

```

{
  "structs": [
    {
      "name": "VerticalSegment",
      "info": "Defines a curvi-linear geometric primitive, mathematically represents a vertical segment of
the centre line of a railway track",
      "belongsToSubPackage": "geometry",
      "union": true,
      "attrs": [
        {"intId": 1, "name": "verticalSegmentLine", "composition": "VerticalLine", "info": "composes of lines"},
        {"intId": 2, "name": "verticalSegmentArc", "composition": "VerticalArc", "info": "composes of arcs"}
      ]
    }
  ]
} []

```

SPT2TS-125440 - VerticalLine

```

{
  "structs": [
    {
      "name": "VerticalLine",
      "info": "Defines the geometric primitive for vertical linear segment",
      "belongsToSubPackage": "geometry",
      "attrs": [
        {"intId": 1, "name": "elementGeometryPos", "dataType": "double", "unit": "m", "info": "position on the
associated LinearElement"},

```

```
{
  "intId": 2, "name": "slope", "dataType": "double", "unit": "permill",
  "info": "Defines the vertical slope at pos, between the horizon and the track centre line. Viewed in the direction of the track edge. Positive for rising slope and negative for falling slope."
}
]
```

SPT2TS-125441 - VerticalArc

```
{
  "structs": [
    {
      "name": "VerticalArc",
      "info": "Defines the geometric primitive for a vertical arc.",
      "belongsToSubPackage": "geometry",
      "attrs": [
        {
          "intId": 1, "name": "elementGeometryPos", "dataType": "double", "unit": "m", "info": "position on the associated LinearElement"},
        {
          "intId": 2, "name": "slope", "dataType": "double", "unit": "permill",
          "info": "Defines the vertical slope at pos, between the horizon and the track centre line. Viewed in the direction of the track edge. Positive for rising slope and negative for falling slope."},
        {
          "intId": 3, "name": "radius", "dataType": "double", "unit": "m",
          "info": "Defines the radius at pos, negative-counter-clockwise/left-curve, positive-clockwise/right-curve"},
        {
          "intId": 4, "name": "arcType", "enumType": "ArcType", "info": "Defines the type of Arc. For more details see https://ifc43-docs.standards.buildingsmart.org/IFC/RELEASE/IFC4x3/HTML/lexical/IfcAlignmentVerticalSegmentTypeEnum.htm"
        }
      ]
    },
    {
      "enums": [
        {
          "name": "ArcType",
          "enumLiterals": [
            {
              "intId": 0, "name": "circularArc"},
            {
              "intId": 1, "name": "parabola"
            }
          ]
        }
      ]
    }
  ]
}
```

SPT2TS-125442 - CantPoint

```
{
  "structs": [
    {
      "name": "CantPoint",
      "info": "Defines Cant (Superelevation) at the locations of start and end Cant Ramps on the track.",
      "attrs": [
        {
          "intId": 1, "name": "elementGeometryPos", "dataType": "double", "unit": "m",
```

```

"info": "position on the associated track edge"},
{"intId": 2, "name": "appliedCant", "dataType": "double", "unit": "m",
"info": "Height of the outer rail minus the inner rail. Outer rail and inner rail are defined according to
the direction of curve. Rollangle=(arcsin(cant/gauge)), gauge is distance between middle of the
railheads, e.g. 1500mm for EU-standard gauge '1435mm' ; The applied cant is defined for the start"}
]
}
]
}[]

```

SPT2TS-49042 - Example "Linear Element Geometry":

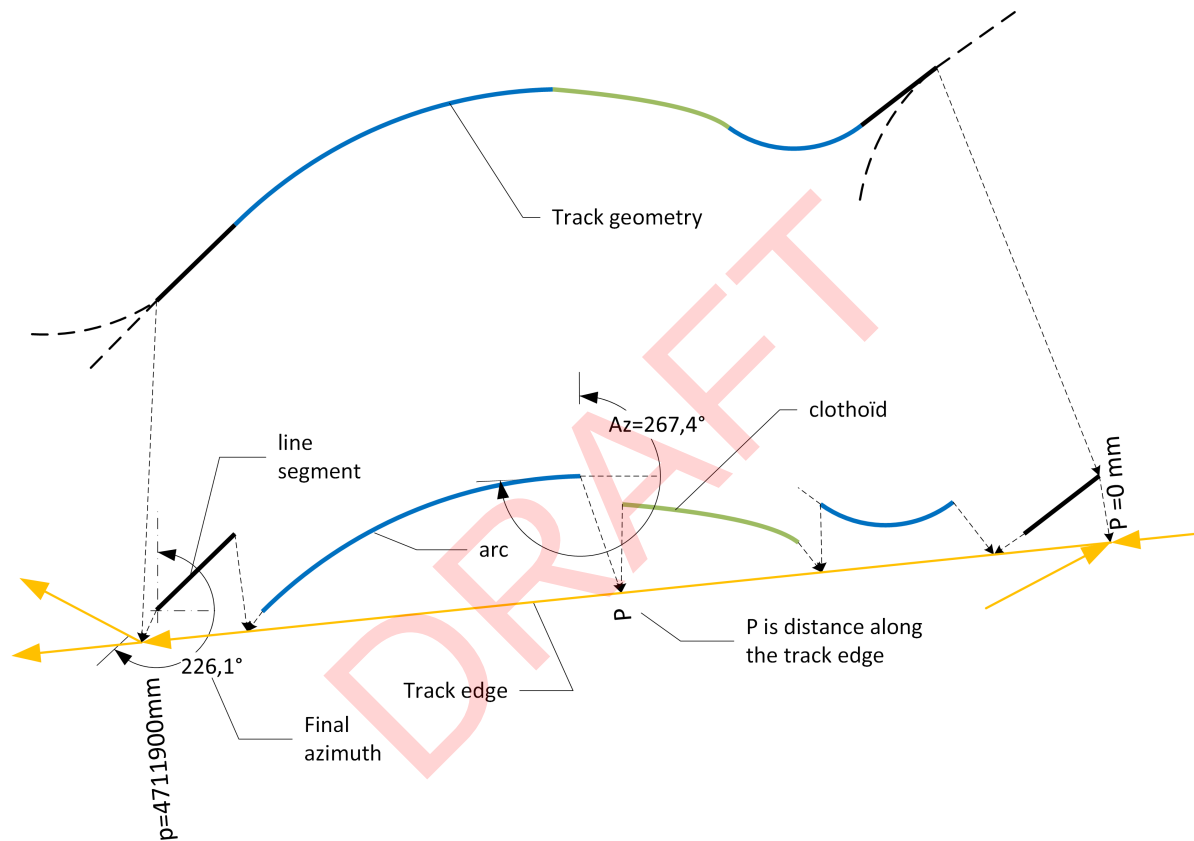


Figure 15 Illustration of Track Edge Geometry

```

{
  "id": "Area51",
  "linearElementGeometries": [
    {
      "id": "track1",
      "horizontalSegments": [
        {"horizontalSegmentLine": {"elementGeometryPos": 0, "radius": 0, "azimuth": 270000}},
        {"horizontalSegmentArc": {"elementGeometryPos": 51000, "radius": 480000, "azimuth": 270000}},
        {"horizontalSegmentTransition": {"elementGeometryPos": 151000, "radius": -480000, "azimuth":
          170000, "type": "clothoid"}},


```


```
{
  "horizontalSegmentArc": {
    "elementGeometryPos": 251000,
    "radius": -1480000,
    "azimuth": 267400
  },
  "horizontalSegmentLine": {
    "elementGeometryPos": 651000,
    "radius": 0,
    "azimuth": 216400
  }
}
]
}
]
}
```

[🔗 Open]

2.3.2 Linear Element Sampled Geometry

2.3.2.1 Input models / References

SPT2TS-64093 - The linear element geometry definition follows the definitions  SPT2TS-9 - LinX4Rail CDM ->PSM (Platform Specific Data Model)
The following equivalent classes from other models can be referred to:

-  SPT2TS-9 - LinX4Rail CDM ->PSM (Platform Specific Data Model)

[🔗 Open]

2.3.2.2 Design Decisions

SPT2TS-49013 - Sampled linear element geometry represents the linear element geometry as a list of sampled discrete points. This is typically used when the exact geometry isn't available or not required for the specific use case (e.g ATO Segment Profile). The sampling rate can't be prescribed but be such as to satisfy current use cases. By increasing the sampling rate (e.g. 10cm sample point distance), a very exact representation is possible as well if needed.

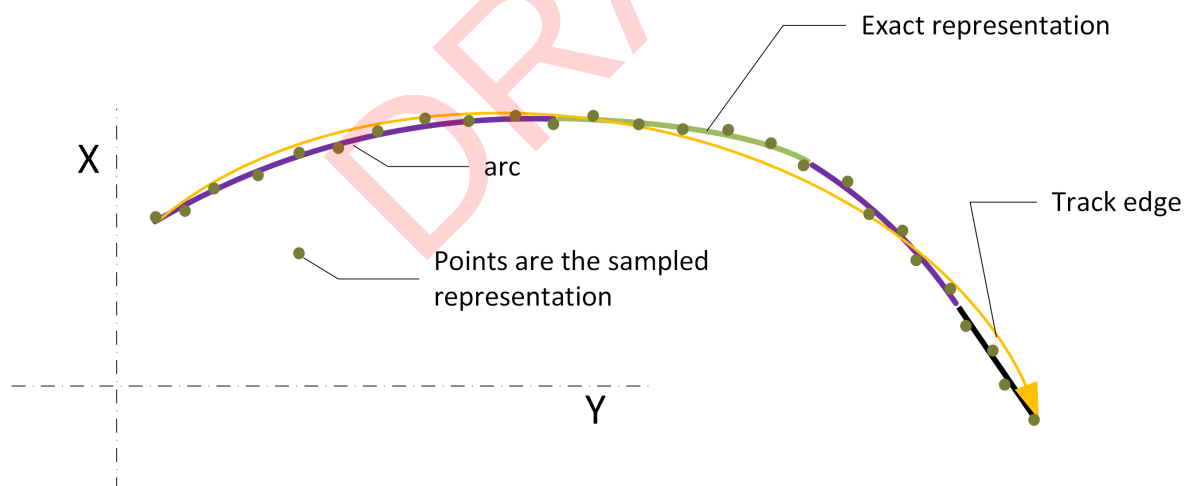



Figure 16: Top view of a sampled track geometry. A track edge is associated with a list of points, each of which is a sample of the track centre line.

[🔗 Open]

SPT2TS-49012 - The decision of Linear Element Geometry (see  SPT2TS-49033 - Design decisions) are also valid for the sampled track geometry, though the amount of information is reduced (e.g. azimuth, slope not required for simple model and not added). [🔗 Open]

SPMS-7480 - SampledGeometryArea

Defines the container sampled geometry area within INFRA Domain

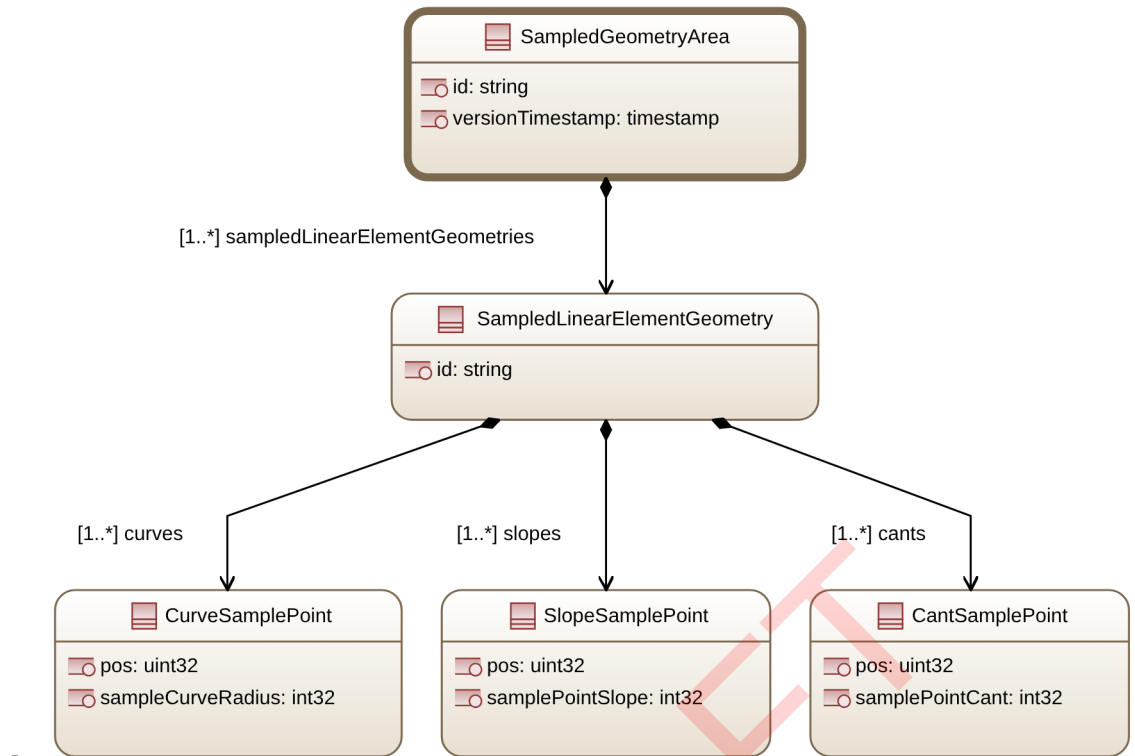


Figure 17 Tree View of SampledGeometryArea

SPT2TS-49009 - SampledGeometryArea

```

{
  "structs": [
    {
      "name": "SampledGeometryArea",
      "info": "Defines the container sampled geometry area within INFRA Domain",
      "attrs": [
        {"intId": 1, "name": "id", "dataType": "string", "key": "global", "sameKeyAs": "TopoArea", "info": "Identity of the object; used for referencing"},
        {"intId": 2, "name": "versionTimestamp", "dataType": "timestamp", "info": "version information which is valid since timestamp"},
        {"intId": 3, "name": "sampledLinearElementGeometries", "composition": "SampledLinearElementGeometry", "multiplicity": "1..*", "ordered": "byKey", "info": "composes of sampled linear element geometries"}
      ]
    }
  ]
}

```

SPT2TS-125447 - SampledLinearElementGeometry

```

{
  "structs": [

```

```
{
  "name": "SampledLinearElementGeometry",
  "info": "Defines the container sampled linear element geometry within INFRA Domain",
  "attrs": [
    {"intId": 1, "name": "id", "dataType": "string", "key": "global", "sameKeyAs": "LinearElement",
      "info": "Identity of the object; used for referencing"},
    {"intId": 2, "name": "slopes", "composition": "SlopeSamplePoint", "multiplicity": "1..*", "ordered":
      "byIndex", "info": "composes of slope sample points"},
    {"intId": 3, "name": "curves", "composition": "CurveSamplePoint", "multiplicity": "1..*", "ordered":
      "byIndex", "info": "composes of curve sample points"},
    {"intId": 4, "name": "cants", "composition": "CantSamplePoint", "multiplicity": "1..*", "ordered":
      "byIndex", "info": "composes of cant sample points"}
  ]
}
```

SPT2TS-125448 - SlopeSamplePoint

```
{
  "structs": [
    {
      "name": "SlopeSamplePoint",
      "info": "Defines the Slope (gradient) of the track at a given location on the track.",
      "attrs": [
        {"intId": 1, "name": "pos", "dataType": "uint32", "unit": "m", "exp": -3,
          "info": "position on the associated LinearElement"},
        {"intId": 2, "name": "samplePointSlope", "dataType": "int32", "unit": "permill", "exp": -1,
          "info": "Defines the vertical slope at pos, between the horizon and the track centre line. Viewed in the
            direction of the LinearElement. Positive for rising slope and negative for falling slope."}
      ]
    }
  ]
}
```

SPT2TS-125449 - CantSamplePoint

```
{
  "structs": [
    {
      "name": "CantSamplePoint",
      "info": "Defines the cant(superelevation) of the track at a given location on the track.",
      "attrs": [
        {"intId": 1, "name": "pos", "dataType": "uint32", "unit": "m", "exp": -3,
          "info": "position on the associated LinearElement"},
        {"intId": 2, "name": "samplePointCant", "dataType": "int32", "unit": "m", "exp": -3,
          "info": "Defines the height of the outer rail minus the inner rail. Outer rail and inner rail are defined
            according to the direction of curve. Rollangle=(arcsin(cant/gauge), gauge is distance between centers
            of rail-heads, e.g. 1500mm for EU-standard gauge."}
      ]
    }
  ]
}
```

```
}]  
}[ ]
```

SPT2TS-125446 - CurveSamplePoint

```
{  
  "structs": [  
    {  
      "name": "CurveSamplePoint",  
      "info": "Defines curve (radius) of the track at a given location on the track.",  
      "attrs": [  
        {"intId": 1, "name": "pos", "dataType": "uint32", "unit": "m", "exp": -3,  
         "info": "position on the associated LinearElement"},  
        {"intId": 2, "name": "sampleCurveRadius", "dataType": "int32", "unit": "m", "exp": -3,  
         "info": "Defines the radius at pos, negative-counter-clockwise/left-curve, positive-clockwise/right-curve"}  
      ]  
    }  
  ]  
}[ ]
```

SPT2TS-49007 - Example "Linear Element Sampled Geometry":

DRAFT

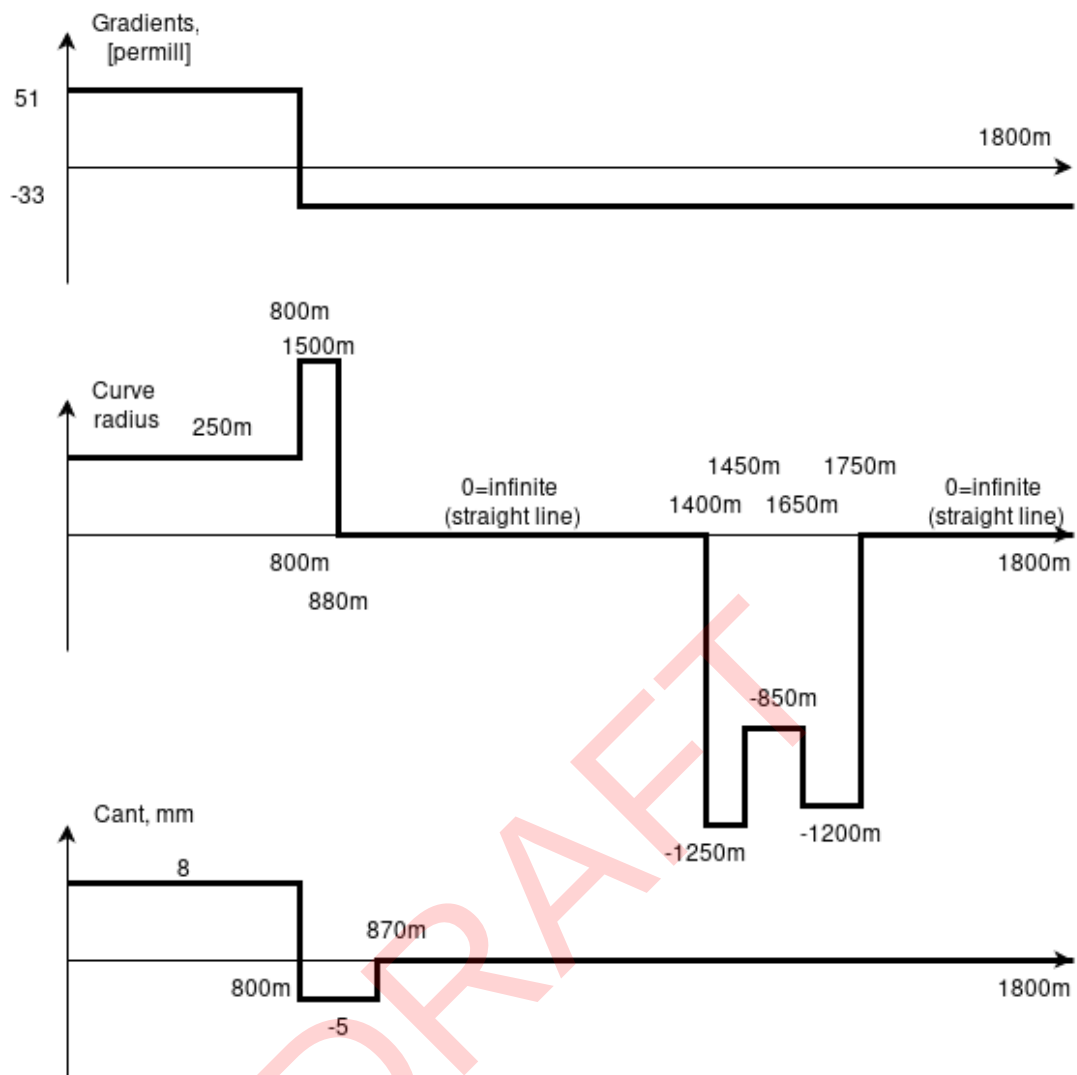


Figure 18 Example for a track edge geometry.

```
{
  "id": "Area51",
  "linearElementGeometries": [
    {
      "id": "linearElement_1",
      "slopes": [
        {"pos": 0, "samplePointSlope": 51000},
        {"pos": 800000, "samplePointSlope": -33000}
      ],
      "curves": [
        {"pos": 0, "sampleCurveRadius": 250000},
        {"pos": 800000, "sampleCurveRadius": 1500000},
        {"pos": 880000, "sampleCurveRadius": 0},
        {"pos": 1400000, "sampleCurveRadius": -1250000},
        {"pos": 1450000, "sampleCurveRadius": -850000},

```

```
{
  "pos": 1650000, "sampleCurveRadius": -1200000},
  {"pos": 1750000, "sampleCurveRadius": 0}
],
"cants": [
  {"pos": 0, "samplePointCant": 8},
  {"pos": 800000, "samplePointCant": -5},
  {"pos": 870000, "samplePointCant": 0}
]
},
... other trackEdgeGeometries
]
} [ ➡ Open ]
```

2.4 Switch, Crossing, Derailer

SPT2TS-63857 - Switch, crossing and derailer are track assets / field elements. They contain movable components which are equipped with actuators in order to set / change the positions of the field element.

Switches are controlled field elements which represent a branching point in the track network wherein exists a possibility to continue either on the right or on the left branch:

- Switch (with and without movable frogs)
- Single- and double-slip crossings

In a switch, a branch track branches off from a main track. A switch offers two driving possibilities i.e. one along main track and one along the branch track. The required direction of travel can be set using the point machines.

A single or double slip crossing are between two tracks without grade of separation and with possibility to switch between straight passing track and turning track.

Derailer is a safety device attached to a rail, which when operated can cause a derailment of a train that is making an unauthorised movement. A derailer prevents rail vehicles from driving on the track beyond the point secured by the derailer.

Derailers are intended to prevent accidents caused by cold movements, for example rolling of parked rail vehicles which were not secured against unintentional movements.

A track crossing between two tracks without grade of separation and without possibility to switch between straight passing track and turning track. In other words, diamond crossing is the overlapping/intersection of two tracks at the same level without the possibility of changing tracks. There are two possible types of a diamond crossing, one with movable tongues (switched diamond crossing) and one without movable parts (non-switched diamond crossing)

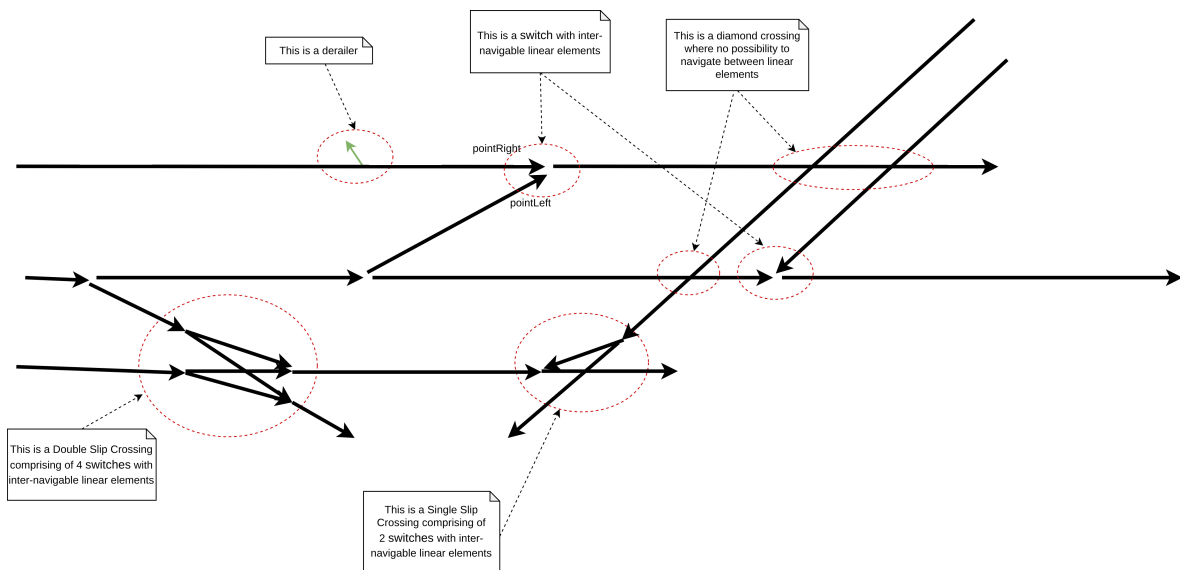


Figure 19 Meaning of attributes in classes

The following equivalent classes from other models can be referred to:


- Point, Crossing, and Derailer in  SPT2TS-7 - RCA Digital Map – MAP Object Catalogue [RCA.Doc.69]
- Crossing, Derailer, Buffer Stop, Rail Switch in  SPT2TS-9 - LinX4Rail CDM ->PSM (Platform Specific Data Model)
- Crossing and Turnout in  SPT2TS-10 - RSM - RailSystemModel

[ Open]

2.4.1 Design Decisions

SPT2TS-123574 - In case of crossing remains the question, how this functional element is represented in the topology Map:

1. without splitting the linear elements (the Crossing-object defines location of the crossing on the linear element)
2. by splitting LinearElement at the crossing and introducing NetRelations with applicableDirection == None.

The first option was selected as much more compact, without loss of information. The crossing in this case contains two TopologicalCoordinates marking the crossing locations on LinearElements, rather than defining a list of NetRelations, which would be the case for second option. [ Open]

SPMS-7526 - Switch

Defines the physical track asset Switch (Simple Point)

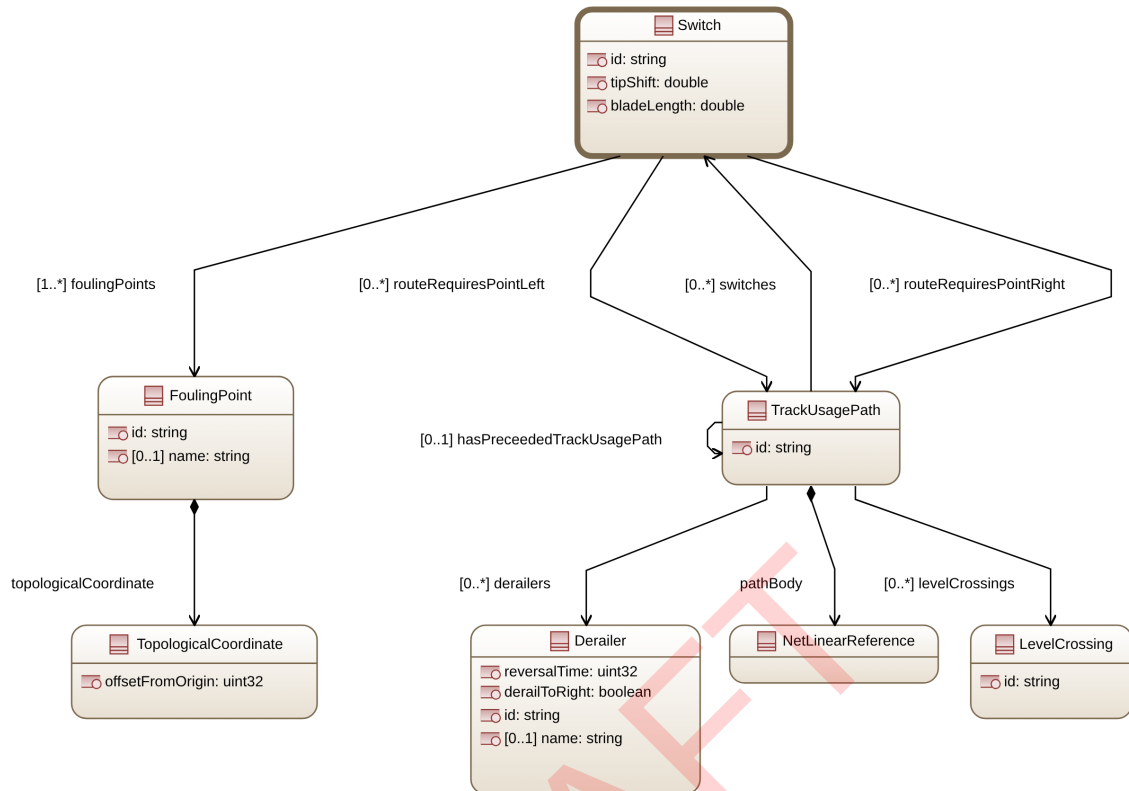


Figure 20 Tree View of Switch

SPT2TS-49048 - Switch (SimplePoint)

```

{
  "structs": [
    {
      "name": "Switch",
      "info": "A unit of track comprising two fixed rails (stock rails) and two movable rails (switch rails) used to direct vehicles from one track to another track.",
      "belongsToSubPackage": "FunctionalArea",
      "attrs": [
        {"intId": 1, "name": "id", "dataType": "string", "key": "global", "info": "Identity of the object; used for referencing ; structure refers to EULYNX EU.SAS.77"},
        {"intId": 2, "name": "reversalTime", "dataType": "uint32", "unit": "s", "exp": -1, "multiplicity": "0..1", "info": "Defines the time in seconds to switch from one position to the other ; 0 means unknown"},
        {"intId": 3, "name": "leftBranch", "reference": "NetRelation", "info": "NetRelation referencing the left side of the switch in the facing direction of the switch"},
        {"intId": 4, "name": "rightBranch", "reference": "NetRelation", "info": "NetRelation referencing the right side of the switch in the facing direction of the switch"},
        {"intId": 5, "name": "name", "dataType": "string", "info": "User-friendly name, only if different from id", "multiplicity": "0..1"}
      ]
    }
  ]
}

```


```

}
}[]

```

SPMS-7486 - SlipCrossing

Defines the physical track asset Slip Crossing ; 2 instances simple point define a single slip crossing and 4 instances of simple point defined a double slip crossing ; Reversal time is the maximum of known reversal times of simple points. If the reversal time of at least one simple point in the slip point is unknown, the reversal time of the slip point is unknown as well.

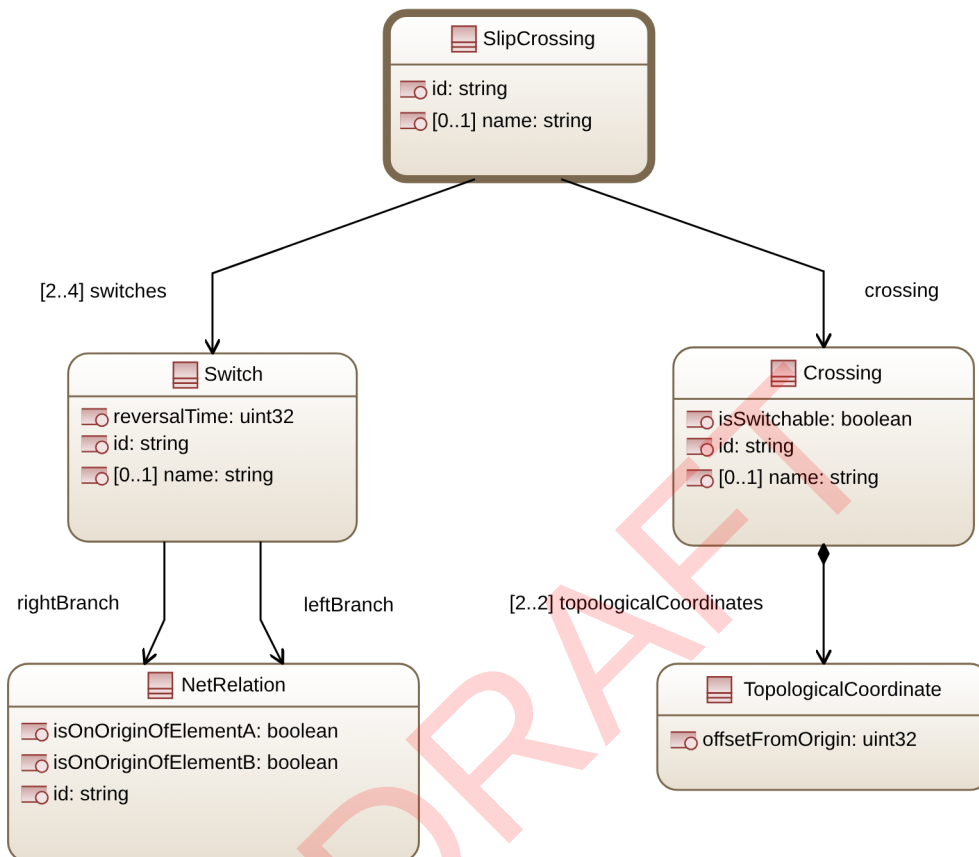

[
Figure 21 Tree View of SlipCrossing

]

SPT2TS-125450 - SlipCrossing

```


{
  "structs": [
    {
      "name": "SlipCrossing",
      "info": "Defines the physical track asset Slip Crossing ; 2 instances simple point define a single slip crossing and 4 instances of simple point defined a double slip crossing ; Reversal time is the maximum of known reversal times of simple points. If the reversal time of at least one simple point in the slip point is unknown, the reversal time of the slip point is unknown as well.",
      "belongsToSubPackage": "FunctionalArea",
      "attrs": [
        { "intId": 1, "name": "id", "dataType": "string", "key": "global", "info": "Identity of the object; used for referencing" },

```

```
{
  "intId": 2, "name": "switches", "reference": "Switch", "multiplicity": "2..4", "info": "Consists of simple points"},
  {"intId": 3, "name": "crossing", "reference": "Crossing", "info": "Consists of crossing"},
  {"intId": 4, "name": "name", "dataType": "string", "info": "User-friendly name, only if different from id",
    "multiplicity": "0..1"}
}
}
} []
```

SPMS-7487 - Derailer

Defines the physical track asset Derailer

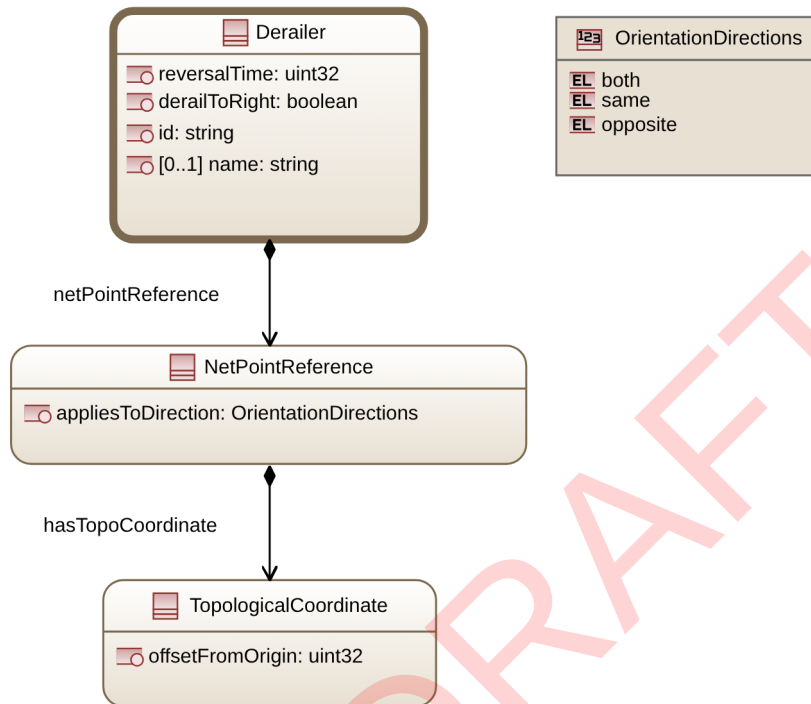

[
Figure 22 Tree View of Derailer
]


SPT2TS-125451 - Derailer

```
{
  "structs": [
    {
      "name": "Derailer",
      "info": "Defines the physical track asset Derailer",
      "belongsToSubPackage": "FunctionalArea",
      "attrs": [
        {"intId": 1, "name": "id", "dataType": "string", "key": "global", "info": "Identity of the object; used for referencing"},
        {"intId": 2, "name": "netPointReference", "composition": "NetPointReference", "info": "Defines position on LinearElement"},
        {"intId": 3, "name": "reversalTime", "dataType": "uint32", "unit": "s", "exp": -1, "multiplicity": "0..1", "info": "Defines the time in seconds to switch from one position to the other ; 0 means unknown"}
      ]
    }
  ]
}
```

```
{ "intId": 4, "name": "derailToRight", "dataType": "boolean", "info": "Defines the side on which the derailer
derails. If false = derailToLeft"},
{ "intId": 5, "name": "name", "dataType": "string", "info": "User-friendly name, only if different from id",
"multiplicity": "0..1"}
]
}}
}[]
```

SPMS-7488 - Crossing

Defines the physical track asset Crossing without possibility to switch between two track edges

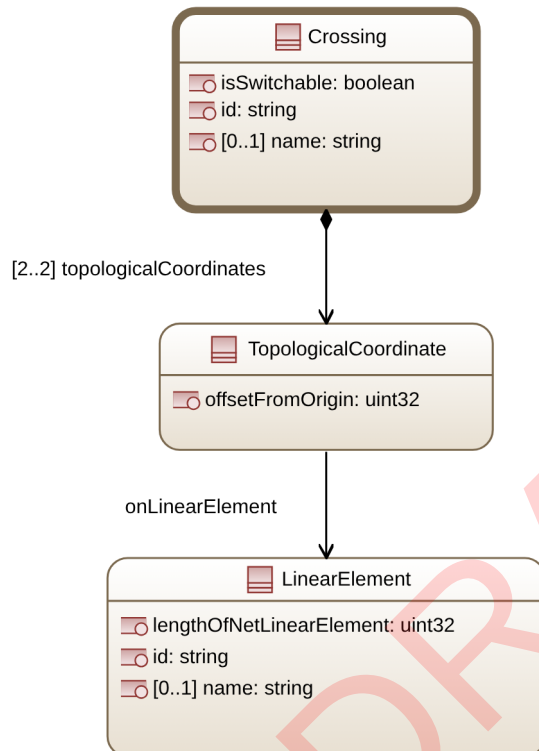

[
Figure 23 Tree View of Crossing

]

SPT2TS-125452 - Crossing

```
{
"structs": [
{
"name": "Crossing",
"info": "Defines the physical track asset Crossing without possibility to switch between two track edges",
"belongsToSubPackage": "FunctionalArea",
"attrs": [
{ "intId": 1, "name": "id", "dataType": "string", "key": "global", "info": "Identity of the object; used for
referencing"},
{ "intId": 2, "name": "topologicalCoordinates", "composition": "TopologicalCoordinate", "multiplicity": "2..2",
"info": "composes of topological coordinates"},
```

```
{ "intId": 3, "name": "isSwitchable", "dataType": "boolean", "info": "True: If the crossing is switchable ;
False: If the crossing is not switchable ; https://commons.wikimedia.org/wiki/
Category:Switched\_diamond\_crossings ",
{ "intId": 4, "name": "name", "dataType": "string", "info": "User-friendly name, only if different from id",
"multiplicity": "0..1"
}
}
}
}
```

2.5 Balise (Group)

SPT2TS-63858 - Balises (or Eurobalises in the context of ETCS) are technical devices on the railway track bed that store information (telegram) and transmit it to rail vehicles passing the location of the Balise. The balises shall be represented using a Track Edge Point on the topology and are not associated with a direction.

Balises are clustered in groups and each balise group can consist a maximum of 8 Balises. Orientation direction of the balises are explicitly provided.

The following equivalent classes from other models can be referred to:

- Balise and Balise Group in  SPT2TS-7 - RCA Digital Map – MAP Object Catalogue [RCA.Doc.69]
- Balise and Balise Group in  SPT2TS-9 - LinX4Rail CDM ->PSM (Platform Specific Data Model)
- Balise and Balise Group in <https://eulynx.eu/index.php/dataprep>

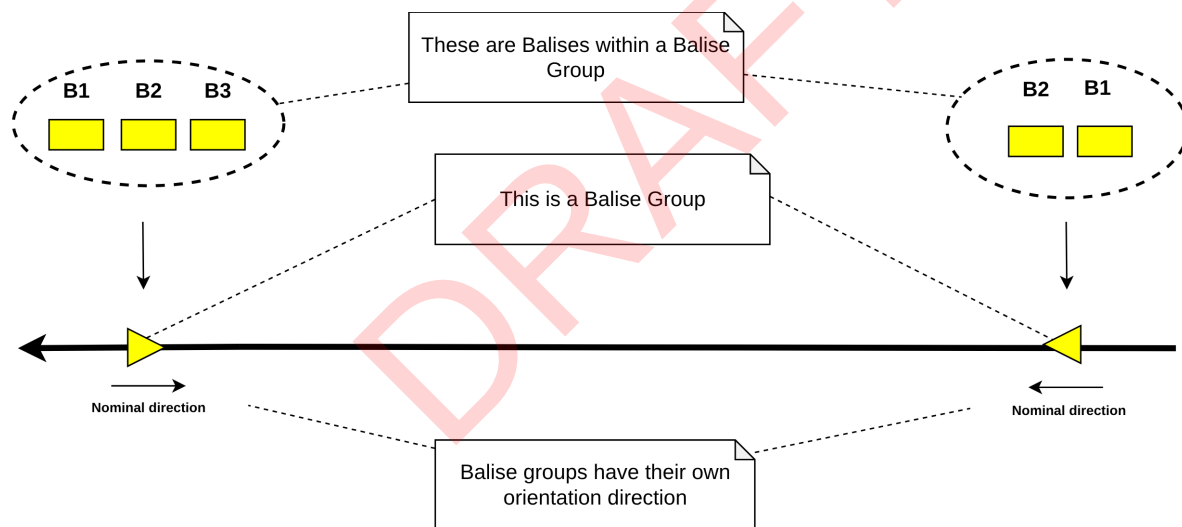



Figure 24 Balises and Balise Groups

[ Open]

SPMS-7489 - BaliseGroup

Defines a group of balises.

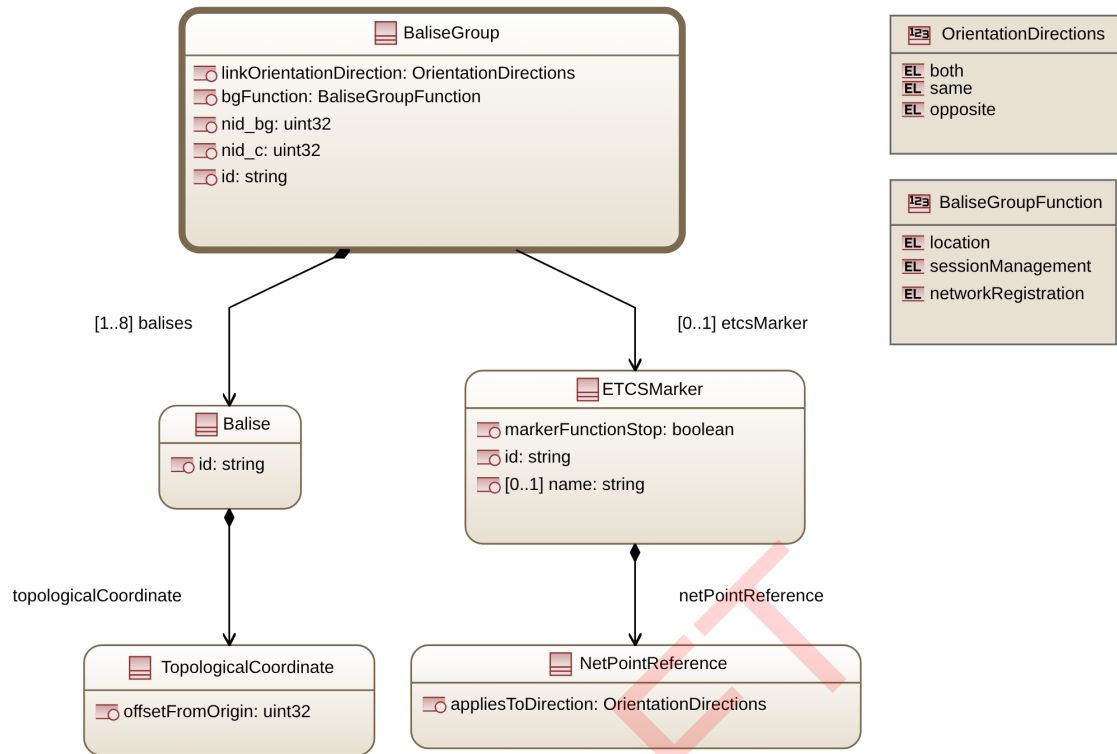


Figure 25 Tree View of BaliseGroup

SPT2TS-125471 - BaliseGroup

```

{
  "structs": [
    {
      "name": "BaliseGroup",
      "info": "Defines a group of balises.",
      "belongsToSubPackage": "FunctionalArea",
      "attrs": [
        { "intId": 1, "name": "id", "dataType": "string", "key": "global", "info": "Identity of the object; used for referencing" },
        { "intId": 2, "name": "nid_bg", "dataType": "uint32", "range": "0..16383", "info": "national identifier of the balise group" },
        { "intId": 3, "name": "nid_c", "dataType": "uint32", "range": "0..1023", "info": "country identifier of the balise group" },
        { "intId": 4, "name": "balises", "composition": "Balise", "multiplicity": "1..8", "ordered": "byIndex", "info": "Defines the balises within the balise group. ETCS-positionInGroup is equal to the position this array" },
        { "intId": 5, "name": "bgFunction", "enumType": "BaliseGroupFunction", "info": "Defines the function of the balise. To be clarified, if derivable from baliseTelegram" },
        { "intId": 6, "name": "linkOrientationDirection", "enumType": "OrientationDirections", "info": "defines linking orientation direction along the LinearElement" },
        { "intId": 7, "name": "etcsMarker", "reference": "ETCSMarker", "multiplicity": "0..1", "info": "defines the etcs marker board reference for the balise" }
      ]
    }
  ]
}

```

```

},
{
  "name": "Balise",
  "info": "Defines a technical device on the railway trackbed",
  "belongsToSubPackage": "FunctionalArea",
  "attrs": [
    {"intId": 1, "name": "id", "dataType": "string", "key": "global", "info": "Identity of the object; used for referencing"},
    {"intId": 2, "name": "topologicalCoordinate", "composition": "TopologicalCoordinate", "info": "location on TrackEdge"}
  ]
},
{
  "enums": [
    {
      "name": "BaliseGroupFunction",
      "enumLiterals": [
        {"intId": 0, "name": "location", "info": "has a location function"},
        {"intId": 1, "name": "sessionManagement", "info": "has a session management function"},
        {"intId": 2, "name": "networkRegistration", "info": "has a network registration function"},
        {"intId": 3, "name": "levelTransitionAnnouncement", "info": "has a level transition announcement function"},
        {"intId": 4, "name": "stopIfInStaffResponsible", "info": "has a stop-if-in-staff-responsible function"},
        {"intId": 5, "name": "temporarySpeedRestrictionAnnouncement", "info": "has a temporary speed restriction announcement function"},
        {"intId": 6, "name": "border", "info": "has a border function"},
        {"intId": 7, "name": "handover", "info": "has a handover function"},
        {"intId": 8, "name": "infill", "info": "performs the function of infill"},
        {"intId": 9, "name": "temporarySpeedRestrictionRevocation", "info": "has a temporary speed restriction revocation"},
        {"intId": 10, "name": "sessionEstablishment", "info": "has a session establishment function"},
        {"intId": 11, "name": "sessionTermination", "info": "has a session termination function"},
        {"intId": 12, "name": "levelTransitionOrder", "info": "has a level level transition order function"},
        {"intId": 13, "name": "stopIfInShunting", "info": "has a stop-if-in-shunting function"}
      ]
    }
  ]
}

```

2.5.1 Example for balise group

```

{
  "id": "bg2",
  "balises": [
    {"id": "b1", "spotLocation": {"trackEdge": "te1", "pos": 1000}}, <--- with position in group == 0
    {"id": "b2", "spotLocation": {"trackEdge": "te1", "pos": 4000}}, <--- with position in group == 1
    {"id": "b3", "spotLocation": {"trackEdge": "te1", "pos": 7000}}, <--- with position in group == 2
    {"id": "b4", "spotLocation": {"trackEdge": "te1", "pos": 10000}}, <--- with position in group == 3
  ]
}

```



2.6 Track Properties

SPT2TS-63859 - Track properties is a container for different classes which define properties for a section of track. The following properties are defined as a part of it:

1. Track Condition: Defines the type of the condition valid for a section of track.
2. Track Edge Loading Gauge: Defines the loading gauge applicable for a section of track.
3. Track Edge Gauge: Defines the gauge (i.e., 1000mm, 1435mm, ...) applicable for a section of track.
4. Current Limitation: Defines the applicable current limitation in Amperes for a section of track.
5. Permitted Braking Distance: Defines the permitted braking distance for the train to come to stop before danger areas like Level Crossing, unplanned Radio holes, etc

6. Traction System: Defines the equipped traction system on the track.

The following equivalent classes from other models can be referred to:

- Track Condition, Loading Gauge, Gauge, Traction System, Current Limitation, and Permitted Braking Distance in  SPT2TS-7 - RCA Digital Map – MAP Object Catalogue [RCA.Doc.69]
- Loading Gauge, Gauge, Voltage, Current Limitation, and Permitted Braking Distance in  SPT2TS-9 - LinX4Rail CDM ->PSM (Platform Specific Data Model)

[Open]

SPMS-7491 - PropertiesArea

Defines the container properties area within INFRA Domain

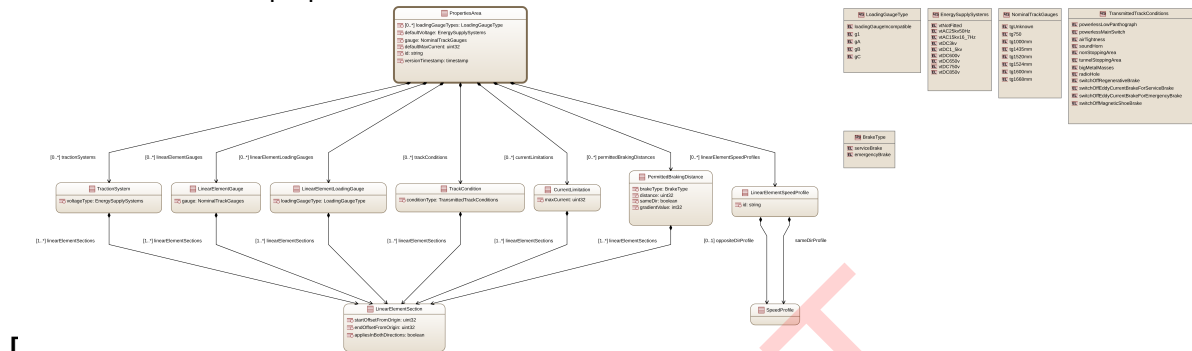


Figure 26 Tree View of PropertiesArea

SPT2TS-63833 - TrackProperties enumerations

```
{
  "enums": [
    {
      "name": "LoadingGaugeType",
      "info": "Defining the loading gauge profile of a train",
      "enumLiterals": [
        {"intId": 0, "name": "loadingGaugeIncompatible", "info": "The train does not fit to any of the interoperable loading gauge profiles"},
        {"intId": 1, "name": "g1", "info": "belongs to type g1"},
        {"intId": 2, "name": "gA", "info": "belongs to type gA"},
        {"intId": 3, "name": "gB", "info": "belongs to type gB"},
        {"intId": 4, "name": "gC", "info": "belongs to type gC"}
      ]
    },
    {
      "name": "TransmittedTrackConditions",
      "info": "List of track conditions",
      "enumLiterals": [
        {"intId": 0, "name": "powerlessLowPanthograph", "info": "Powerless section, lower Pantograph"},
        {"intId": 1, "name": "powerlessMainSwitch", "info": "Powerless section, switch off main power switch"},
        {"intId": 2, "name": "airTightness", "info": "defines a air tightness section"}
      ]
    }
  ]
}
```

```

{ "intId": 3, "name": "soundHorn", "info": "defines a sound horn section"},
{ "intId": 4, "name": "nonStoppingArea", "info": "defines a non stopping area"},
{ "intId": 5, "name": "tunnelStoppingArea", "info": "defines a tunnel stopping area"},
{ "intId": 6, "name": "bigMetalMasses", "info": "Big metal masses, ignore on-board integrity check
alarm of balise transmission"},
{ "intId": 7, "name": "radioHole", "info": "stop supervision of the loss of safe radio connection"},
{ "intId": 8, "name": "switchOffRegenerativeBrake", "info": "defines a switch Off Regenerative Brake
sections"},
{ "intId": 9, "name": "switchOffEddyCurrentBrakeForServiceBrake", "info": "defines a switch Off Eddy
Current Brake sections"},
{ "intId": 10, "name": "switchOffEddyCurrentBrakeForEmergencyBrake", "info": "defines a switch Off
Eddy Current Emergency Brake sections"},
{ "intId": 11, "name": "switchOffMagneticShoeBrake", "info": "defines a switch Off Magnetic Shoe
Brake sections"}
]
},
{
  "name": "BrakeType",
  "enumLiterals": [
    { "intId": 0, "name": "serviceBrake", "info": "defines service brake"},
    { "intId": 1, "name": "emergencyBrake", "info": "defines emergency brake"}
  ]
},
{
  "name": "EnergySupplySystems",
  "info": "List defining Voltage types",
  "enumLiterals": [
    { "intId": 0, "name": "vtNotFitted", "info": "Line not fitted (not electrified) with any traction system"},
    { "intId": 1, "name": "vtAC25kv50Hz", "info": "AC 25kV 50Hz",
      "ontology": { "owl:sameAs": "http://data.europa.eu/949/concepts/energy-supply-systems/rinf/AC10" }},
    { "intId": 2, "name": "vtAC15kv16_7Hz", "info": "AC 15kV 16.7Hz",
      "ontology": { "owl:sameAs": "http://data.europa.eu/949/concepts/energy-supply-systems/rinf/AC20" }},
    { "intId": 3, "name": "vtDC3kv", "info": "DC 3kV",
      "ontology": { "owl:sameAs": "http://data.europa.eu/949/concepts/energy-supply-systems/rinf/DC30" }},
    { "intId": 4, "name": "vtDC1_5kv", "info": "DC 1.5kV",
      "ontology": { "owl:sameAs": "http://data.europa.eu/949/concepts/energy-supply-systems/rinf/DC40" }},
    { "intId": 5, "name": "vtDC600v", "info": "DC 600V",
      "ontology": { "owl:sameAs": "http://data.europa.eu/949/concepts/energy-supply-systems/rinf/DC80" }},
    { "intId": 6, "name": "vtDC650v", "info": "DC 650V",
      "ontology": { "owl:sameAs": "http://data.europa.eu/949/concepts/energy-supply-systems/rinf/DC70" }},
    { "intId": 7, "name": "vtDC750v", "info": "DC 750V",
      "ontology": { "owl:sameAs": "http://data.europa.eu/949/concepts/energy-supply-systems/rinf/DC60" }},
    { "intId": 8, "name": "vtDC850v", "info": "DC 850V",
      "ontology": { "owl:sameAs": "http://data.europa.eu/949/concepts/energy-supply-systems/rinf/DC90" }},
  ]
}

```

```

},
{
  "name": "NominalTrackGauges",
  "enumLiterals": [
    {"intId": 0, "name": "tgUnknown", "info": "Unknown"},
    {"intId": 1, "name": "tg750", "ontology": {"owl:sameAs": "http://data.europa.eu/949/concepts/nominal-track-gauges/rinf/10"}, "info": "gauge type 750mm"},
    {"intId": 2, "name": "tg1000mm", "ontology": {"owl:sameAs": "http://data.europa.eu/949/concepts/nominal-track-gauges/rinf/20"}, "info": "gauge type 1000mm"},
    {"intId": 3, "name": "tg1435mm", "ontology": {"owl:sameAs": "http://data.europa.eu/949/concepts/nominal-track-gauges/rinf/30"}, "info": "gauge type 1435mm"},
    {"intId": 4, "name": "tg1520mm", "ontology": {"owl:sameAs": "http://data.europa.eu/949/concepts/nominal-track-gauges/rinf/40"}, "info": "gauge type 1520mm"},
    {"intId": 5, "name": "tg1524mm", "ontology": {"owl:sameAs": "http://data.europa.eu/949/concepts/nominal-track-gauges/rinf/50"}, "info": "gauge type 1524mm"},
    {"intId": 6, "name": "tg1600mm", "ontology": {"owl:sameAs": "http://data.europa.eu/949/concepts/nominal-track-gauges/rinf/60"}, "info": "gauge type 1600mm"},
    {"intId": 7, "name": "tg1668mm", "ontology": {"owl:sameAs": "http://data.europa.eu/949/concepts/nominal-track-gauges/rinf/70"}, "info": "gauge type 1668mm"}
  ]
}
]
}

```

SPT2TS-125457 - PropertiesArea

```

{
  "structs": [
    {
      "name": "PropertiesArea",
      "info": "Defines the container properties area within INFRA Domain",
      "attrs": [
        {"intId": 1, "name": "id", "dataType": "string", "key": "global", "sameKeyAs": "TopoArea", "info": "Identity of the object; used for referencing"},
        {"intId": 2, "name": "versionTimestamp", "dataType": "timestamp", "info": "version information which is valid since timestamp"},
        {"intId": 3, "name": "gauge", "enumType": "NominalTrackGauges", "info": "Defines the default gauge in the area. Deviations are covered in trackEdgeGauges"},
        {"intId": 4, "name": "loadingGaugeTypes", "enumType": "LoadingGaugeType", "multiplicity": "*", "info": "Defines a list of supported loading gauges per default"},
        {"intId": 5, "name": "defaultVoltage", "enumType": "EnergySupplySystems", "info": "defines default Voltage"},
        {"intId": 6, "name": "defaultMaxCurrent", "dataType": "uint32", "unit": "A", "info": "Defines the default maximum current for the section of track. Used in ATO & ETCS.packet40"},
        {"intId": 7, "name": "linearElementSpeedProfiles", "composition": "LinearElementSpeedProfile", "multiplicity": "*", "ordered": "byKey", "info": "composes of linear element speed profiles"},
        {"intId": 8, "name": "linearElementGauges", "composition": "LinearElementGauge", "multiplicity": "*", "info": "composes of linear element gauges"}
      ]
    }
  ]
}

```

```
{
  "intId": 9, "name": "linearElementLoadingGauges", "composition": "LinearElementLoadingGauge",
  "multiplicity": "*", "info": "composes of linear element loading gauges"},
  {
    "intId": 10, "name": "trackConditions", "composition": "TrackCondition", "multiplicity": "*", "info":
    "composes of track conditions"},
    {
      "intId": 11, "name": "currentLimitations", "composition": "CurrentLimitation", "multiplicity": "*", "info":
      "composes of current limitation"},
      {
        "intId": 12, "name": "permittedBrakingDistances", "composition": "PermittedBrakingDistance",
        "multiplicity": "*", "info": "composes of permitted braking distances"},
        {
          "intId": 13, "name": "tractionSystems", "composition": "TractionSystem", "multiplicity": "*", "info":
          "composes of traction systems"}
        ]
      }
    ]
  }
```

SPT2TS-125458 - LinearElementGauge (TrackEdgeGauge)

```
{
  "structs": [
    {
      "name": "LinearElementGauge",
      "info": "Defines the inner distance between two rails, e.g. 1432 for EU-standard-rails",
      "attrs": [
        {
          "intId": 1, "name": "linearElementSections", "composition": "LinearElementSection", "multiplicity":
          "1..*", "info": "composes of track edge sections"},
          {
            "intId": 2, "name": "gauge", "enumType": "NominalTrackGauges", "info": "defines different track
            gauges"}
          ]
        }
      ]
    }
```

SPT2TS-125459 - LinearElementLoadingGauge

```
{
  "structs": [
    {
      "name": "LinearElementLoadingGauge",
      "info": "Defines linear element loading gauge on the track",
      "attrs": [
        {
          "intId": 1, "name": "linearElementSections", "composition": "LinearElementSection", "multiplicity":
          "1..*", "info": "composes of track edge sections"},
          {
            "intId": 2, "name": "loadingGaugeType", "enumType": "LoadingGaugeType", "info": "defines different
            loading gauges"}
          ]
        }
      ]
    }
```

SPT2TS-125453 - TrackCondition

```
{
  "structs": [
    {
```

```

"name": "TrackCondition",
"info": "Defines the TrackConditions for a section of track",
"attrs": [
{"intId": 1, "name": "linearElementSections", "composition": "LinearElementSection", "multiplicity":
"1..*", "info": "composes of track edge sections"},
{"intId": 2, "name": "conditionType", "enumType": "TransmittedTrackConditions", "info": "defines
different track conditions"}
]
}]
} []

```

SPT2TS-125454 - CurrentLimitation

```

{
"structs": [
{
"name": "CurrentLimitation",
"info": "Defines max current for a list of track sections",
"attrs": [
{"intId": 1, "name": "linearElementSections", "composition": "LinearElementSection", "multiplicity":
"1..*", "info": "composes of track edge sections"},
{"intId": 2, "name": "maxCurrent", "dataType": "uint32", "unit": "A", "info": "defines max current value"}
]
}]
} []

```

SPT2TS-125455 - PermittedBrakingDistance

```

{
"structs": [
{
"name": "PermittedBrakingDistance",
"info": "Defines max allowed braking distance for a list of linear element sections or segment profile",
"attrs": [
{"intId": 1, "name": "linearElementSections", "composition": "LinearElementSection", "multiplicity":
"1..*", "info": "Defines the set of linear element sections composing the application area"},
{"intId": 2, "name": "distance", "dataType": "uint32", "unit": "m", "info": "Defines the applicable
permitted braking distance"},
{"intId": 3, "name": "brakeType", "enumType": "BrakeType", "info": "Defines the applicable brake type
for permitted braking distance"},
{"intId": 4, "name": "gradientValue", "dataType": "int32", "unit": "permill", "exp": -1, "info": "Defines the
gradient value. Required Resolution is 0.1 permill; positiv: uphill, negative: downhill"},
{"intId": 5, "name": "sameDir", "dataType": "boolean", "info": "Defines the usage direction of the
linear element ;true: active in same direction as linear element, false: active in opposite direction"}
]
}]
} []

```

SPT2TS-125456 - TractionSystem

```

{

```

```

"structs": [
{
"name": "TractionSystem",
"info": "Defines the equipped traction system on the track",
"attrs": [
{"intId": 1, "name": "linearElementSections", "composition": "LinearElementSection", "multiplicity":
"1..*", "info": "composes of track edge sections"},
{"intId": 2, "name": "voltageType", "enumType": "EnergySupplySystems", "info": "defines the different
voltage types"}
]
}]
} []

```

2.7 Track usage area

SPMS-2761 - Work Item does not exist.

SPT2TS-125460 - TrackUsageArea

```

{
"structs": [
{
"name": "TrackUsageArea",
"info": "Defines the preferred usage specification, most usable for TMS and planning",
"attrs": [
{"intId": 1, "name": "id", "dataType": "string", "key": "global", "sameKeyAs": "TopoArea", "info": "Identity
of the object; used for referencing"},
{"intId": 2, "name": "versionTimestamp", "dataType": "timestamp", "info": "version information which
is valid since timestamp"},
{"intId": 3, "name": "secondaryTracks", "reference": "LinearElement", "multiplicity": "*", "ordered":
"byKey", "info": "Defines the list of secondary tracks. All tracks except 'shuntingTracks' and
'secondaryTracks' are 'mainTracks'"},
{"intId": 4, "name": "shuntingTracks", "reference": "LinearElement", "multiplicity": "*", "ordered":
"byKey", "info": "Defines the list of shunting tracks. All tracks except 'shuntingTracks' and
'secondaryTracks' are 'mainTracks'"},
{"intId": 5, "name": "preferredSameDir", "reference": "LinearElement", "multiplicity": "*", "ordered":
"byKey", "info": "Defines the list of linear elements with preferred direction identical to the Linear
element-Direction"},
{"intId": 6, "name": "preferredOppositeDir", "reference": "LinearElement", "multiplicity": "*", "ordered":
"byKey", "info": "Defines the list of linear elements with preferred direction opposite to the Linear
element-Direction"}
]
}
]
} []

```


2.8 Speed Profiles

SPT2TS-63860 - Speed profiles represent a base object that defines the speed restrictions for a section of track. Specific speed profiles are defined as an extension to this base object.

The following different kinds of speed restrictions exist:

1. The Static Speed Profile (SSP) is a description of the fixed speed restrictions of a given section of track. The speed restrictions can be related to, e.g. maximum line speed, curves, points, tunnel profiles, and bridges.
 1. The specific SSP categories, as defined in ETCS Subset 026, are decomposed into two types:
 - The “Cant Deficiency” SSP categories: the cant deficiency value assigned to one category shall define the maximum speed, determined by suspension design, at which a particular train can traverse a curve. It thus can be used to set a specific speed limit in a curve with regard to this category.
 - The “other specific” SSP categories: group all other specific SSP categories corresponding to the other international train categories.
1. The Axle load speed profiles define restrictive speed profiles for sections of track based on the different axle load categories defined in ETCS Subset 026.

DRAFT

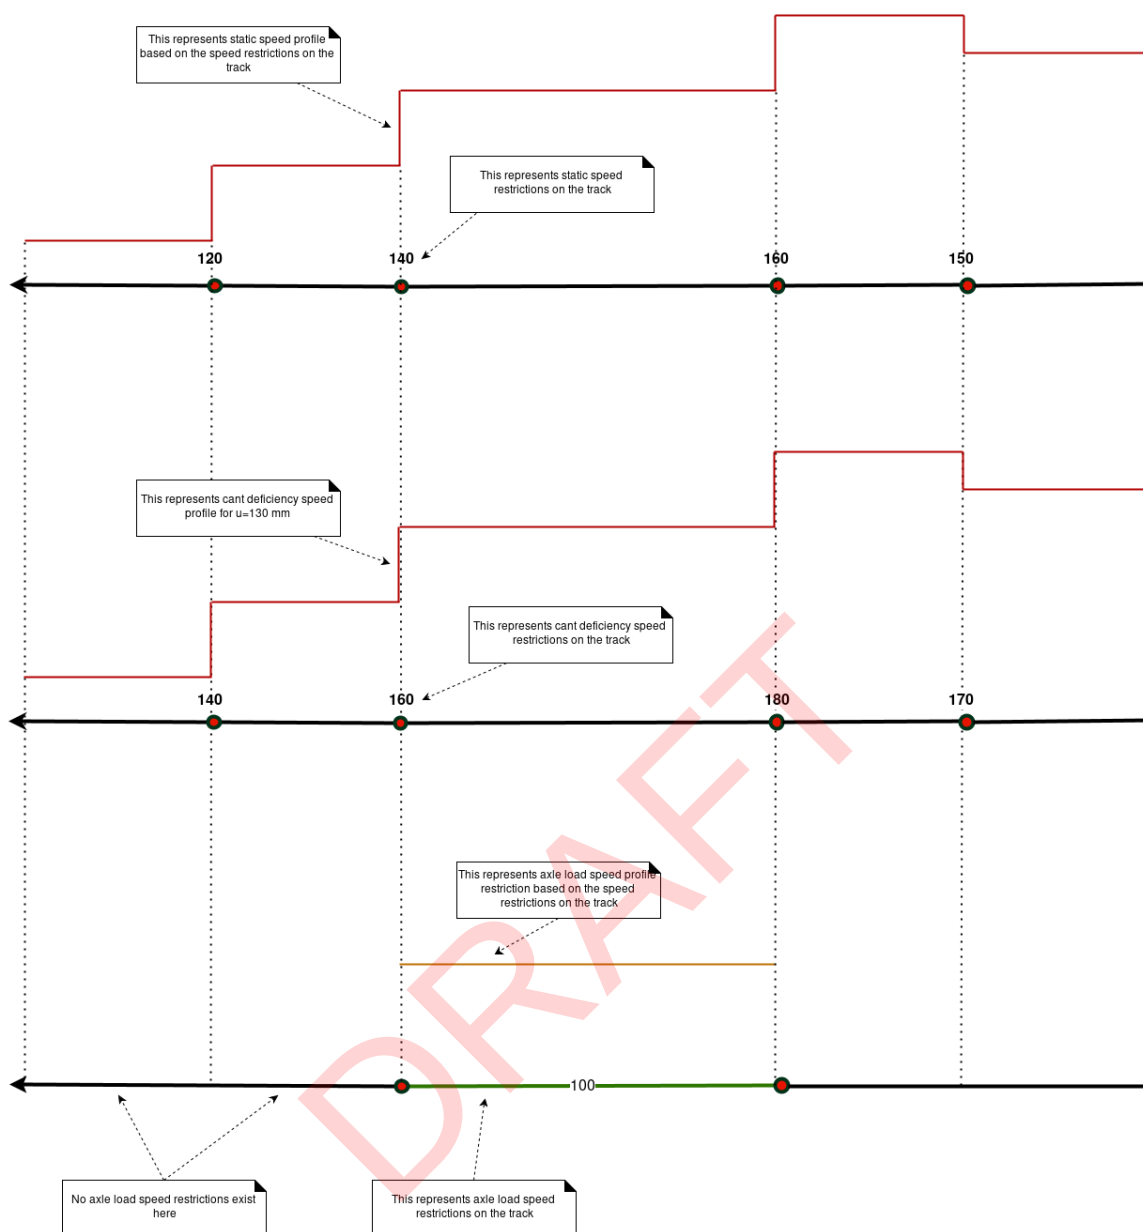



Figure 27 Illustration of different Speed Profiles

The following equivalent classes from other models can be referred to:

- Speed Profiles in  SPT2TS-7 - RCA Digital Map – MAP Object Catalogue [RCA.Doc.69]

[ Open]

SPMS-7499 - LinearElementSpeedProfile

Defines the permitted speeds for a linear element in both directions

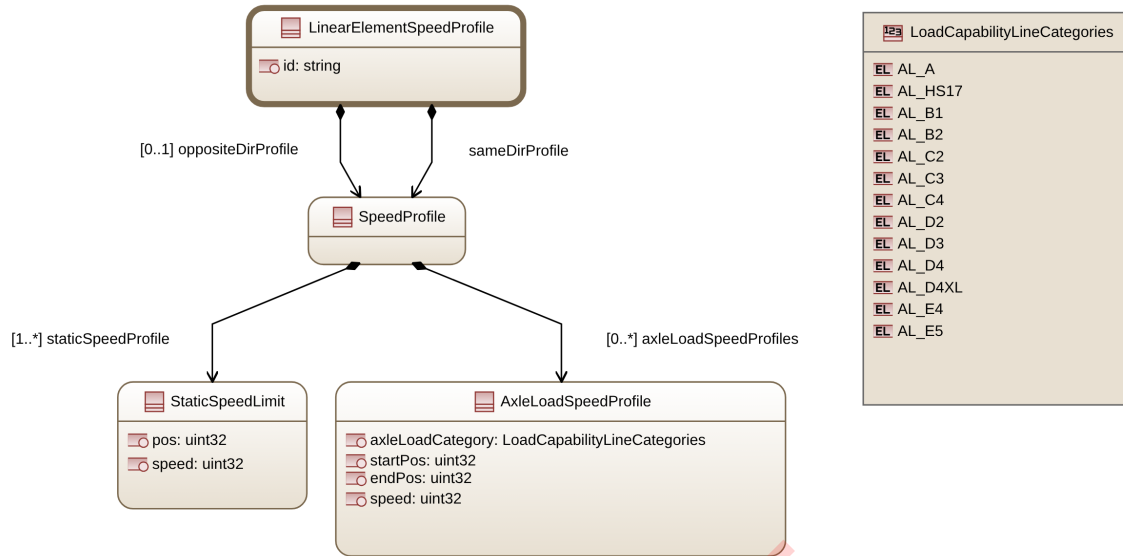


Figure 28 Tree View of LinearElementSpeedProfile

SPT2TS-49086 - LinearElementSpeedProfile (TrackEdgeSpeedProfile)

```

{
  "structs": [
    {
      "name": "LinearElementSpeedProfile",
      "info": "Defines the permitted speeds for a linear element in both directions",
      "belongsToSubPackage": "PropertiesArea",
      "attrs": [
        { "intId": 1, "name": "id", "dataType": "string", "key": "global", "sameKeyAs": "LinearElement", "info": "Identity of the object; used for referencing"},
        { "intId": 2, "name": "sameDirProfile", "composition": "SpeedProfile", "info": "Defines the speed profile valid in the same direction as the Linear element"},
        { "intId": 3, "name": "oppositeDirProfile", "composition": "SpeedProfile", "multiplicity": "0..1", "info": "Defines the applicable speed profile for the opposite direction of travel with reference to linear element. valid in the opposite direction as the TrackEdge. Skip if the same in both directions."}
      ]
    }
  ]
}

```

SPT2TS-125463 - SpeedProfile

```

{
  "structs": [
    {
      "name": "SpeedProfile",
      "info": "Defines the different applicable speed profiles on the sections of track",
      "attrs": [
        { "intId": 1, "name": "staticSpeedProfile", "composition": "StaticSpeedLimit", "multiplicity": "1..*", "info": "composes of static speed profiles"},
        { "intId": 2, "name": "axleLoadSpeedProfiles", "composition": "AxleLoadSpeedProfile", "multiplicity": "0..*", "info": "composes of axle load speed profiles"}
      ]
    }
  ]
}

```

```

}}
}[]

```

SPT2TS-125464 - StaticSpeedLimit

```

{
  "structs": [
    {
      "name": "StaticSpeedLimit",
      "info": "Defines the static speed profile for a section of linear element",
      "belongsToSubPackage": "PropertiesArea",
      "attrs": [
        {"intId": 1, "name": "pos", "dataType": "uint32", "unit": "m", "exp": -3, "info": "position on the associated LinearElement"},
        {"intId": 2, "name": "speed", "dataType": "uint32", "unit": "km/h", "info": "Defines the applicable speed for the section of track ; Resolution min 5 kmph"},
        {"intId": 3, "name": "specificStaticSpeedLimits", "composition": "SpecificStaticSpeedLimit", "multiplicity": "0..*", "info": "composes of specific static speed profiles"}
      ]
    }
  ]
}[]

```

SPT2TS-125465 - SpecificStaticSpeedLimit

```

{
  "structs": [
    {
      "name": "SpecificStaticSpeedLimit",
      "info": "Defines the specific static speed profile for a section of track",
      "belongsToSubPackage": "PropertiesArea",
      "attrs": [
        {"intId": 1, "name": "speed", "dataType": "uint32", "unit": "km/h", "info": "Defines the applicable speed for the section of track ; Resolution min 5 kmph"},
        {"intId": 2, "name": "specificLimitCategory", "composition": "SpeedLimitCategory", "info": "defines different specific speed limit categories"}
      ]
    }
  ]
}[]

```

SPT2TS-125461 - SpeedLimitCategory

```

{
  "structs": [
    {
      "name": "SpeedLimitCategory",
      "info": "Defines the different applicable speed limit categories on the sections of track",
      "union": true,
      "attrs": [
        {"intId": 1, "name": "otherCategoryReplacesCantDeficiencySSP", "enumType": "OtherSpecificStaticSpeedProfileCategory", "info": "is of type other Category Replaces Cant Deficiency SSP"},
        {"intId": 2, "name": "otherCategoryDoesNotReplaceCantDeficiencySSP", "enumType": "OtherSpecificStaticSpeedProfileCategory", "info": "is of type other Category Replaces Cant Deficiency SSP"},
        {"intId": 3, "name": "cantDeficiencyCategory", "enumType": "CantDeficiencies", "info": "is of type Cant Deficiency Category"}
      ]
    }
  ]
}[]

```

SPT2TS-125462 - AxleLoadSpeedProfile

```

{
  "structs": [
    {
      "name": "AxleLoadSpeedProfile",

```

```

"info": "Defines the axle load speed profile for a section of track or a section of SegmentProfile",
"belongsToSubPackage": "PropertiesArea",
"attrs": [
{"intId": 1, "name": "startPos", "dataType": "uint32", "unit": "m", "exp": -3, "info": "Defines the start position on the associated Linear element"},
{"intId": 2, "name": "endPos", "dataType": "uint32", "unit": "m", "exp": -3, "info": "Defines the end position on the associated Linear element"},
{"intId": 3, "name": "speed", "dataType": "uint32", "unit": "km/h", "info": "Defines the applicable speed for the section of track ; Resolution min 5 kmph"},
{"intId": 4, "name": "axleLoadCategory", "enumType": "LoadCapabilityLineCategories", "info": "defines different axle load categories"}
]
}
} [ ]

```

SPT2TS-126748 - SpeedProfile enumerations

```

{
"enums": [
{
"name": "TrainEndApplicability",
"info": "List of train end applicability types",
"enumLiterals": [
{"intId": 0, "name": "lengthDelay", "info": "Train length delay on validity end point of profile element"},
{"intId": 1, "name": "noLengthDelay", "info": "No Train length delay on validity end point of profile element."}
]
},
{
"name": "OtherSpecificStaticSpeedProfileCategory",
"info": "List of other specific static speed profile categories ",
"enumLiterals": [
{"intId": 0, "name": "SSSP_freightTrainP", "info": "Other SSSP applies to Freight train of type P"},
{"intId": 1, "name": "SSSP_freightTrainG", "info": "Other SSSP applies to Freight train of type G"},
{"intId": 2, "name": "SSSP_passengerTrain", "info": "Other SSSP applies to Passenger train"}
]
},
{
"name": "CantDeficiencies",
"info": "List of cant deficiency speed profile categories",
"enumLiterals": [
{"intId": 0, "name": "CD_Undefined", "info": "annotates inactive cant deficiency"},
{"intId": 1, "name": "CD_80mm", "info": "Applicable for trains capable of compensating cant deficiency of 80mm"},
{"intId": 2, "name": "CD_100mm", "info": "Applicable for trains capable of compensating cant deficiency of 100mm"},
{"intId": 3, "name": "CD_130mm", "info": "Applicable for trains capable of compensating cant deficiency of 130mm"},
{"intId": 4, "name": "CD_150mm", "info": "Applicable for trains capable of compensating cant deficiency of 150mm"},
{"intId": 5, "name": "CD_165mm", "info": "Applicable for trains capable of compensating cant deficiency of 165mm"},
{"intId": 6, "name": "CD_180mm", "info": "Applicable for trains capable of compensating cant deficiency of 180mm"},
{"intId": 7, "name": "CD_210mm", "info": "Applicable for trains capable of compensating cant deficiency of 210mm"},
{"intId": 8, "name": "CD_225mm", "info": "Applicable for trains capable of compensating cant deficiency of 225mm"},
{"intId": 9, "name": "CD_245mm", "info": "Applicable for trains capable of compensating cant deficiency of 245mm"},
{"intId": 10, "name": "CD_275mm", "info": "Applicable for trains capable of compensating cant deficiency of 275mm"}
]
}
]
}

```

```

{ "intId": 11, "name": "CD_300mm", "info": "Applicable for trains capable of compensating cant deficiency of 300mm" }
],
{
  "name": "LoadCapabilityLineCategories",
  "info": "List of axle load speed profile categories",
  "enumLiterals": [
    { "intId": 0, "name": "AL_A", "info": "Applicable for trains falling under axle load category A"},
    { "intId": 1, "name": "AL_HS17", "info": "Applicable for trains falling under axle load category HS17"},
    { "intId": 2, "name": "AL_B1", "info": "Applicable for trains falling under axle load category B1"},
    { "intId": 3, "name": "AL_B2", "info": "Applicable for trains falling under axle load category B2"},
    { "intId": 4, "name": "AL_C2", "info": "Applicable for trains falling under axle load category C2"},
    { "intId": 5, "name": "AL_C3", "info": "Applicable for trains falling under axle load category C3"},
    { "intId": 6, "name": "AL_C4", "info": "Applicable for trains falling under axle load category C4"},
    { "intId": 7, "name": "AL_D2", "info": "Applicable for trains falling under axle load category D2"},
    { "intId": 8, "name": "AL_D3", "info": "Applicable for trains falling under axle load category D3"},
    { "intId": 9, "name": "AL_D4", "info": "Applicable for trains falling under axle load category D4"},
    { "intId": 10, "name": "AL_D4XL", "info": "Applicable for trains falling under axle load category D4XL"},
    { "intId": 11, "name": "AL_E4", "info": "Applicable for trains falling under axle load category E4"},
    { "intId": 12, "name": "AL_E5", "info": "Applicable for trains falling under axle load category E5"}
  ]
}
]
}

```

2.8.1 Applicable direction

The speed profile in the same direction as the LinearElement is assigned to LinearElementSpeedProfile.sameDirSpeedProfile. The speed profile in the opposite direction, if it is different from the "same direction" is assigned to LinearElementSpeedProfile.oppositeDirSpeedProfile. The SpeedProfile is a sampled speed curve, where the speed value defined in some position "pos" is valid in the "increasing" direction. This approach is used for both: same direction and opposite direction speed profiles. If you want to traverse the opposite direction from the End to Begin of the LinearElement ensure proper adjustment of the speed-change-positions.

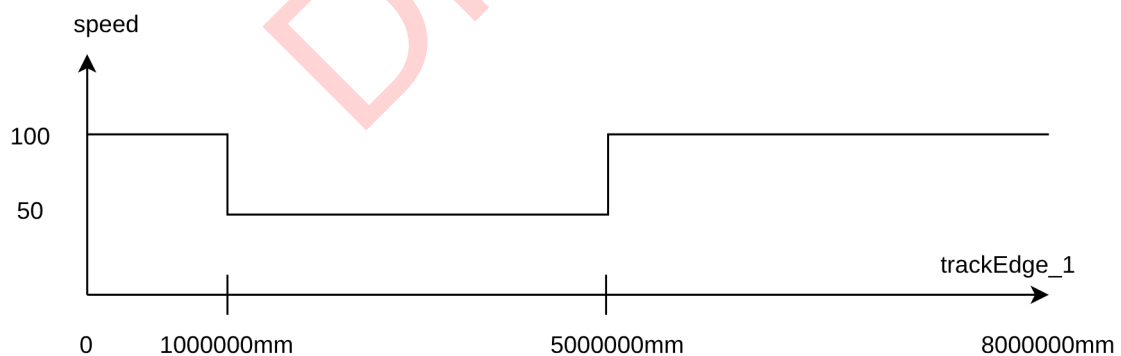


Figure 29 Speed profile in opposite direction.

The data object representing the speed profile for the opposite direction:

```

{
  "trackEdge": "trackEdge_1",
  "oppositeDirProfile": {
    "staticSpeedProfile": [
      { "pos": 0, "speed": 100 },
      { "pos": 1000000, "speed": 50 },
      { "pos": 5000000, "speed": 100 }
    ]
  }
}

```

```
}
}
```

This means, that in the section [5000, 8000] the speed 100 is valid for trains moving in opposite direction of the trackEdge_1.

2.9 ETCS Marker

SPT2TS-64095 - Defines ETCS stop and location markers.


The following equivalent classes from other models can be referred to:

- Signal in  SPT2TS-7 - RCA Digital Map – MAP Object Catalogue [RCA.Doc.69]

[ Open]

SPMS-7505 - ETCSMarker

Defines the ETCS Marker Boards

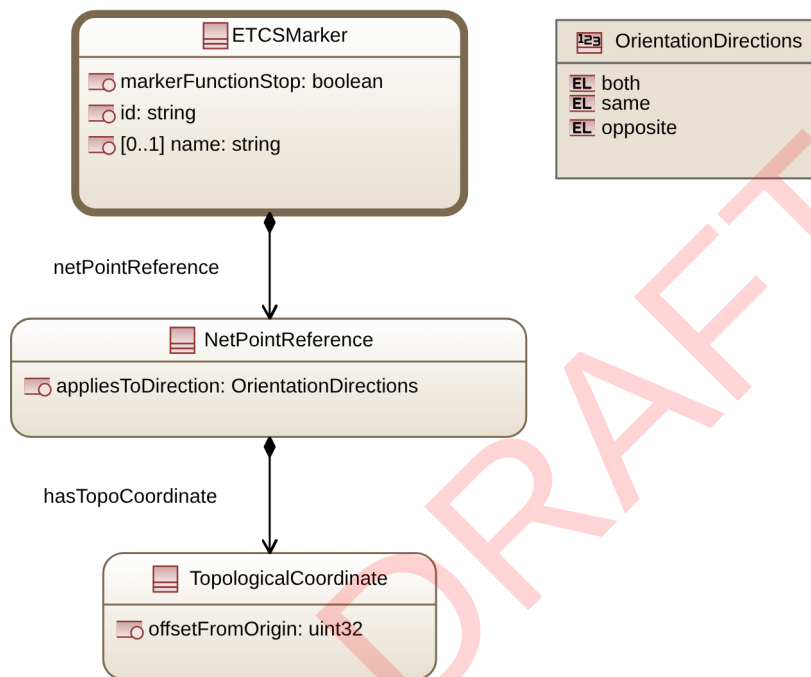

[

Figure 30 Tree View of ETCSMarker

]

SPT2TS-49088 - ETCSMarker

```

{
  "structs" : [
    {
      "name": "ETCSMarker",
      "info": "Defines the ETCS Marker Boards ",
      "belongsToSubPackage": "FunctionalArea",
      "attrs": [
        {"intId": 1, "name": "id", "dataType": "string", "key": "global", "info": "Identity of the object; used for referencing"},
        {"intId": 2, "name": "netPointReference", "composition": "NetPointReference", "info": "Defines position on LinearElement"},
        {"intId": 3, "name": "markerFunctionStop", "dataType": "boolean", "info": "Defines the function associated with the ETCS marker board. true=stop, false=location (when the ETCS marker is a location marker)"}
      ]
    }
  ]
}
  
```

```

{"intId": 4, "name": "name", "dataType": "string", "info": "User-friendly name, only if different from id",
"multiplicity": "0..1"}
]
}}
}[]

```

2.10 Stop Location

SPT2TS-64097 - Defines different stop locations of trains with respect to train size, wagons, axles, or length. The TMS is allowed to stop trains only at StopLocations.
The following equivalent classes from other models can be referred to:

- Signal in  SPT2TS-7 - RCA Digital Map – MAP Object Catalogue [RCA.Doc.69]

[ Open]

SPMS-7506 - StopLocation

Defines the stop locations

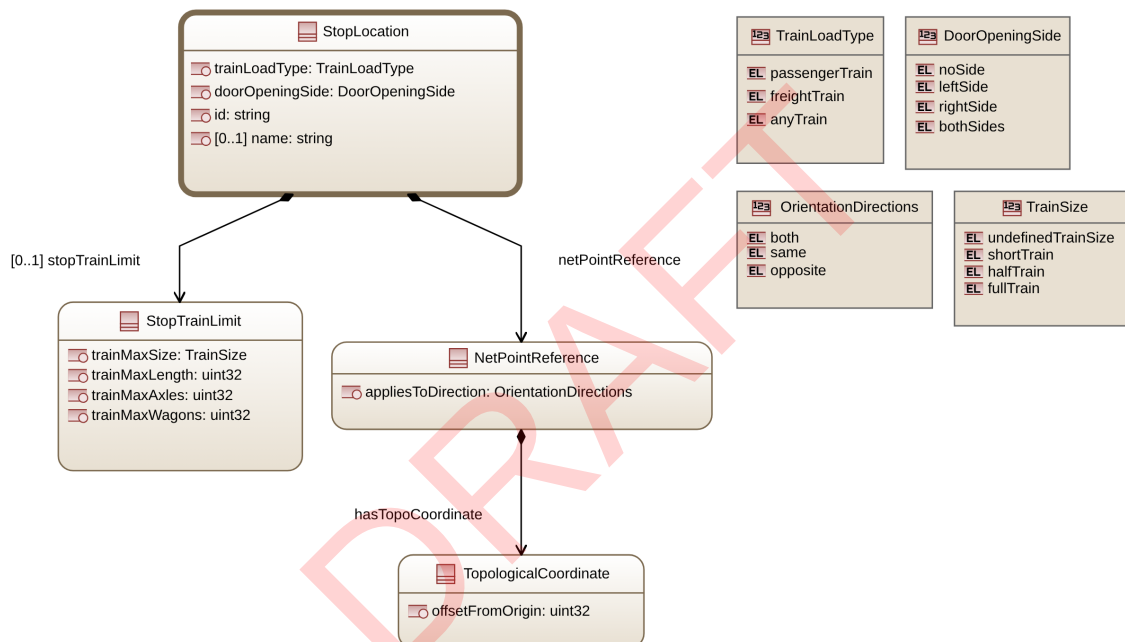


Figure 31 Tree View of StopLocation

SPT2TS-49102 - StopLocation

```

{
"structs": [
{
"name": "StopLocation",
"info": "Defines the stop locations",
"belongsToSubPackage": "FunctionalArea",
"attrs": [
{"intId": 1, "name": "id", "dataType": "string", "key": "global", "info": "Identity of the object; used for referencing"},
{"intId": 2, "name": "netPointReference", "composition": "NetPointReference", "info": "Defines position on LinearElement"},
{"intId": 3, "name": "stopTrainLimit", "composition": "StopTrainLimit", "multiplicity": "0..1", "info": "composes of stop train limits"},

```



```
{
  "intId": 4, "name": "trainLoadType", "enumType": "TrainLoadType", "info": "composes of train load types"},
  {"intId": 5, "name": "doorOpeningSide", "enumType": "DoorOpeningSide", "info": "defines different train opening sides"},
  {"intId": 6, "name": "name", "dataType": "string", "info": "User-friendly name, only if different from id", "multiplicity": "0..1"}
}
}
} []
```

SPT2TS-125466 - StopTrainLimit

```
{
  "structs": [
    {
      "name": "StopTrainLimit",
      "info": "Defines the different stop limits for train on the track",
      "attrs": [
        {"intId": 1, "name": "trainMaxLength", "dataType": "uint32", "unit": "m", "info": "Defines the maximum train length associated with stop train limit. use zero if not defined", "ontology": {"subPropertyOf": "http://data.europa.eu/949/length"}},
        {"intId": 2, "name": "trainMaxAxles", "dataType": "uint32", "info": "Defines the maximum train axles associated with stop train limit. use zero if not defined"},
        {"intId": 3, "name": "trainMaxWagons", "dataType": "uint32", "info": "Defines the maximum train wagons associated with stop train limit. including Locomotives, use zero if not defined"},
        {"intId": 4, "name": "trainMaxSize", "enumType": "TrainSize", "info": "Defines the size of train applicable for this stop train limit. use undefinedTrainSize if not defined"}
      ]
    }
  ]
} []
```

SPT2TS-126749 - StopLocation enumerations



```
{
  "enums": [
    {
      "name": "TrainSize",
      "info": "List defining different train sizes",
      "enumLiterals": [
        {"intId": 0, "name": "undefinedTrainSize", "info": "train size undefined"},
        {"intId": 1, "name": "shortTrain", "info": "defines a short train"},
        {"intId": 2, "name": "halfTrain", "info": "defines a half train"},
        {"intId": 3, "name": "fullTrain", "info": "defines a full train"}
      ]
    },
    {
      "name": "TrainLoadType",
      "enumLiterals": [
        {"intId": 0, "name": "passengerTrain", "info": "defines a passenger train"},
        {"intId": 1, "name": "freightTrain", "info": "defines a freight train"},
        {"intId": 2, "name": "anyTrain", "info": "defines any train"}
      ]
    },
    {
      "name": "DoorOpeningSide",
      "enumLiterals": [
        {"intId": 0, "name": "noSide", "info": "doors do not open in any side"},
        {"intId": 1, "name": "leftSide", "info": "doors on the left side"},
        {"intId": 2, "name": "rightSide", "info": "doors on the right side"},
        {"intId": 3, "name": "bothSides", "info": "doors on both sides"}
      ]
    }
  ]
}
```


```
}}
}[]
```

2.11 Platform

SPT2TS-64099 - Defines the civil infrastructure object platform

The following equivalent classes from other models can be referred to:

- Platform Edge in  SPT2TS-7 - RCA Digital Map – MAP Object Catalogue [RCA.Doc.69]
- Platform in  SPT2TS-9 - LinX4Rail CDM ->PSM (Platform Specific Data Model)

[ Open]

SPMS-7508 - PlatformEdge

Platform for the purpose of RINF is understood as a platform edge. A platform concerns only the part of the structure neighbouring to the track (interfaced with trains).

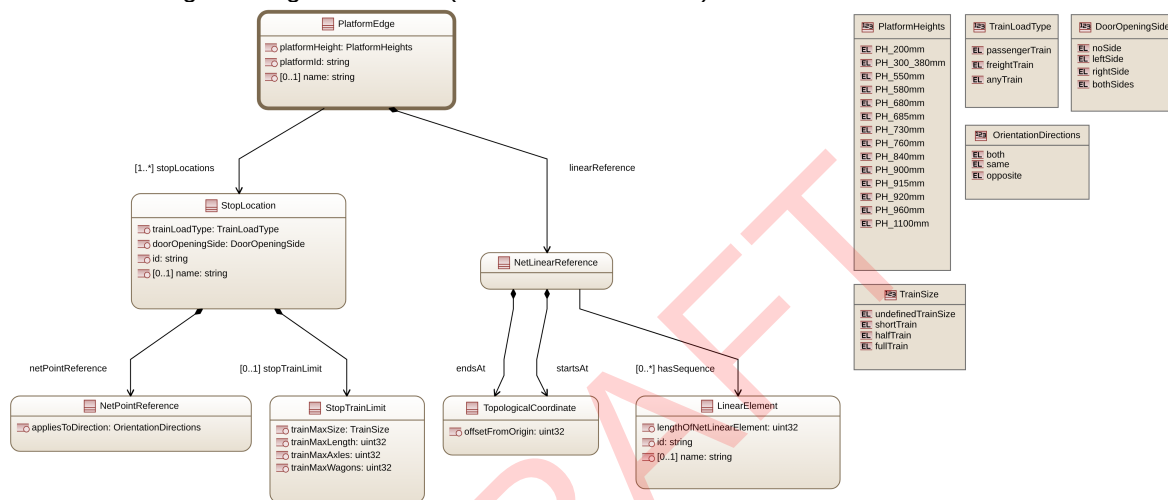


Figure 32 Tree View of PlatformEdge

SPT2TS-49092 - PlatformEdge

```
{
  "structs": [
    {
      "name": "PlatformEdge",
      "info": "Platform for the purpose of RINF is understood as a platform edge. A platform concerns only the part of the structure neighbouring to the track (interfaced with trains).",
      "belongsToSubPackage": "FunctionalArea",
      "attrs": [
        {"intId": 1, "name": "platformId", "dataType": "string", "key": "local", "info": "Unique platform identification or unique platform number within an Operational Point."},
        {"intId": 2, "name": "name", "dataType": "string", "info": "User-friendly name, only if different from id", "multiplicity": "0..1"},
        {"intId": 3, "name": "linearReference", "composition": "NetLinearReference", "info": "composes of linked path"},
        {"intId": 4, "name": "stopLocations", "reference": "StopLocation", "multiplicity": "1..*", "info": "Defines the stop locations. Add only, if stopLocation can be used on that PlatformEdge for passenger/freight exchange", "ordered": "byKey"},
        {"intId": 5, "name": "platformHeight", "enumType": "PlatformHeights", "info": "Distance between the upper surface of platform and running surface of the neighbouring track. It is the nominal value expressed in"}
      ]
    }
  ]
}
```

```
millimetres."}
```

```
}
```

```
}}
```

```
}[ ]
```

SPT2TS-125467 - Platform

```
{
  "structs": [
    {
      "name": "Platform",
      "info": "Defines the object platform",
      "belongsToSubPackage": "FunctionalArea",
      "attrs": [
        {"intId": 1, "name": "id", "dataType": "string", "key": "global", "info": "Identity of the object; used for referencing"},
        {"intId": 2, "name": "name", "dataType": "string", "info": "User-friendly name, only if different from id", "multiplicity": "0..1"},
        {"intId": 3, "name": "platformEdges", "composition": "PlatformEdge", "multiplicity": "1..*", "info": "composes of platform edges"}
      ]
    }
  ]
}
```

SPT2TS-126750 - Platform enumerations


```
{
  "enums": [
    {
      "name": "PlatformHeights",
      "info": "List of nominal height of platform above rail level (refer to TSI infrastructure)",
      "enumLiterals": [
        {"intId": 0, "name": "PH_200mm", "ontology": {"owl:sameAs": "http://data.europa.eu/949/concepts/platform-heights/rinf/60"}, "info": "platform height 200mm"},
        {"intId": 1, "name": "PH_300_380mm", "ontology": {"owl:sameAs": "http://data.europa.eu/949/concepts/platform-heights/rinf/50"}, "info": "platform height 300-380mm"},
        {"intId": 2, "name": "PH_550mm", "ontology": {"owl:sameAs": "http://data.europa.eu/949/concepts/platform-heights/rinf/30"}, "info": "platform height 550mm"},
        {"intId": 3, "name": "PH_580mm", "ontology": {"owl:sameAs": "http://data.europa.eu/949/concepts/platform-heights/rinf/70"}, "info": "platform height 580mm"},
        {"intId": 4, "name": "PH_680mm", "ontology": {"owl:sameAs": "http://data.europa.eu/949/concepts/platform-heights/rinf/80"}, "info": "platform height 680mm"},
        {"intId": 5, "name": "PH_685mm", "ontology": {"owl:sameAs": "http://data.europa.eu/949/concepts/platform-heights/rinf/90"}, "info": "platform height 685mm"},
        {"intId": 6, "name": "PH_730mm", "ontology": {"owl:sameAs": "http://data.europa.eu/949/concepts/platform-heights/rinf/100"}, "info": "platform height 730mm"},
        {"intId": 7, "name": "PH_760mm", "ontology": {"owl:sameAs": "http://data.europa.eu/949/concepts/platform-heights/rinf/40"}, "info": "platform height 760mm"},
        {"intId": 8, "name": "PH_840mm", "ontology": {"owl:sameAs": "http://data.europa.eu/949/concepts/platform-heights/rinf/110"}, "info": "platform height 840mm"},
        {"intId": 9, "name": "PH_900mm", "ontology": {"owl:sameAs": "http://data.europa.eu/949/concepts/platform-heights/rinf/120"}, "info": "platform height 900mm"},
        {"intId": 10, "name": "PH_915mm", "ontology": {"owl:sameAs": "http://data.europa.eu/949/concepts/platform-heights/rinf/130"}, "info": "platform height 915mm"},
        {"intId": 11, "name": "PH_920mm", "ontology": {"owl:sameAs": "http://data.europa.eu/949/concepts/platform-heights/rinf/140"}, "info": "platform height 920mm"},
        {"intId": 12, "name": "PH_960mm", "ontology": {"owl:sameAs": "http://data.europa.eu/949/concepts/platform-heights/rinf/150"}, "info": "platform height 960mm"},
        {"intId": 13, "name": "PH_1100mm", "ontology": {"owl:sameAs": "http://data.europa.eu/949/concepts/platform-heights/rinf/160"}, "info": "platform height 1100mm"}
      ]
    }
  ]
}
```

```

]
}[]

```

SPT2TS-125512 - Example

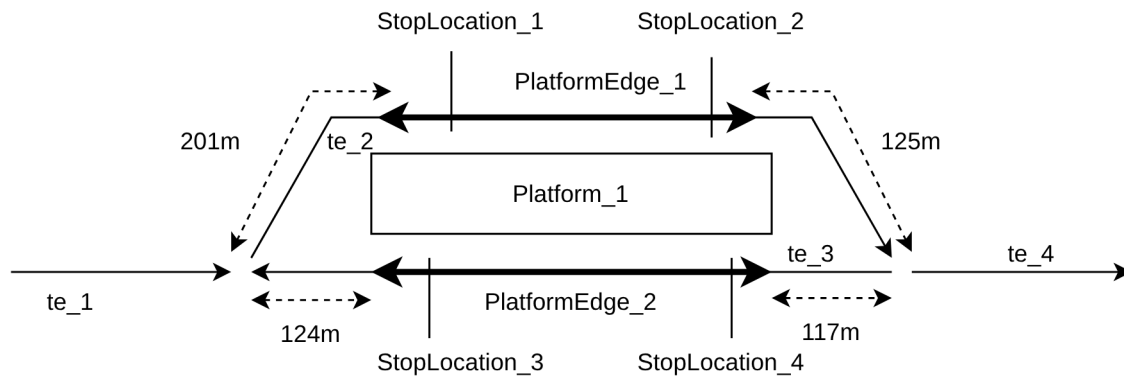

Example for the Platform-object:

```

{
  "id": "Platform_1",
  "name": "Berlin_Gate 1&2",
  "platformEdges": [
    {
      "id": "PlatformEdge_1",
      "name": "Gate 1",
      "linearLocation": { "dirTrackEdges": [{"trackEdge": "te_2", "sameDir": false}], "skipFromPathStart": 125,
        "skipFromPathEnd": 201},
      "stopLocations": ["StopLocation_1", "StopLocation_2"],
      "height": "PH_960mm"
    },
    {
      "id": "PlatformEdge_2",
      "name": "Gate 2",
      "linearLocation": { "dirTrackEdges": [{"trackEdge": "te_3", "sameDir": true}], "skipFromPathStart": 117,
        "skipFromPathEnd": 124},
      "stopLocations": ["StopLocation_3", "StopLocation_4"],
      "height": "PH_960mm"
    }
  ]
}

```

[➡ Open]

2.12 Operational Point

SPT2TS-63863 - An operational point is an area of the railway network, aggregated into a geographical point (with geographical coordinates), that has a distinctive operational function.

Note:

1. Although an Operational Point is illustrated as an area, it is merely just a set of characteristics belonging to a particular location.
2. The centre point is not always located in the centre of the operational point, and corresponding tolerances can be foreseen.

Use Case: Systems which are responsible for planning railway operations might require an overview on this level to determine required points (specific to an operational point) on the topology for timetable planning, journey profile definition, movement permission definition, etc.

The illustration below depicts an Operational Point with its operational characteristics. The definition of Operational Point might not be apt, and it is only defined for pictorial and understanding purposes.

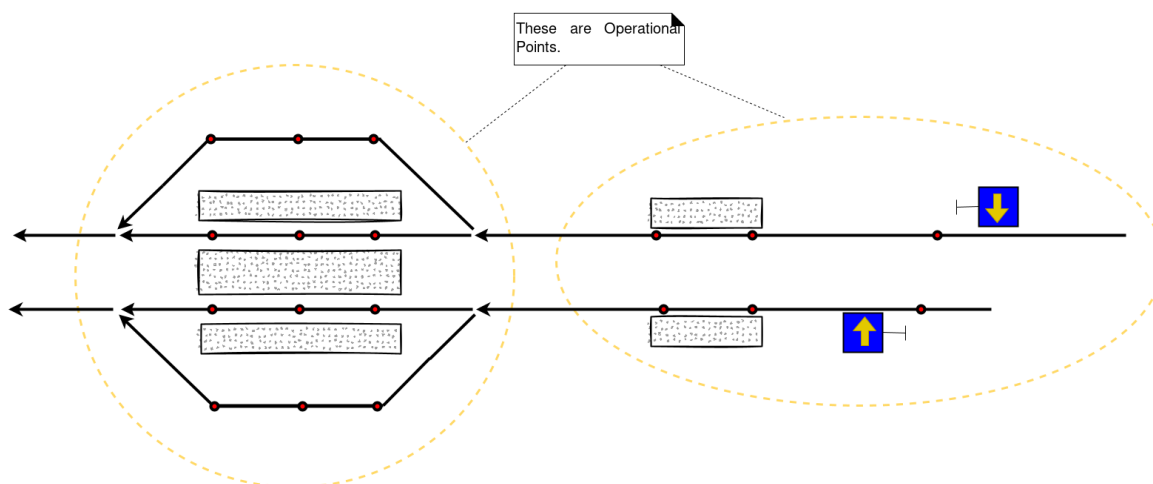




Figure 33 Explanation for Operational Points

The following equivalent classes from other models can be referred to:

- Operational Point in  SPT2TS-7 - RCA Digital Map – MAP Object Catalogue [RCA.Doc.69]
- Operational Point in  SPT2TS-64108 - Guide on the application of the common specifications of the register of Infrac...

[ Open]

SPMS-7510 - OperationalPoint

An operational point (OP) means any location for train service operations, where train services may begin and end or change route, and where passenger or freight services may be provided; operational point also means any location at boundaries between Member States or infrastructure managers. In https://eur-lex.europa.eu/eli/reg_impl/2019/773/oj 2.1.2 Principal locations (stations, yards, junctions, freight terminals).

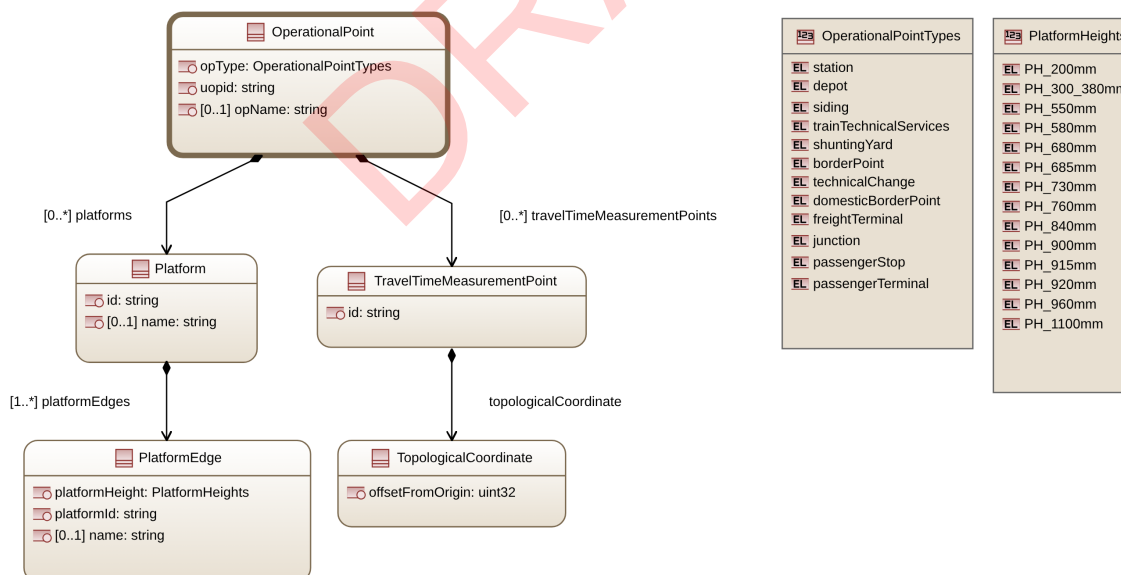


Figure 34 Tree View of OperationalPoint

SPT2TS-49105 - OperationalPoint

{

```

"structs": [
{
  "name": "OperationalPoint",
  "info": "An operational point (OP) means any location for train service operations, where train services may begin and end or change route, and where passenger or freight services may be provided; operational point also means any location at boundaries between Member States or infrastructure managers. In https://eur-lex.europa.eu/eli/reg_impl/2019/773/oj 2.1.2 Principal locations (stations, yards, junctions, freight terminals).",
  "belongsToSubPackage": "FunctionalArea",
  "attrs": [
    { "intId": 1, "name": "uopid", "dataType": "string", "key": "global", "info": "Code composed of country code and alphanumeric operational point code." },
    { "intId": 2, "name": "opName", "dataType": "string", "info": "Name normally related to the town or village or to traffic control purpose.", "multiplicity": "0..1" },
    { "intId": 3, "name": "travelTimeMeasurementPoints", "composition": "TravelTimeMeasurementPoint", "multiplicity": "0..*", "ordered": "byKey", "info": "Defined to measure/define timestamps for passing trains. Stopping-timingPoints can be found via platforms.platformEdges.stopLocations and timingPoint.stopLocation" },
    { "intId": 4, "name": "opType", "enumType": "OperationalPointTypes", "info": "Defines the Type of operational point in relation to the dominating operational functions." },
    { "intId": 5, "name": "platforms", "composition": "Platform", "multiplicity": "0..*", "ordered": "byIndex", "info": "Defines the sequence of platforms is according to the real location, so neighbours are the same in array and reality" }
  ]
}
]
}

```

SPT2TS-126751 - OperationalPoint enumerations

```

{
  "enums": [
    {
      "name": "OperationalPointTypes",
      "info": "List of types for Operational Point",
      "enumLiterals": [
        { "intId": 0, "name": "station", "info": "station with functions, supports international and/or national railway traffic",
          "ontology": { "owl:sameAs": "http://data.europa.eu/949/concepts/op-types/rinf/10" } },
        { "intId": 1, "name": "depot", "info": "group of tracks used by depot or workshop for maintenance",
          "ontology": { "owl:sameAs": "http://data.europa.eu/949/concepts/op-types/rinf/50" } },
        { "intId": 2, "name": "siding", "info": "operational point that describes the embranchment located on the main line that leads to the siding", "ontology": { "owl:sameAs": "http://data.europa.eu/949/concepts/op-types/rinf/130" } },
        { "intId": 3, "name": "trainTechnicalServices", "info": "group of tracks for servicing trains (parking, washing, etc.)",
          "ontology": { "owl:sameAs": "http://data.europa.eu/949/concepts/op-types/rinf/60" } },
        { "intId": 4, "name": "shuntingYard", "info": "group of tracks used for shunting trains, mostly related to freight traffic",
          "ontology": { "owl:sameAs": "http://data.europa.eu/949/concepts/op-types/rinf/100" } },
        { "intId": 5, "name": "borderPoint", "info": "located in the point where a border between Major States or IMs meets a railway line", "ontology": { "owl:sameAs": "http://data.europa.eu/949/concepts/op-types/rinf/90" } },
        { "intId": 6, "name": "technicalChange", "info": "to describe a change of CCS or a type of contact line or a Gauge changeover facility", "ontology": { "owl:sameAs": "http://data.europa.eu/949/concepts/op-types/rinf/110" } },
        { "intId": 7, "name": "domesticBorderPoint", "info": "designated location on the main lines where the infrastructure responsibilities transition between IMs", "ontology": { "owl:sameAs": "http://data.europa.eu/

```

```

949/concepts/op-types/rinf/140"}},
{"intId": 8, "name": "freightTerminal", "info": "station dominantly serving for loading and unloading of freight
trains", "ontology": {"owl:sameAs": "http://data.europa.eu/949/concepts/op-types/rinf/40"}},
{"intId": 9, "name": "junction", "info": "consists of at least one turnout, normally used mostly for changing
direction of trains, with reduced or not existing other functions", "ontology": {"owl:sameAs": "http://
data.europa.eu/949/concepts/op-types/rinf/80"}},
{"intId": 10, "name": "passengerStop", "info": "halts - small operational point consisting of at least one
platform, normally serving mostly for local passenger services, without routing, dispatching, or train
management facilities", "ontology": {"owl:sameAs": "http://data.europa.eu/949/concepts/op-types/rinf/70"}},
{"intId": 11, "name": "passengerTerminal", "info": "station with dominating function of service for passenger
traffic, serving as a central hub for passengers, often integrating rail operations with intermodal transport
networks and large-scale passenger facilities, including ticketing, waiting areas, and other passenger
services", "ontology": {"owl:sameAs": "http://data.europa.eu/949/concepts/op-types/rinf/30"}}
]
}
]
} []

```

SPT2TS-125468 - TravelTimeMeasurementPoint

```

{
  "structs": [
    {
      "name": "TravelTimeMeasurementPoint",
      "info": "Defines the passing time through an OperationalPoint measured at the middle of it",
      "attrs": [
        {"intId": 1, "name": "id", "dataType": "string", "key": "global", "info": "Identity of the object; used for
referencing"},
        {"intId": 2, "name": "topologicalCoordinate", "composition": "TopologicalCoordinate"}
      ]
    }
  ]
}
[]

```

2.13 Timing Point

SPT2TS-63864 - A Timing Point is an ATO-aspect. It is a fixed point on the infrastructure which is associated with the appropriate time. This time may be an arrival time, departure time, or a passing time. The fixed points on the infrastructure can be further elaborated as follows:

- All the ETCS signals where the routes may end or begin and at signals covering danger areas, e.g., tunnels or buffer stops.
- At platforms, e.g., In the center and both ends of the platform
- At stop posts, e.g., based on train lengths (200m, 300m, ...), train size (short, medium, full), Number of Wagons, Number of Axles

In addition, the Timing Points have stopping accuracy information i.e., tolerances which enable trains to come to an accurate stop at Timing Points. To ensure precise stopping, additional requirements on the engineering of balises before Timing Points of relevance are also foreseen.

Use Case: For ATO, Timing Points are referenced in Segment Profiles and Journey Profiles. The Segment Profiles provides the location of the Timing Point and the Journey Profiles provide the time and operational aspects (Stop/Pass/Skip) of the Timing Point. The illustration below depicts a Timing Point with respect to Operational Points.

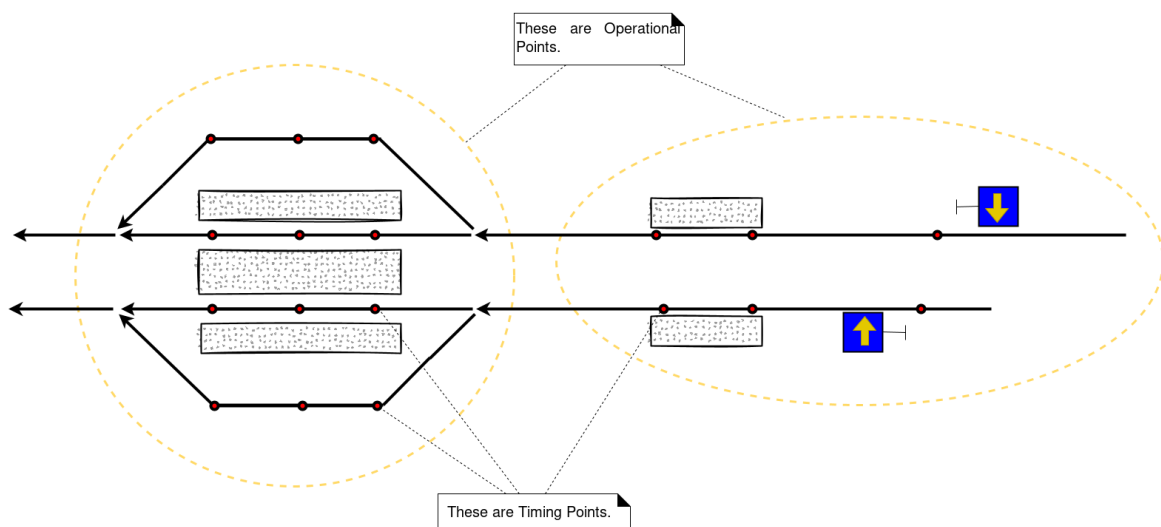


Figure 35 Explanation for Operational Points and Timing Points.


The following equivalent classes from other models can be referred to:

- Timing Point in  SPT2TS-7 - RCA Digital Map – MAP Object Catalogue [RCA.Doc.69]
- Timing Point in  SPT2TS-9 - LinX4Rail CDM ->PSM (Platform Specific Data Model)

[ Open]

SPMS-7559 - TimingPoint

Defines a fixed point on the infrastructure

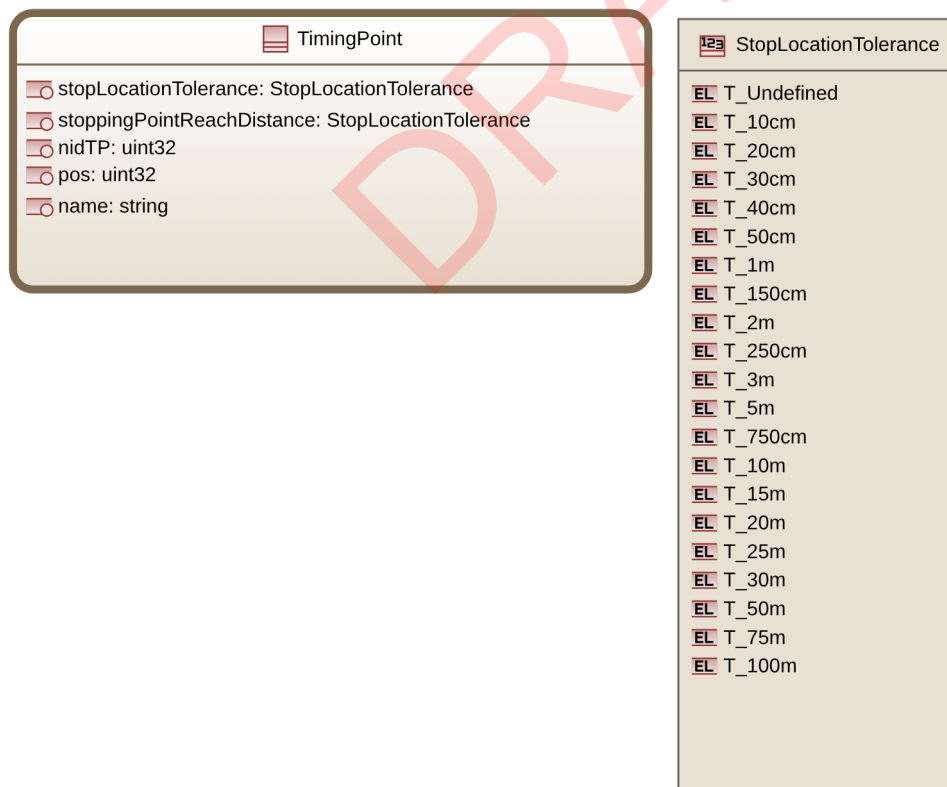

[

Figure 36 Tree View of TimingPoint

]



SPT2TS-125469 - TimingPoint

```
{
  "structs": [
    {
      "name": "TimingPoint",
      "info": "Defines a fixed point on the infrastructure",
      "belongsToSubPackage": "FunctionalArea",
      "attrs": [
        {
          "intId": 1, "name": "id", "dataType": "string", "key": "global", "info": "Identity of the object; used for referencing",
          "multiplicity": "0..1"
        },
        {
          "intId": 2, "name": "topologicalCoordinate", "composition": "TopologicalCoordinate",
          "info": "Defines the functional object in front of which a TimingPoint is located and is active"
        },
        {
          "intId": 3, "name": "activeObject", "composition": "TPActiveObject", "info": "Defines a functional object in front of which a TimingPoint is located and active",
          "union": true,
          "attrs": [
            {
              "intId": 1, "name": "etcsMarker", "reference": "ETCSMarker", "info": "refers to ETCS marker"
            },
            {
              "intId": 2, "name": "stopLocation", "reference": "StopLocation", "info": "refers to stop location"
            },
            {
              "intId": 3, "name": "timeMeasurePoint", "reference": "TravelTimeMeasurementPoint", "info": "refers to travel time measurement point"
            }
          ]
        }
      ]
    }
  ]
}
```

2.14 Tunnel

SPT2TS-64100 - The object tunnel provides a physical representation of the tunnel infrastructure. A tunnel consists Tunnel Tube(s) and Tunnel Portal(s)


The following equivalent classes from other models can be referred to:

- Tunnel in  SPT2TS-7 - RCA Digital Map – MAP Object Catalogue [RCA.Doc.69]
- Tunnel in  SPT2TS-9 - LinX4Rail CDM ->PSM (Platform Specific Data Model)

 Open]

SPMS-7514 - Tunnel

A railway tunnel is an excavation or a construction around the track provided to allow the railway to pass

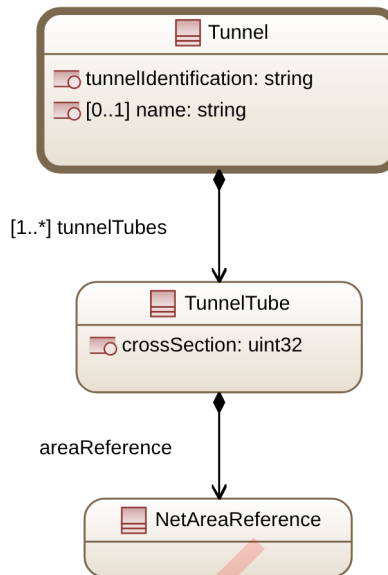

for example higher land, buildings or water. [

Figure 37 Tree View of Tunnel

]


SPT2TS-48967 - Tunnel

```


{
  "structs" : [
    {
      "name": "Tunnel",
      "info": "A railway tunnel is an excavation or a construction around the track provided to allow the railway to pass for example higher land, buildings or water.",
      "belongsToSubPackage": "FunctionalArea",
      "attrs": [
        {
          "intId": 1, "name": "tunnelIdentification", "dataType": "string", "key": "global", "info": "Unique tunnel identification or unique tunnel number within Member State"},
        {
          "intId": 2, "name": "name", "dataType": "string", "info": "User-friendly name, only if different from id", "multiplicity": "0..1"},
        {
          "intId": 3, "name": "tunnelTubes", "composition": "TunnelTube", "multiplicity": "1..*", "info": "composes of tunnel tubes"}
      ]
    },
    {
      "name": "TunnelTube",
      "info": "Defines the tunnels tubes within a tunnel. Main Use-Case identify emergency management with rescue into neighbour tube",
      "belongsToSubPackage": "FunctionalArea",
      "attrs": [
        {
          "intId": 1, "name": "areaReference", "composition": "NetAreaReference", "info": "composes of track area"},
        {
          "intId": 2, "name": "crossSection", "dataType": "uint32", "unit": "m2", "exp": -3, "info": "Defines the standard Cross section dimensions of a tunnel for calculation of air-resistance"}
      ]
    }
  ]
}

```

2.15 Bridge

SPT2TS-64102 - The object bridge provides a physical representation of the bridge infrastructure. [ Open]

SPMS-7516 - Bridge

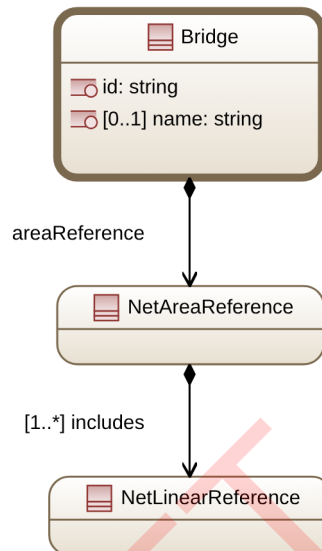

Defines the civil infrastructure object bridge [

Figure 38 Tree View of Bridge

]


SPT2TS-48975 - Bridge

```


{
  "structs": [
    {
      "name": "Bridge",
      "info": "Defines the civil infrastructure object bridge",
      "belongsToSubPackage": "FunctionalArea",
      "attrs": [
        {"intId": 1, "name": "id", "dataType": "string", "key": "global", "info": "Identity of the object; used for referencing"},
        {"intId": 2, "name": "name", "dataType": "string", "info": "User-friendly name, only if different from id", "multiplicity": "0..1"},
        {"intId": 3, "name": "areaReference", "composition": "NetAreaReference", "info": "composes of track area"}
      ]
    }
  ]
}

```

2.16 Underpass

SPT2TS-64103 - The object underpass provides a physical representation of the underpass infrastructure. [ Open]

SPMS-7517 - Underpass

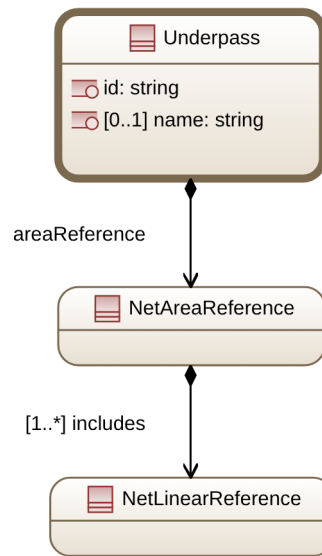

Defines the civil infrastructure object Underpass [

Figure 39 Tree View of Underpass

]

SPT2TS-48976 - Underpass

```

{
  "structs": [
    {
      "name": "Underpass",
      "info": "Defines the civil infrastructure object Underpass",
      "belongsToSubPackage": "FunctionalArea",
      "attrs": [
        {
          "intId": 1, "name": "id", "dataType": "string", "key": "global", "info": "Identity of the object; used for referencing",
        },
        {
          "intId": 2, "name": "name", "dataType": "string", "info": "User-friendly name, only if different from id", "multiplicity": "0..1",
        },
        {
          "intId": 3, "name": "areaReference", "composition": "NetAreaReference", "info": "composes of track area"
        }
      ]
    }
  ]
}

```

2.17 Track Vacancy Proving Section (TVPS)

SPT2TS-64104 - Defines a section along the track for which the occupancy by a movable object can be technically detected. Each track vacancy proving section has a train detectors that are used to detect movable objects on the track.

The following equivalent classes from other models can be referred to:

- Trackside Train Detection Area in  SPT2TS-7 - RCA Digital Map – MAP Object Catalogue [RCA.Doc.69]
- TVP Section in  SPT2TS-9 - LinX4Rail CDM ->PSM (Platform Specific Data Model)
- TVP Section in <https://eulynx.eu/index.php/dataprep>

[ Open]

SPMS-7518 - TvpSection

Defines the train vacancy proving section

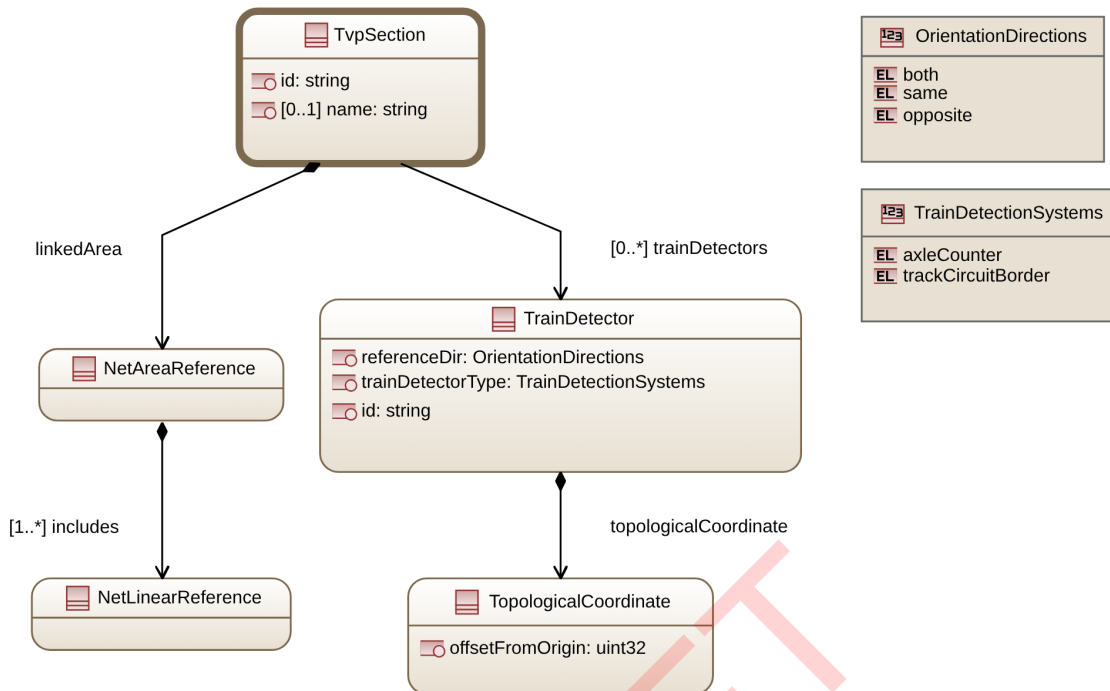


Figure 40 Tree View of TvpSection

SPT2TS-12698 - TvpSection

```

{
  "structs": [
    {
      "name": "TvpSection",
      "info": "Defines the train vacancy proving section",
      "belongsToSubPackage": "FunctionalArea",
      "attrs": [
        {
          "intId": 1, "name": "id", "dataType": "string", "key": "global", "info": "Identity of the object; used for referencing ; structure refers to EULYNX EU.SAS.77",
        },
        {
          "intId": 2, "name": "name", "dataType": "string", "info": "User-friendly name, only if different from id",
          "multiplicity": "0..1",
        },
        {
          "intId": 3, "name": "linkedArea", "composition": "NetAreaReference", "info": "composes of linked area",
        },
        {
          "intId": 4, "name": "trainDetectors", "reference": "TrainDetector", "multiplicity": "0..*", "info": "Defines the set of train detectors"
        }
      ]
    }
  ]
}

```

SPT2TS-125470 - TrainDetector

```

{
  "structs": [
    {
      "name": "TrainDetector",
      "info": "Defines the train detector system for the train vacancy proving section",
      "belongsToSubPackage": "FunctionalArea",
      "attrs": [
        {
          "intId": 1, "name": "id", "dataType": "string", "key": "global", "info": "Identity of the object; used for

```

```
referencing"},
{"intId": 2, "name": "topologicalCoordinate", "composition": "TopologicalCoordinate"},
{"intId": 3, "name": "trainDetectorType", "enumType": "TrainDetectionSystems", "info": "Defines the train
detection system applicable for the TVPS"},
{"intId": 4, "name": "referenceDir", "enumType": "OrientationDirections", "info": "Reference direction
corresponding to linear element in which the train detector detects trains: same/opposite for axleCounter,
both for trackCircuit"}
},
}],
"enums": [
{
"name": "TrainDetectionSystems",
"info": "List defining different train detection systems",
"enumLiterals": [
{"intId": 0, "name": "axleCounter", "info": "defines an axle counter"},
{"intId": 1, "name": "trackCircuitBorder", "info": "defines a track circuit border"}
]
}
]
}[]
```

2.18 Level Crossing

SPT2TS-64101 - Defines the technical object level crossing along the track


The following equivalent classes from other models can be referred to:

- Level Crossing in  SPT2TS-7 - RCA Digital Map – MAP Object Catalogue [RCA.Doc.69]
- Level Crossing in  SPT2TS-9 - LinX4Rail CDM ->PSM (Platform Specific Data Model)

[ Open]

SPMS-7520 - LevelCrossing

A level crossing is an intersection where a railway line crosses a road or a path at the same level. It can be used for the implementation of the ETCS trackside or to identify potential collision scenarios

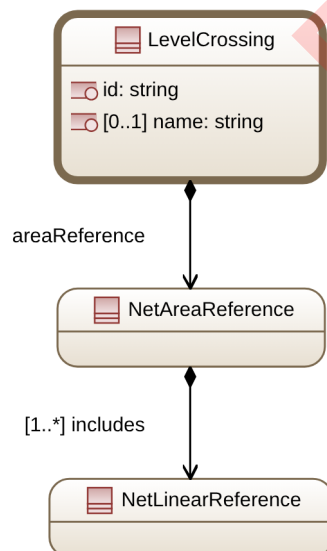

[

Figure 41 Tree View of LevelCrossing

]



SPT2TS-12699 - LevelCrossing

```
{
  "structs": [
    {
      "name": "LevelCrossing",
      "info": "A level crossing is an intersection where a railway line crosses a road or a path at the same level. It can be used for the implementation of the ETCS trackside or to identify potential collision scenarios",
      "belongsToSubPackage": "FunctionalArea",
      "attrs": [
        {"intId": 1, "name": "id", "dataType": "string", "key": "global", "info": "Identity of the object; used for referencing"},
        {"intId": 2, "name": "areaReference", "composition": "NetAreaReference", "info": "composes of track area"},
        {"intId": 3, "name": "name", "dataType": "string", "info": "User-friendly name, only if different from id", "multiplicity": "0..1"}
      ]
    }
  ]
}
```

2.19 National border

SPT2TS-64105 - Defines an object National Border between countries.

The following equivalent classes from other models can be referred to:

- Track Node in  SPT2TS-7 - RCA Digital Map – MAP Object Catalogue [RCA.Doc.69]
- Border in  SPT2TS-9 - LinX4Rail CDM ->PSM (Platform Specific Data Model)

[ Open]

SPMS-7521 - NationalBorder

Defines a border point is used to separate the railway network due to different reasons. Typical examples

are country borders, the change of owning infrastructure manager or the border of a station

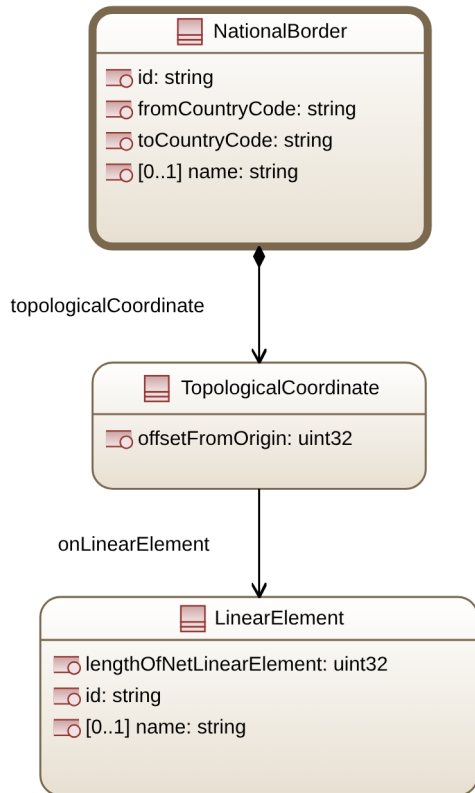


Figure 42 Tree View of NationalBorder

SPT2TS-48983 - NationalBorder

```



{
  "structs": [
    {
      "name": "NationalBorder",
      "info": "Defines a border point is used to separate the railway network due to different reasons. Typical examples are country borders, the change of owning infrastructure manager or the border of a station",
      "belongsToSubPackage": "FunctionalArea",
      "attrs": [
        {
          "intId": 1, "name": "id", "dataType": "string", "key": "global", "info": "Identity of the object; used for referencing",
          "multiplicity": "1"
        },
        {
          "intId": 2, "name": "topologicalCoordinate", "composition": "TopologicalCoordinate",
          "multiplicity": "1"
        },
        {
          "intId": 3, "name": "fromCountryCode", "dataType": "string", "info": "Defines the from country code for the national border in the direction of linear element",
          "multiplicity": "1"
        },
        {
          "intId": 4, "name": "toCountryCode", "dataType": "string", "info": "Defines the to country code for the national border in the direction of linear element",
          "multiplicity": "1"
        },
        {
          "intId": 5, "name": "name", "dataType": "string", "info": "User-friendly name, only if different from id",
          "multiplicity": "0..1"
        }
      ]
    }
  ]
}


```


2.20 Buffer Stop

SPT2TS-100571 - Defines an object buffer stop on the track


The following equivalent classes from other models can be referred to:

- Track Node in  SPT2TS-7 - RCA Digital Map – MAP Object Catalogue [RCA.Doc.69]
- Buffer Stop in  SPT2TS-9 - LinX4Rail CDM ->PSM (Platform Specific Data Model)

[ Open]

SPMS-7522 - BufferStop

Defines the object Buffer stop on the track

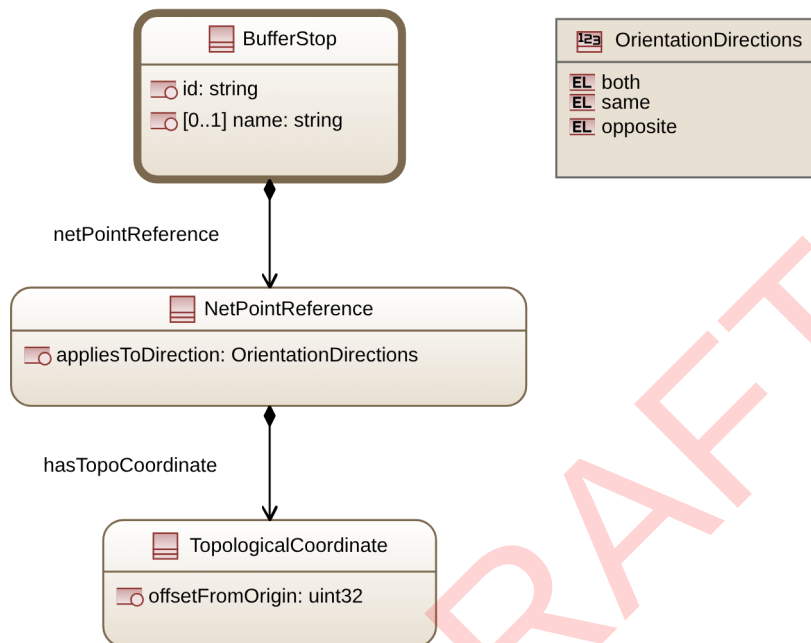

[
 Figure 43 Tree View of BufferStop
]

SPT2TS-100570 - BufferStop

```

{
  "structs": [
    {
      "name": "BufferStop",
      "info": "Defines the object Buffer stop on the track",
      "belongsToSubPackage": "FunctionalArea",
      "attrs": [
        {"intId": 1, "name": "id", "dataType": "string", "key": "global", "info": "Identity of the object; used for referencing"},
        {"intId": 2, "name": "netPointReference", "composition": "NetPointReference", "info": "Defines position on LinearElement"},
        {"intId": 3, "name": "name", "dataType": "string", "info": "User-friendly name, only if different from id", "multiplicity": "0..1"}
      ]
    }
  ]
}

```

2.21 Container for functional objects

SPMS-7523 - FunctionalArea

Defines the container functional area within INFRA Domain

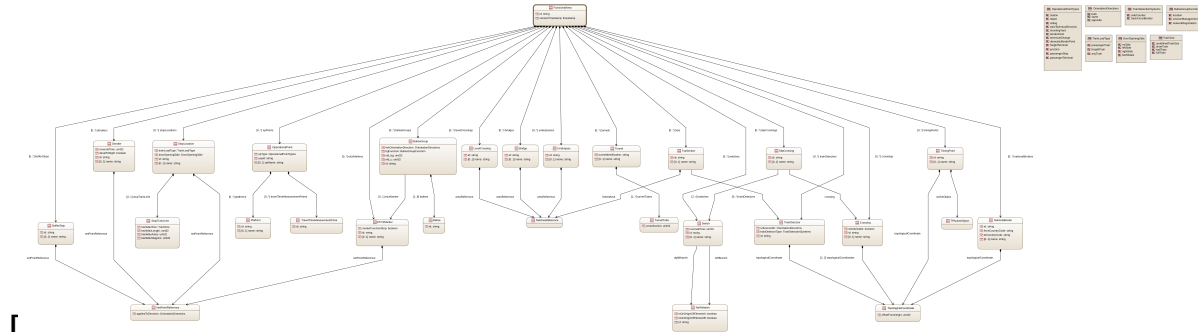


Figure 44 Tree View of FunctionalArea

SPT2TS-63853 - FunctionalArea

```
{
  "structs": [
    {
      "name": "FunctionalArea",
      "info": "Defines the container functional area within INFRA Domain",
      "attrs": [
        {"intId": 1, "name": "id", "dataType": "string", "key": "global", "sameKeyAs": "TopoArea", "info": "Identity of the object; used for referencing"},
        {"intId": 2, "name": "versionTimestamp", "dataType": "timestamp", "info": "version information which is valid since timestamp"},
        {"intId": 3, "name": "opPoints", "composition": "OperationalPoint", "multiplicity": "*", "ordered": "byKey", "info": "Defines the set of operational points"},
        {"intId": 4, "name": "switches", "composition": "Switch", "multiplicity": "*", "ordered": "byKey", "info": "Defines the set of switches"},
        {"intId": 5, "name": "slipCrossings", "composition": "SlipCrossing", "multiplicity": "*", "ordered": "byKey", "info": "Defines the set of slip crossings"},
        {"intId": 6, "name": "derailers", "composition": "Derailer", "multiplicity": "*", "ordered": "byKey", "info": "Defines the set of derailers"},
        {"intId": 7, "name": "crossings", "composition": "Crossing", "multiplicity": "*", "ordered": "byKey", "info": "Defines the set of crossings"},
        {"intId": 8, "name": "trainDetectors", "composition": "TrainDetector", "multiplicity": "*", "ordered": "byKey", "info": "Defines the set of train detectors"},
        {"intId": 9, "name": "baliseGroups", "composition": "BaliseGroup", "multiplicity": "*", "ordered": "byKey", "info": "Defines the set of balise groups"},
        {"intId": 10, "name": "etcsMarkers", "composition": "ETCSMarker", "multiplicity": "*", "ordered": "byKey", "info": "Defines the set of etcs markers"},
        {"intId": 11, "name": "stopLocations", "composition": "StopLocation", "multiplicity": "*", "ordered": "byKey", "info": "Defines the set of stop locations where the train is allowed to stop"},
        {"intId": 12, "name": "tunnels", "composition": "Tunnel", "multiplicity": "*", "ordered": "byKey", "info": "Defines the set of tunnels"}
      ]
    }
  ]
}
```

```

"Defines the set of tunnels"},
{"intId": 13, "name": "bridges", "composition": "Bridge", "multiplicity": "*", "ordered": "byKey", "info":
"Defines the set of bridges"},
{"intId": 14, "name": "underpasses", "composition": "Underpass", "multiplicity": "*", "ordered": "byKey",
"info": "Defines the set of underpasses"},
{"intId": 15, "name": "tvps", "composition": "TvpSection", "multiplicity": "*", "ordered": "byKey", "info":
"Defines the set of track vacancy proving sections"},
{"intId": 16, "name": "levelCrossings", "composition": "LevelCrossing", "multiplicity": "*", "ordered":
"byKey", "info": "Defines the set of level crossings"},
{"intId": 17, "name": "nationalBorders", "composition": "NationalBorder", "multiplicity": "*", "ordered":
"byKey", "info": "Defines the set of national borders"},
{"intId": 18, "name": "bufferStops", "composition": "BufferStop", "multiplicity": "*", "ordered": "byKey",
"info": "Defines the set of buffer stops"},
{"intId": 19, "name": "timingPoints", "composition": "TimingPoint", "multiplicity": "*", "ordered": "byKey",
"info": "Defines the set of timing points, at which TMS would calculate train positions"}
]
}
]
} []

```

2.22 Container for Infrastructure

SPMS-7524 - Infrastructure

Defines the Container for Infrastructure (INFRA)



[

Figure 45 Tree View of Infrastructure

]

SPT2TS-64106 - Infrastructure

```

{
"structs": [
{
"name": "Infrastructure",
"info": "Defines the Container for Infrastructure (INFRA)",
"attrs": [
{"intId": 1, "name": "topoAreas", "composition": "TopoArea", "multiplicity": "*", "ordered": "byKey", "info":
"Defines the set of topo areas"},
{"intId": 2, "name": "geometryAreas", "composition": "GeometryArea", "multiplicity": "*", "ordered":
"byKey", "info": "Defines the set of geometry areas"},
{"intId": 3, "name": "sampledGeometryAreas", "composition": "SampledGeometryArea", "multiplicity": "*",
"ordered": "byKey", "info": "Defines the set of sampled geometry areas"},
{"intId": 4, "name": "functionalAreas", "composition": "FunctionalArea", "multiplicity": "*", "ordered":

```

```
"byKey", "info": "Defines the set of functional areas"},  
{ "intId": 5, "name": "propertiesAreas", "composition": "PropertiesArea", "multiplicity": "*", "ordered":  
  "byKey", "info": "Defines the set of properties areas"},  
{ "intId": 6, "name": "trackUsageAreas", "composition": "TrackUsageArea", "multiplicity": "*", "ordered":  
  "byKey", "info": "Defines the set of track usage areas"}  
}  
}  
}  
}[]
```

SPT2TS-125119 - Here are the scripts generating output. [🔗🔒 Content to be approved]

DRAFT